inserts: page

CK	3	poles + ⏚	36
CK	4	poles + ⏚	36
CKS	3	poles + ⏚	37
CKS	4	poles + ⏚	37
CD	7	poles + ⏚	39
CD	8	poles	40
CQ	5	poles + ⏚	63
CQ	12	poles + ⏚	62

overall dimensions:
21 x 21 mm

bulkhead housings




angled bulkhead housings




description	part No.	part No. (entry - Pg 11)	part No. (entry - M 20)
with lever [1]	**CK 03 I** (white)		
with lever [1]	**CK 03 IN** (black)		
without cable gland outlet, with lever [1]		**CK 03 IA** (white)	
without cable gland outlet, with lever [1]		**CK 03 IAN** (black)	
with threaded entry and lever [1]		**CK 03 IAPS** (white)	**MK IAP20** (white)
with threaded entry and lever [1]		**CK 03 IAPNS** (black)	**MK IAPN20** (black)
seal and screw kit for IP66/IP67 [2] for CK, CQ 05, CKS inserts	**CKR 65**	**CKR 65**	
seal and screw kit for IP66/IP67 [2] for CD 07/08 inserts	**CKR 65 D**	**CKR 65 D**	

panel cut-out for enclosures, in mm



1) enclosures with IP44 degree of protection, obtained by the elimination of the flexible washer normal supplied with the insert
2) To achieve the IP66/IP67 protection rating, a kit is available which includes a seal to be fitted under the insert fastening screw supplied with the kit (see example illustrated), instead of the screw with spring washer supplied with the insert

Note:
The CQ 12 inserts are already fitted with seal and screw, allowing IP66/IP67 protection rating to be achieved.




Type 12
Type 4/4X only
with CKR 65 (D)

dimensions indicated are not binding
and may be changed without notice


dimensions in mm

CK I(N)




dimensions in mm

CK IA(N)

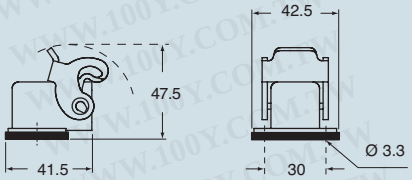

CK IAP(N)S and **MK IAP(N)**

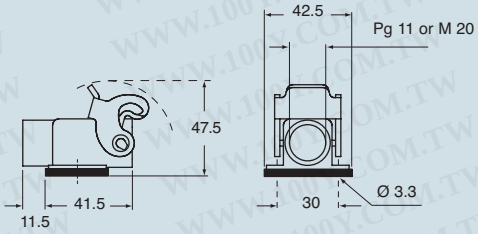

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

inserts: page

CK	3	poles + ⏚	36
CK	4	poles + ⏚	36
CKS	3	poles + ⏚	37
CKS	4	poles + ⏚	37
CD	7	poles + ⏚	39
CD	8	poles	40
CQ	5	poles + ⏚	63
CQ	12	poles + ⏚	62

overall dimensions:
21 x 21 mm

hoods




covers



description	part No. (entry - Pg 11)	part No. (entry - M 20)	part No.
with pegs, top entry [1]	**CK 03 VS** (white)	**MK V20** (white)	
with pegs, top entry [1]	**CK 03 VNS** (black)	**MK VN20** (black)	
with pegs, side entry [1]	**CK 03 VAS** (white)	**MK VA20** (white)	
with pegs, side entry [1]	**CK 03 VANS** (black)	**MK VAN20** (black)	
with lever, top entry [1]	**CK 03 VGS** (white)	**MK VG20** (white)	
with lever, top entry [1]	**CK 03 VGNS** (black)	**MK VGN20** (black)	
with pegs and gasket, for female inserts			**CK 03 C** (white)
with pegs and gasket, for female inserts			**CK 03 CN** (black)
with pegs, for male inserts			**CK 03 CA** (white)
with pegs, for male inserts			**CK 03 CAN** (black)
with lever and gasket, for female inserts			**CK 03 CX** (white)
with lever and gasket, for female inserts			**CK 03 CXN** (black)
with lever, for male inserts			**CK 03 CXA** (white)
with lever, for male inserts			**CK 03 CXAN** (black)
seal and screw kit for IP66/IP67 [2] for CK, CQ 05, CKS inserts	**CKR 65**		
seal and screw kit for IP66/IP67 [2] for CD 07/08 inserts	**CKR 65 D**		

1) enclosures with IP44 degree of protection, obtained by the elimination of the flexible washer normal supplied with the insert
2) To achieve the IP66/IP67 protection rating, a kit is available which includes a seal to be fitted under the insert fastening screw supplied with the kit (see example illustrated), instead of the screw with spring washer supplied with the insert

Note:
The CQ 12 inserts are already fitted with seal and screw, allowing IP66/IP67 protection rating to be achieved.




Type 12
Type 4/4X only
with CKR 65 (D)


dimensions indicated are not binding and may be changed without notice

dimensions in mm


CK V(N)S and **MK V(N)**

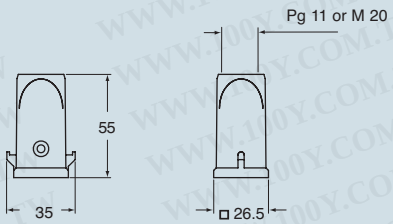

CK VA(N)S and **MK VA(N)**

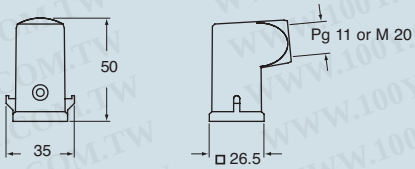


CK VG(N)S and **MK VG(N)**




dimensions in mm


CK C(N)




CK CA(N)



CK CX(N)



CK CXA(N)



inserts: page

CK	3	poles + ⏚	36
CK	4	poles + ⏚	36
CKS	3	poles + ⏚	37
CKS	4	poles + ⏚	37
CD	8	poles	40
CQ	5	poles + ⏚	63
CQ	12	poles + ⏚	62

overall dimensions:
21 x 21 mm

bulkhead housings




angled bulkhead housings




description	part No.	part No. (entry - Pg 11)	part No. (entry - M 20)
with lever in galvanised steel [1] with stainless steel lever [1]	**CKA 03 I** **CKAX 03 I**		
without cable gland outlet, lever in galvanised steel [1] without cable gland outlet, stainless steel lever [1]		**CKA 03 IA** **CKAX 03 IA**	
with threaded entry, lever in galvanised steel[1] with threaded entry, stainless steel lever [1] with threaded entry, lever in galvanised steel[1], bottom closed with threaded entry, stainless steel lever [1], bottom closed		**CKA 03 IAPS** **CKAX 03 IAPS** **CKA 03 APS** **CKAX 03 APS**	**MKA IAP20** **MKAX IAP20** **MKA AP20** **MKAX AP20**
seal and screw kit for IP66/IP67 [2] for CK, CQ 05, CKS inserts	**CKR 65**	**CKR 65**	
seal and screw kit for IP66/IP67 [2] for CD 07/08 inserts	**CKR 65 D**	**CKR 65 D**	

panel cut-out for enclosures, in mm



1) enclosures with IP44 degree of protection.
2) To achieve the IP66/IP67 protection rating, a kit is available which includes a seal to be fitted under the insert fastening screw supplied with the kit (see example illustrated), instead of the screw with spring washer supplied with the insert

Note:
The CQ 12 inserts are already fitted with seal and screw, allowing IP66/IP67 protection rating to be achieved.




Type 12
Type 4/4X only
with CKR 65 (D)


dimensions indicated are not binding
and may be changed without notice

dimensions in mm

CKA I




CKAX I




dimensions in mm


CKA IA

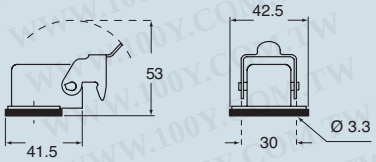


CKAX IA

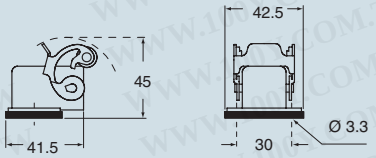

CKA IAPS (CKA APS) and **MKA IAP (MKA AP)**

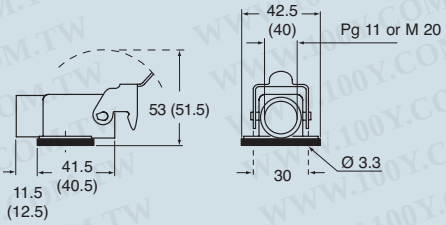

CKAX IAPS (CKAX APS) and **MKAX IAP (MKAX AP)**

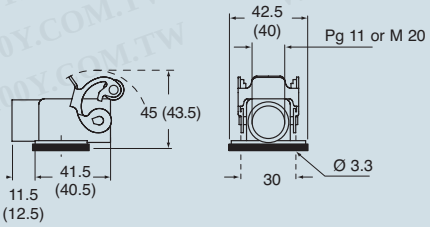

inserts: page

CK	3	poles + ⏚	36
CK	4	poles + ⏚	36
CKS	3	poles + ⏚	37
CKS	4	poles + ⏚	37
CD	8	poles	40
CQ	5	poles + ⏚	63
CQ	12	poles + ⏚	62

overall dimensions:
21 x 21 mm

hoods




covers



description	part No. (entry - Pg 11)	part No. (entry - M 20)	part No.
with pegs, top entry [1] with pegs, side entry [1]	**CKA 03 VS** **CKA 03 VAS**	**MKA V20** **MKA VA20**	
with lever in galvanised steel, top entry [1] with stainless steel lever, top entry [1]	**CKA 03 VGS** **CKAX 03 VGS**	**MKA VG20** **MKAX VG20**	
with pegs and gasket, for female inserts with pegs, for male inserts			**CKA 03 C** [2] **CKA 03 CA** [2]
with stainless steel lever and gasket, for female inserts with stainless steel lever, for male inserts			**CKAX 03 CX** **CKAX 03 CXA**
seal and screw kit for IP66/IP67 [3] for CK, CQ 05, CKS inserts	**CKR 65**		
seal and screw kit for IP66/IP67 [3] for CD 08 inserts	**CKR 65 D**		


1) enclosures with IP44 degree of protection.
2) better to use with CKAX enclosures (stainless steel lever).
3) To achieve the IP66/PI67 protection rating, a kit is available which includes a seal to be fitted under the insert fastening screw supplied with the kit (see example illustrated), instead of the screw with spring washer supplied with the insert

Note:
The CQ 12 inserts are already fitted with seal and screw, allowing IP66/IP67 protection rating to be achieved.




dimensions in mm


CKA VS and **MKA V**

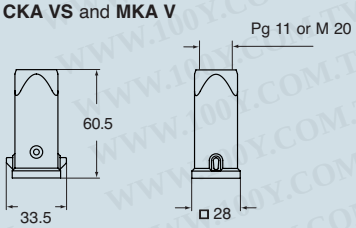


CKA VAS and **MKA VA**

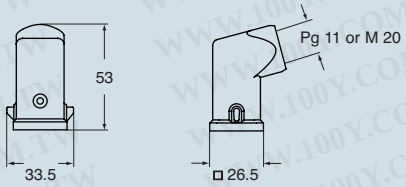

CKA VGS and **MKA VG**




CKAX VGS and **MKAX VG**




dimensions in mm


CKA C




CKA CA



CKAX CX



CKAX CXA



cULus Type 12
Type 4/4X only
with CKR 65 (D)

dimensions indicated are not binding
and may be changed without notice

inserts: page

CK	3 poles + ⏚	36
CK	4 poles + ⏚	36
CKS	3 poles + ⏚	37
CKS	4 poles + ⏚	37
CD	8 poles	40
CQ	5 poles + ⏚	63
CQ	12 poles + ⏚	62

overall dimensions:
21 x 21 mm

bulkhead housings straight and angled




hoods




description	part No. (entry - Pg 11)	part No. (entry - M 20)	part No. (entry - Pg 11)	part No. (entry - M 20)
with stainless steel lever [1]	**CKAXW 03 I**			
without cable gland outlet, stainless steel lever [1]	**CKAXW 03 IA**			
with threaded entry, stainless steel lever [1]	**CKAXW 03 IAP**	**MKAXW IAP20**		
with threaded entry, stainless steel lever [1], bottom closed	**CKAXW 03 AP**	**MKAXW AP20**		
with pegs, top entry [1]			**CKAW 03 V**	**MKAW V20**
with pegs, side entry [1]			**CKAW 03 VA**	**MKAW VA20**
with stainless steel lever, top entry [1]			**CKAXW 03 VG**	**MKAXW VG20**
seal and screw kit for IP66/IP67 [2] for CK, CQ 05, CKS inserts	**CKR 65**		**CKR 65**	
seal and screw kit for IP66/IP67 [2] for CD 08 inserts	**CKR 65 D**		**CKR 65 D**	

panel cut-out for enclosures, in mm



1) enclosures with IP44 degree of protection.
2) To achieve the IP66/IP67 protection rating, a kit is available which includes a seal to be fitted under the insert fastening screw supplied with the kit (see example illustrated), instead of the screw with spring washer supplied with the insert

Note:
The CQ 12 inserts are already fitted with seal and screw, allowing IP66/IP67 protection rating to be achieved.




Type 12
Type 4/4X only
with CKR 65 (D)


dimensions indicated are not binding and may be changed without notice

dimensions in mm


CKAXW I



CKAXW IA

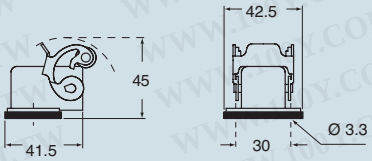


CKAXW IAP (CKAXW AP) and **MKAXW IAP (MKAXW AP)**

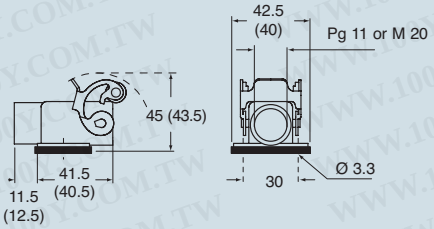


dimensions in mm


CKAW V and **MKAW V**

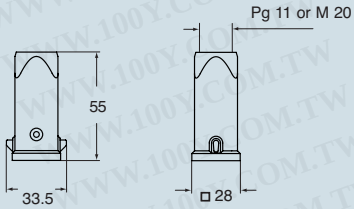

CKAW VA and **MKAW VA**

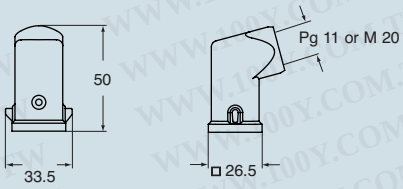

CKAXW VG and **MKAXW VG**



inserts: page

CK	3 poles + ⏚	36
CK	4 poles + ⏚	36
CKS	3 poles + ⏚	37
CKS	4 poles + ⏚	37
CD	8 poles	40
CQ	5 poles + ⏚	63
CQ	12 poles + ⏚	62

overall dimensions:
21 x 21 mm

bulkhead housings straight and angled




hoods




description	part No. (entry - Pg 11)	part No. (entry - M 20)	part No. (entry - Pg 11)	part No. (entry - M 20)
with stainless steel lever [1]	**CKAXS 03 I**			
without cable gland outlet, stainless steel lever [1]	**CKAXS 03 IA**			
with threaded entry, stainless steel lever [1]	**CKAXS 03 IAP**	**MKAXS IAP20**		
with threaded entry, stainless steel lever [1], bottom closed	**CKAXS 03 AP**	**MKAXS AP20**		
with pegs, top entry [1]			**CKAS 03 V**	**MKAS V20**
with pegs, side entry [1]			**CKAS 03 VA**	**MKAS VA20**
with stainless steel lever, top entry [1]			**CKAXS 03 VG**	**MKAXS VG20**
seal and screw kit for IP66/IP67 [2] for CK, CQ 05, CKS inserts	**CKR 65**		**CKR 65**	
seal and screw kit for IP66/IP67 [2] for CD 08 inserts	**CKR 65 D**		**CKR 65 D**	

panel cut-out for enclosures, in mm



1) enclosures with IP44 degree of protection.
2) To achieve the IP66/IP67 protection rating, a kit is available which includes a seal to be fitted under the insert fastening screw supplied with the kit (see example illustrated), instead of the screw with spring washer supplied with the insert

Note:
The CQ 12 inserts are already fitted with seal and screw, allowing IP66/IP67 protection rating to be achieved.




Type 12
Type 4/4X only
with CKR 65 (D)


dimensions indicated are not binding and may be changed without notice

dimensions in mm


CKAXS I



CKAXS IA

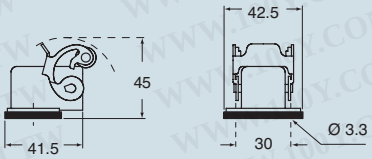


CKAXS IAP (CKAXS AP) and **MKAXS IAP (MKAXS AP)**

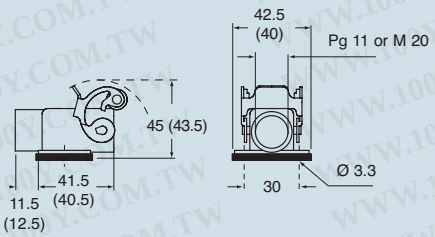


dimensions in mm


CKAS V and **MKAS V**

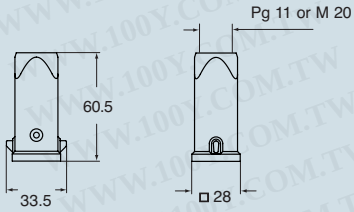

CKAS VA and **MKAS VA**

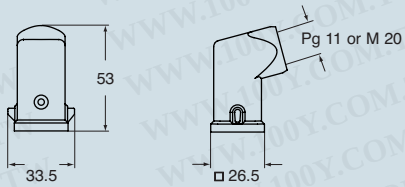

CKAXS VG and **MKAXS VG**



勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw