


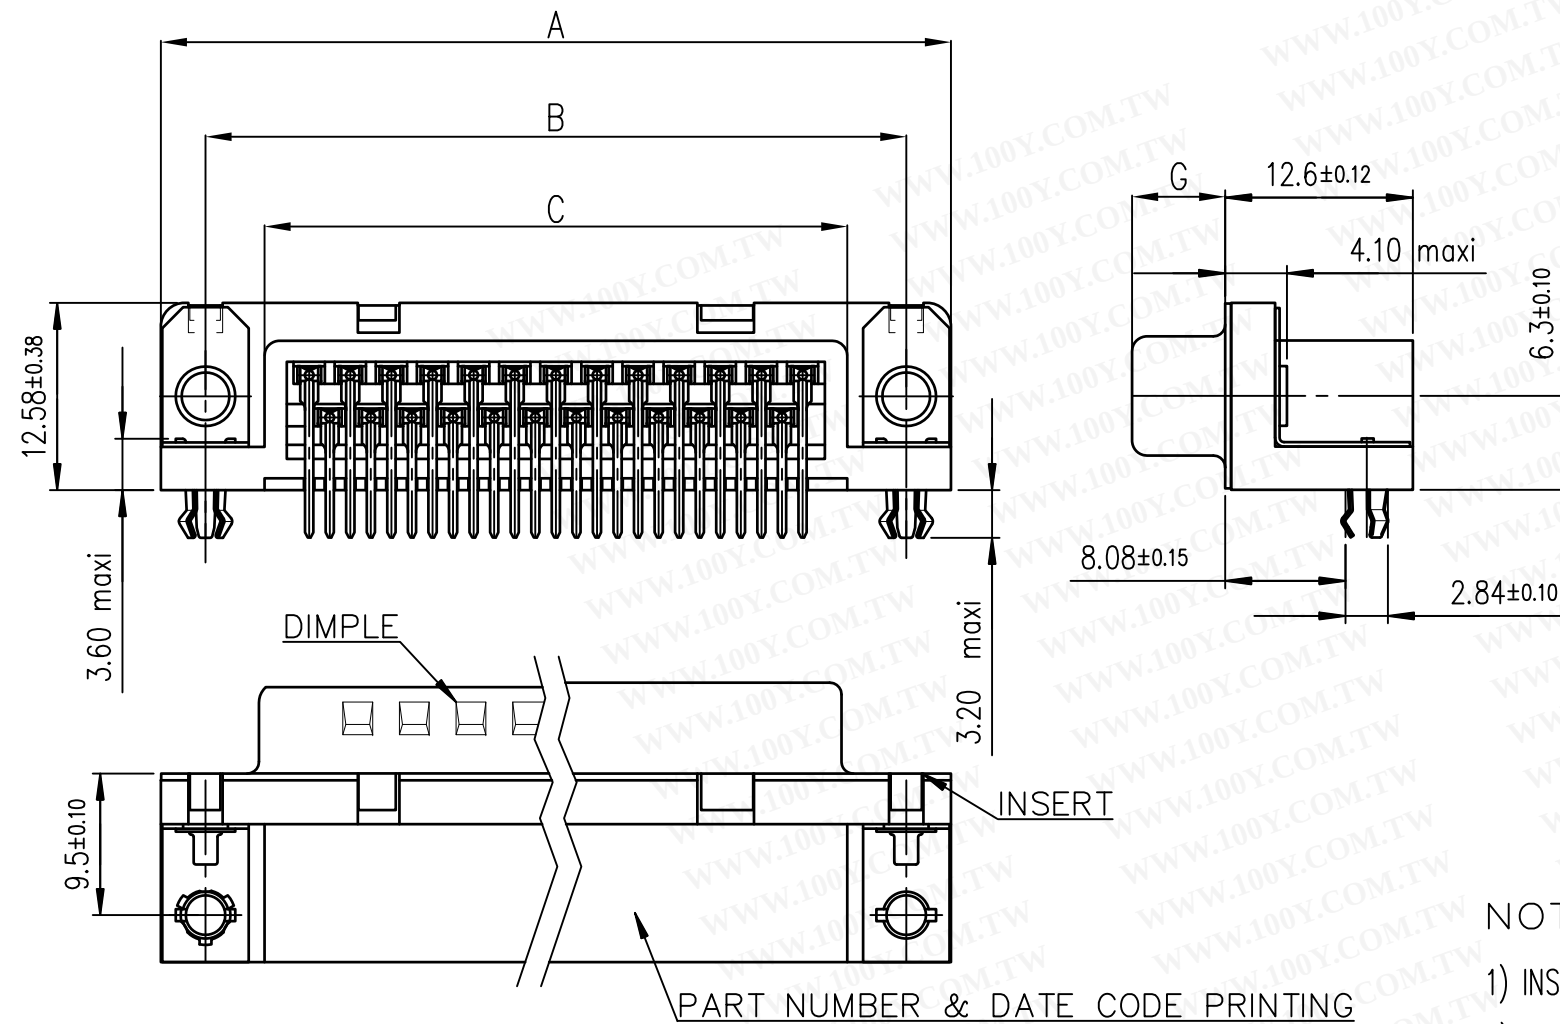


ORDERING INFORMATION

SERIES	LD 09 S 33E 4 GX 00 LF	LEAD FREE
NO. OF CONTACTS	09,15,25,37	STANDARD VERSION
CONTACTS	P - PIN S - SOCKET	MOUNTING ACCESSORY
TERMINATION TYPE	33E-RIGHT ANGLED(US VERSION) FOOTPRINT-8.08mm & PITCH-2.84mm	GX-HARPOONS+INSERT UNC 4-40+ELEC.CONTINUITY GL-HARPOONS+INSERT M3+ELEC.CONTINUITY GV-HARPOONS+FEMALE SCREW UNC 4-40+ELEC.CONTINUITY GI-HARPOONS+FEMALE SCREW M3+ELEC.CONTINUITY
		MATING CYCLES
		*FOR LD SERIES, REFER TECHNICAL SPECIFICATION

SHELL		A±0.38	B±0.12	C±0.10	D±0.25	E±0.07	F	G
09	P	30.81	24.99	16.96	16.79	10.96	8.35±0.12	5.90±0.15
	S	30.81	24.99	16.96	16.21	10.96	7.89±0.13	6.17±0.12
15	P	39.14	33.32	25.18	25.12	19.18	8.35±0.12	5.90±0.15
	S	39.14	33.32	25.18	24.54	19.18	7.89±0.13	6.17±0.12
25	P	53.03	47.04	39.12	38.84	33.12	8.35±0.12	5.70±0.25
	S	53.03	47.04	39.12	38.25	33.12	7.89±0.13	6.17±0.12
37	P	69.32	63.50	55.68	55.30	49.68	8.35±0.12	5.70±0.25
	S	69.32	63.50	55.68	54.71	49.68	7.89±0.13	6.17±0.12

NOTES:

- 1) INSIDE DIMENSIONS FOR THE MALE CONNECTOR AND OUTSIDE DIMENSIONS FOR THE FEMALE CONNECTOR
- 2) DIMPLE IS PROVIDED ONLY FOR THE MALE CONNECTOR
- 3) THE GENERAL VIEW IS FOR THE OPTION GX/GL

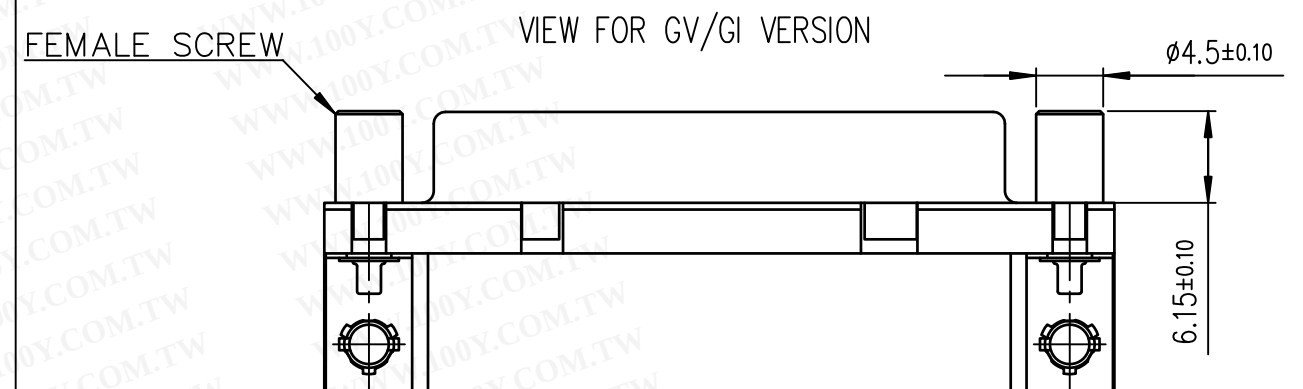

mat'l. code	surface	tolerance	projection	product family
-	ISO 1302	ISO 406 ISO 1101	MM	D-SUB
ltr	ecn no	dr	date	title
A	-	AB	2014-08-01	DELTA-D R/A US
B	ELX-I-19184	AB	2014-10-24	LD SERIES
				dwg no
				10130914
				sheet 1 of 2
				size
				A3
				type
				Product Customer Drawing
sheet index	revision	B	B	
	sheet	1	2	

TECHNICAL SPECIFICATION

PHYSICAL CHARACTERISTICS

INSULATOR MATERIAL : BLACK THERMOPLASTIC UL94 V0
CONTACTS MATERIAL : COPPER ALLOY
CONTACTS PLATING : GOLD FLASH OVER NICKEL
SHELL PLATING : NICKEL/TIN

ELECTRICAL CHARACTERISTICS

RATED VOLTAGE : 250V
RATED CURRENT : 5 A
CONTACT RESISTANCE : $\leq 25m\Omega$
INSULATION RESISTANCE : $\geq 5000 M\Omega$

MECHANICAL CHARACTERISTICS

MATING CYCLES : 50 MINIMUM
RETENTION AGAINST TORQUE : 0.5Nm


ENVIRONMENTAL CHARACTERISTICS

OPERATING TEMPERATURE : -55°C TO +105°C


PACKING SPECIFICATION

REFER GS-14-2405


MATING VIEW FOR FEMALE CONNECTOR

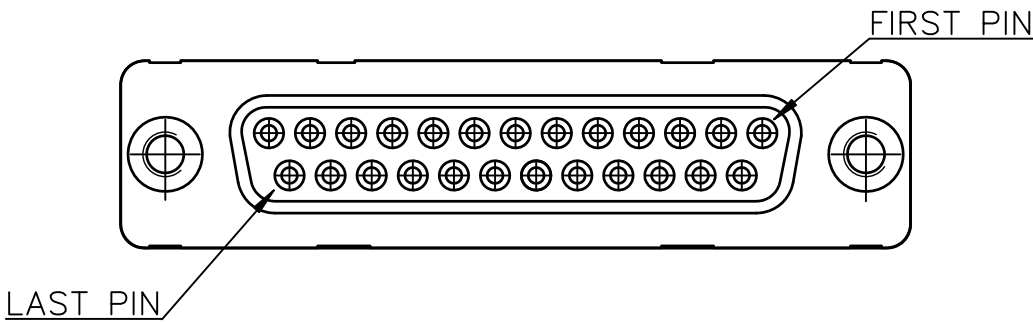


MATING VIEW FOR MALE CONNECTOR

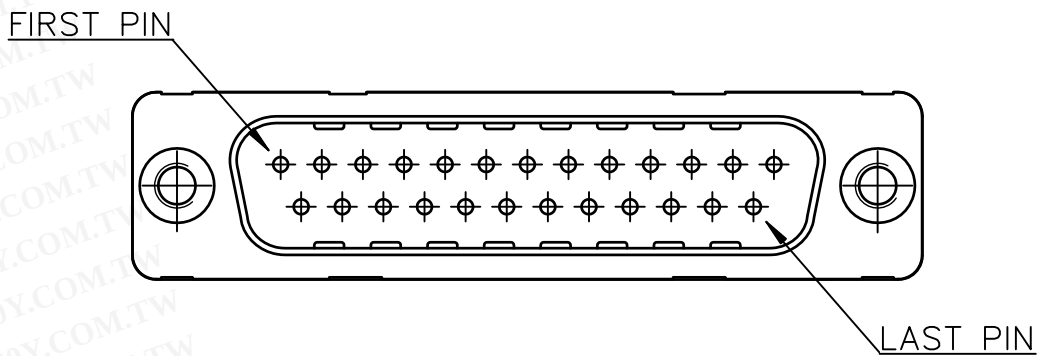

PC card drilling dimensions(after plating)
(thickness 1.60±0.20mm)

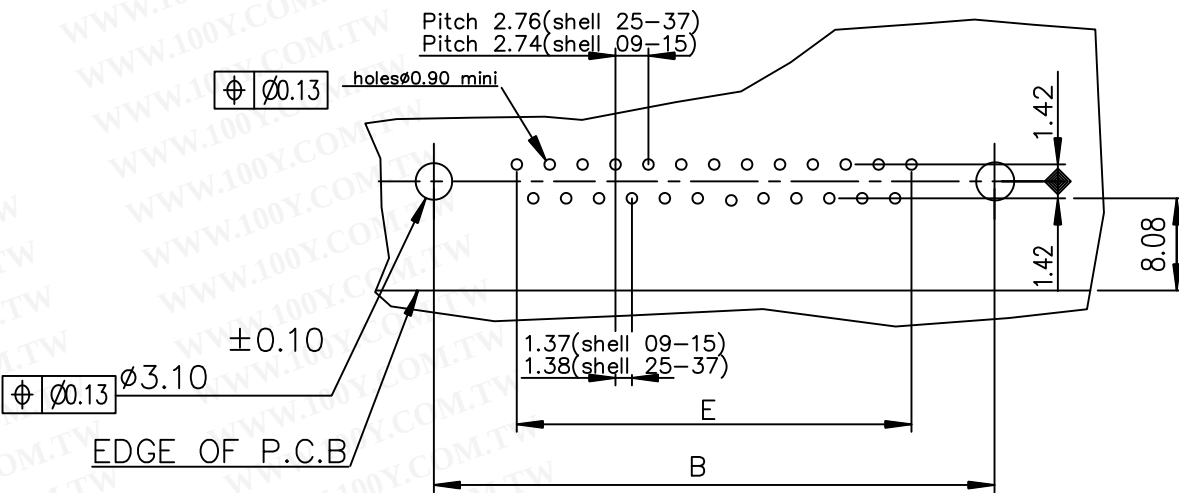

mat'l. code —				surface ISO 1302 ✓		tolerance ISO 406 ISO 1101		projection 		product family D—SUB									
ltr	ecn no	dr	date	tolerances unless otherwise specified					title DELTA—D R/A US LD SERIES										
B				angles	linear	.0±0.1													
			.00±0.1																
			.000±0.1																
				0°±2°				scale 2:1											
				dr	ALIAS BABU		2014—08—01			dwg no				sheet 2 of 2				size	
				engr	ALIAS BABU		2014—10—24			10130914				A3					
				chr	MITHUN PAUL		2014—10—24												
				appd	BIJU K PAUL		2014—10—24												
sheet index		revision sheet																	

Mouser Electronics

Authorized Distributor

Click to View Pricing, Inventory, Delivery & Lifecycle Information:

[FCI / Amphenol:](#)

LD25P33E4GV00LF	LD09S33E4GX00LF	LD15S33E4GV00LF	LD09P33E4GX00LF	LD25S33E4GV00LF
LD09P33E4GV00LF	LD09S33E4GV00LF	LD25S33E4GX00LF	LD15P33E4GV00LF	LD37P33E4GV00LF
LD15P33E4GX00LF	LD37S33E4GX00LF	LD25P33E4GX00LF	LD15S33E4GX00LF	LD37P33E4GX00LF
LD37S33E4GV00LF				