


LW-S6A2G

金手指插座 焊線式 SOLT 2*6

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

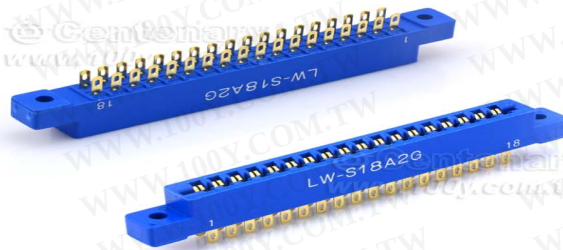

產品說明

Electrical Characteristics:

Current Rating: 3 AMP

Contact Resistance: Less than 10mΩ

Contact Material: Phosphor bronze

Housing Material: Blue or Black glass fiber polyester classification of UL 94V-0

Insulation Resistance: More than 1000MΩ at 500V DC

Operation Temperature: -55℃ to +105℃

Operating Relative Humidity: 5 to 95% R.H

Accepts Double P.C.BOARD FROM 1.37mm to 1.9mm