


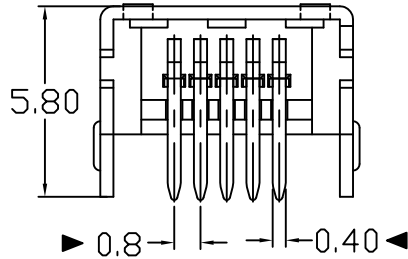
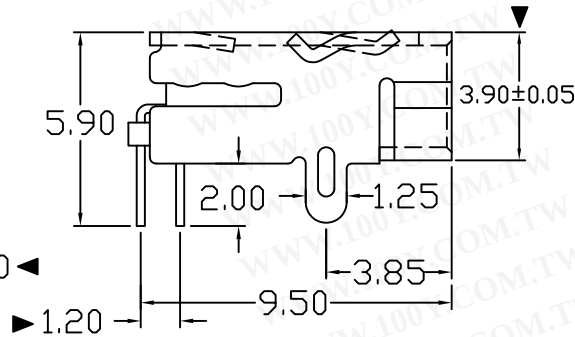


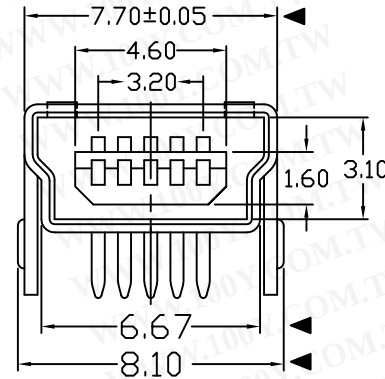


RoHS
Compliant
2002/95/EC

REV.	ECN.	NO.	APPD.

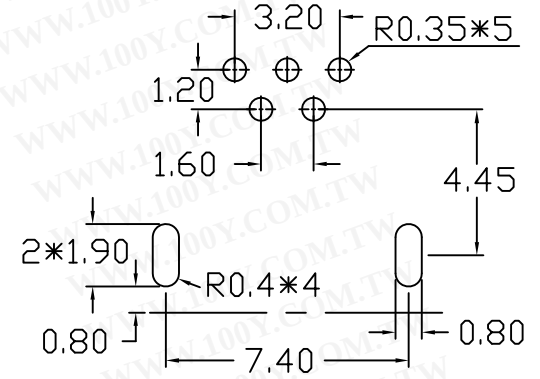

RECOMMENDED PCB LAYOUT



MNOTES:

- ELECTRICAL CHARACTERISTIC:
 - VOLTAGE CURRENT RATING: 1AMP,30V DC;
 - INSULATION RESISTANCE: 100MΩ MIN;
 - CONTACT RESISTANCE: 50mΩ MAX;
 - WITHSTANDING VOLTAGE: 300V AC;
- Mechanical:
 - Mating Force: 35N MAX
 - Unmating Force: 10N MIN.
- DIMENSIONS MARKED "▼" TO BE CHECKED BY Q.C & IPQC.

4.PART,NO

MUBF-05*N-4BR82

1:1U"
6:30U"

W:WHITE
B:BLACK
1:PBT
2:PA6T
3:PA9T
4:LCP

Bill of materials:

3	HOUSING	LCP , BLACK, UL94 V-0	1	UL 94V-0	X. ±0.3	X.* ±2°	UNITS mm	<div>胜特力电子(深圳) 86-755-83298787 Http://www.100y.com.tw</div>					
					.X ±0.2	.X.* ±1°							MAT'L
2	SHELL	COPPER ALLOY, C2680	1	PLATED Ni	.XX ±0.15	.XX*	SEE NOTE	TITLE: MINI USB 5P/F 90° B型两脚	PART NO.: MUBF-05*N-4BR82				
					.XXX ±0.10	.XXX*							FINISH
1	TERMINAL	COPPER ALLOY, C5191	5	GOLD/TIN PLATED	THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF ACCURATE INNOTECH INC AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF ACCURATE INNOTECH INC		SEE NOTE	DR: <i>Sandy</i> 2009/8/17	DWG NO.: AII-R82				
													Q'TY
NO	PARTS	MATERIAL	QTY	FINISHING				APPD:	SCALE		SHEET	REV.	ENGINEERING
									1:1		1/1	A	DRAWING
1		2		3		4		5		6		7	