



勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

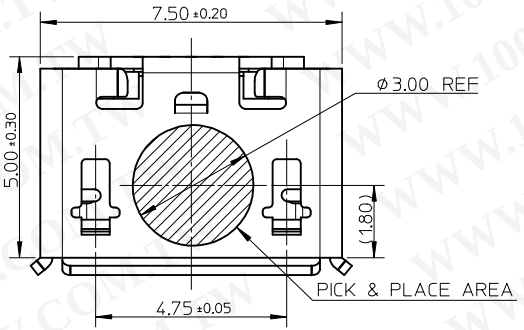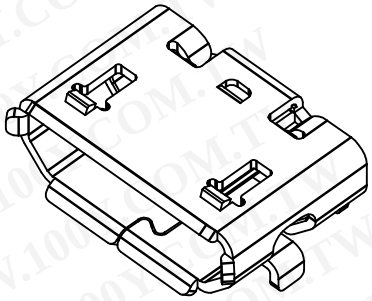


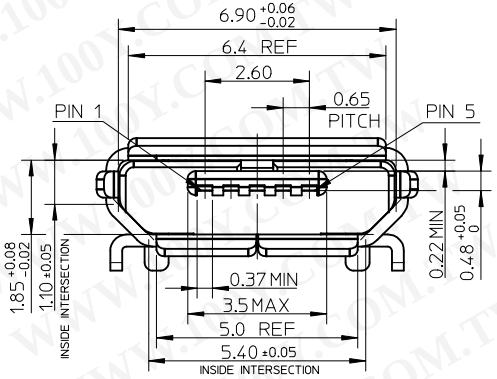



NOTES:
1. MATERIAL:
   HOUSING: LCP, BLACK, UL94V-0;
   TERMINAL: COPPER ALLOY, THICKNESS: 0.15mm;
   SHELL: STAINLESS STEEL, THICKNESS: 0.30mm.
2. PLATING:
   TERMINAL: CONTACT AREA: GOLD FLASH OVER MINIMUM 0.75MICRON Pd/Ni.
   SOLDER TAIL AREA: GOLD FLASH.
   UNDER PLATING: NICKEL 2.0 MICRON MINIMUM.
   SHELL: MATTE TIN 2.0 MICRON
   UNDER PLATING: NICKEL 1.27 MICRON MINIMUM.
3. TAIL & NAIL COPLANARITY 0.08mm MAXIMUM.
4. PRODUCT SPECIFICATION: PS-105017-001.
5. PACKAGING SPECIFICATION: PK-105017-001.
6. COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV DIRECTIVE 2000/53/EC.





RECOMMENDED P.C.B. PATTERN LAYOUT
GENERAL TOLERANCE: ±0.05

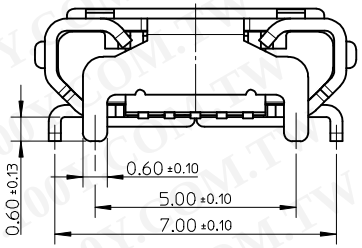

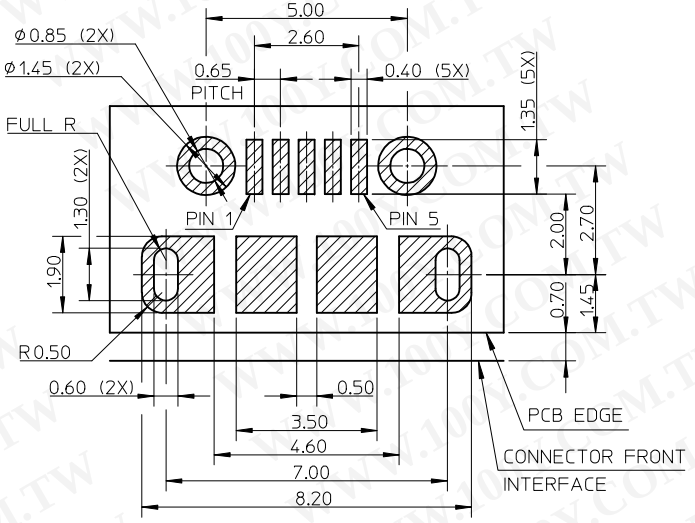
| REVISED | | | REV |
|---|---|---|---|
| EC NO: SH2013-0168 | 2012/12/04 | | T |
| DRWN:XQZHANG | 2012/12/04 | | |
| CH'KD:XQZHANG | 2012/12/10 | | |
| APPR:AYIN | | DESCRIPTION | |

QUALITY SYMBOLS
FA=0
FC=0
FP=0

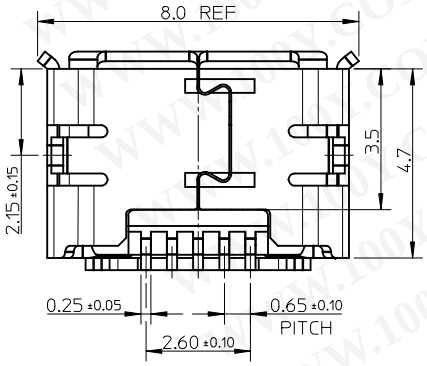GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|---|---|---|
| 4 PLACES | ± --- | ± --- |
| 3 PLACES | ± --- | ± --- |
| 2 PLACES | ± 0.25 | ± --- |
| 1 PLACE | ± 0.25 | ± --- |
| 0 PLACE | ± --- | ± --- |

ANGULAR ± 3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

| DIMENSION STYLE | SCALE | DESIGN UNITS | |
|---|---|---|---|
| MM ONLY | 1:1 | METRIC | THIRD ANGLE PROJECTION |

| DRAWN BY | DATE |
|---|---|
| XJSONG | 2008/01/23 |
| CHECKED BY | DATE |
| JTIAN | 2008/01/23 |
| APPROVED BY | DATE |
| HWWANG | 2008/01/23 |


TITLE: MICRO USB BOTTOM MOUNT RECEPTACLE, B TYPE


molex

| MATERIAL NO. | DOCUMENT NO. | SHEET NO. |
|---|---|---|
| 105017-0001 | SD-105017-001 | 1 OF 2 |

SIZE A3


THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION

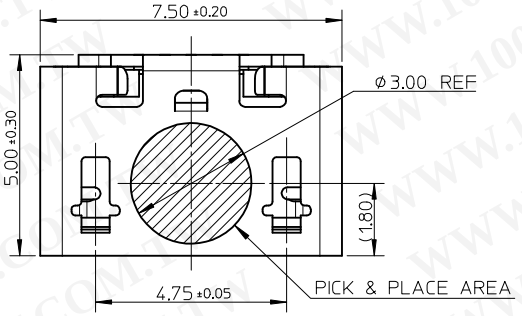


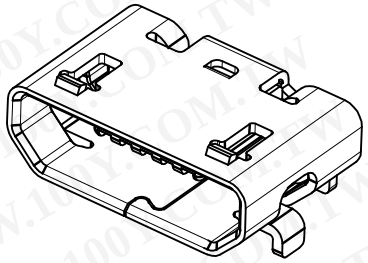



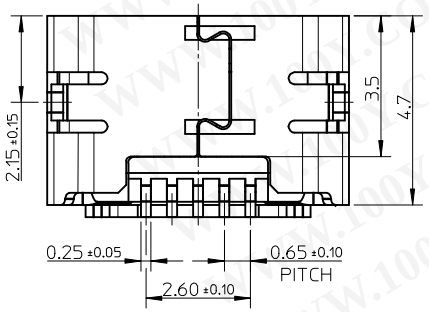
NOTES:

1. MATERIAL:
   HOUSING: LCP, BLACK, UL94V-0;
   TERMINAL: COPPER ALLOY, THICKNESS: 0.15mm;
   SHELL: STAINLESS STEEL, THICKNESS: 0.30mm.
2. PLATING:
   TERMINAL: CONTACT AREA: GOLD FLASH OVER MINIMUM 0.75MICRON Pd/Ni.
   SOLDER TAIL AREA: GOLD FLASH.
   UNDER PLATING: NICKEL 2.0 MICRON MINIMUM.
   SHELL: MATTE TIN 3.8 MICRON
   UNDER PLATING: NICKEL 1.27 MICRON MINIMUM.
3. TAIL & NAIL COPLANARITY 0.08mm MAXIMUM.
4. PRODUCT SPECIFICATION: PS-105017-001.
5. PACKAGING SPECIFICATION: PK-105017-001.
6. COMPLIANT TO RoHS DIRECTIVE 2002/95/EC AND ELV DIRECTIVE 2000/53/EC.

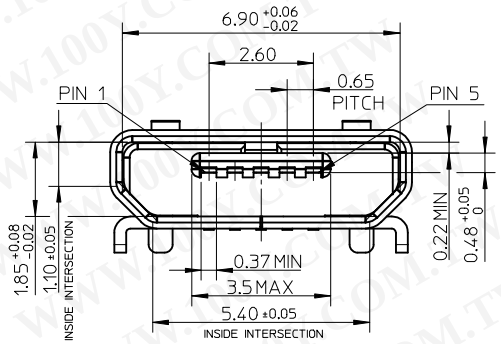


SEE SHEET 1
EC NO: SH2013-0168 2012/12/04
DRWN:XQZHANG 2012/12/04
CH'KD:XQZHANG 2012/12/10
APPR:AYIN
DESCRIPTION
REV

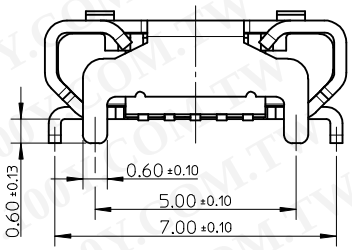QUALITY SYMBOLS
FA=0
FC=0
FP=0

GENERAL TOLERANCES (UNLESS SPECIFIED)

| | mm | INCH |
|---|---|---|
| 4 PLACES | ± --- | ± --- |
| 3 PLACES | ± --- | ± --- |
| 2 PLACES | ± 0.25 | ± --- |
| 1 PLACE | ± 0.25 | ± --- |
| 0 PLACE | ± --- | ± --- |

ANGULAR ± 3 °

DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS

DIMENSION STYLE: MM ONLY
SCALE: 1:1
DESIGN UNITS: METRIC
THIRD ANGLE PROJECTION

| | | DATE |
|---|---|---|
| DRAWN BY | XJSONG | 2008/01/23 |
| CHECKED BY | JTIAN | 2008/01/23 |
| APPROVED BY | HWWANG | 2008/01/23 |

TITLE: MICRO USB BOTTOM MOUNT RECEPTACLE, B TYPE
FLANGELESS TYPE

molex

MATERIAL NO.: 105017-1001
DOCUMENT NO.: SD-105017-001
SHEET NO.: 2 OF 2
SIZE: A3

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION