
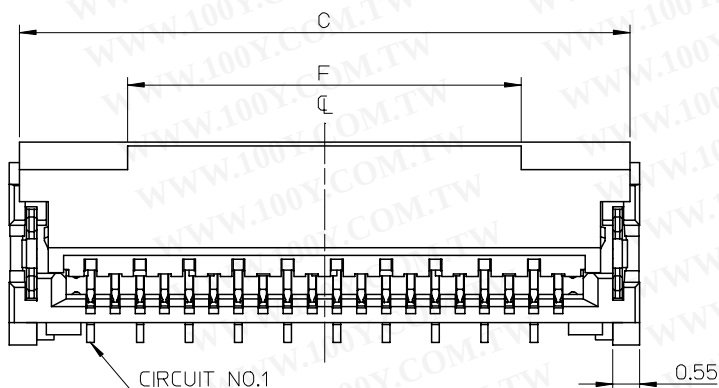
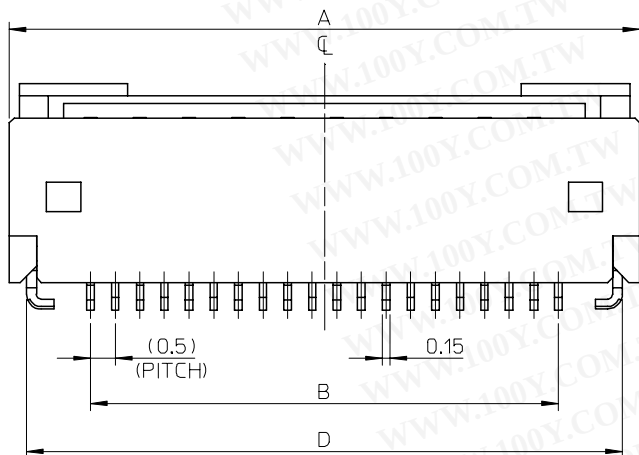
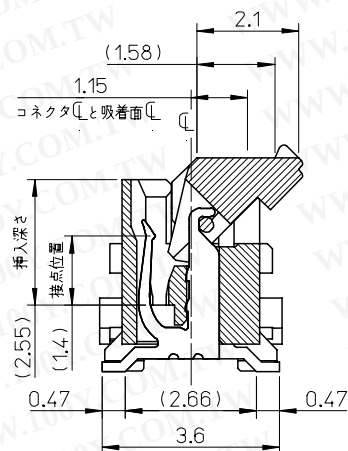


10 9 8 7 6 5 4 3 2 1

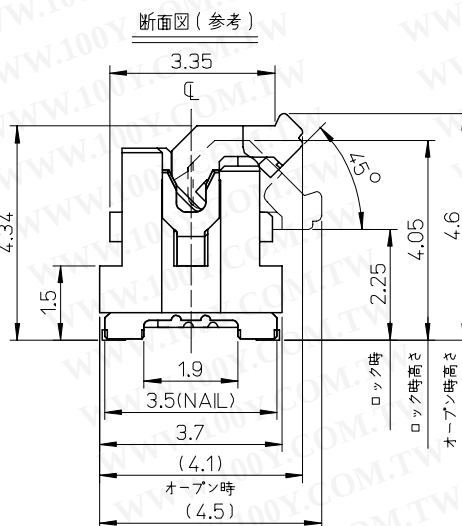

注記 NOTES ~~~~~

1. 材質

MATERIAL

ハウジング: LCP (液晶ポリマー), ガラス充填, 白色, UL94V-0
HOUSING: LCP (LIQUID CRYSTAL POLYMER),
GLASS FILLED, WHITE, UL94V-0
アクチュエータ: ポリアミド 9T, ガラス充填, 茶色, UL94V-0
ACTUATOR: POLYAMIDE 9T,
GLASS FILLED, BROWN, UL94V-0
ターミナル: 銅合金 (t=0.15)
TERMINAL: COPPER ALLOY (t=0.15)
金具: 銅合金 (t=0.2)
NAIL: COPPER ALLOY (t=0.2)

2. メッキ仕様

PLATING

ターミナル

TERMINAL

銅ビスマスメッキ

TIN BISMUTH PLATING

下地メッキ: ニッケルメッキ

UNDER PLATING: NICKEL PLATING

金具

NAIL

銅メッキ

TIN PLATING

下地メッキ: ニッケルメッキ

UNDER PLATING: NICKEL PLATING

3. テールと金具を併せた平坦度は、0.1ミリメートル以下。

TAILS AND NAILS COPLANARITY TO BE 0.1 MAXIMUM.


4. ELV及びRoHS適合品

ELV AND ROHS COMPLIANT.

8	30.7	32.1	32.4	29.5	32.8	501951-6009	60
	25.7	27.1	27.4	24.5	27.8	501951-5009	50
	23.2	24.6	24.9	22	25.3	501951-4509	45
	20.7	22.1	22.4	19.5	22.8	501951-4009	40
	16.7	18.1	18.4	15.5	18.8	501951-3209	32
	15.7	17.1	17.4	14.5	17.8	501951-3009	30
	12.7	14.1	14.4	11.5	14.8	501951-2409	24
	F	E	D	C	B	A	MATERIAL NO.
							CIRCUITS

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

REVISED EC NO: J2007-2987 DRWN: TRSUZUKI CHKD: HIRATA APPR: HIRATA	DESCRIPTION	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	± 0.2	DRAWN BY TRSUZUKI	DATE 2005/12/05	TITLE 0.5 FPC CONN. HSG ASSY EASY ON / STRAIGHT (TIN-BISMUTH)				
		10 OVER 30 UNDER	± 0.25	CHECKED BY HIRATA	DATE 2005/12/05					
		30 OVER	± 0.3	APPROVED BY MSASAO	DATE 2005/12/05	MOLEX INCORPORATED				
		ANGULAR ±1 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
	DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-501951-001		1 OF 2			
REV		SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

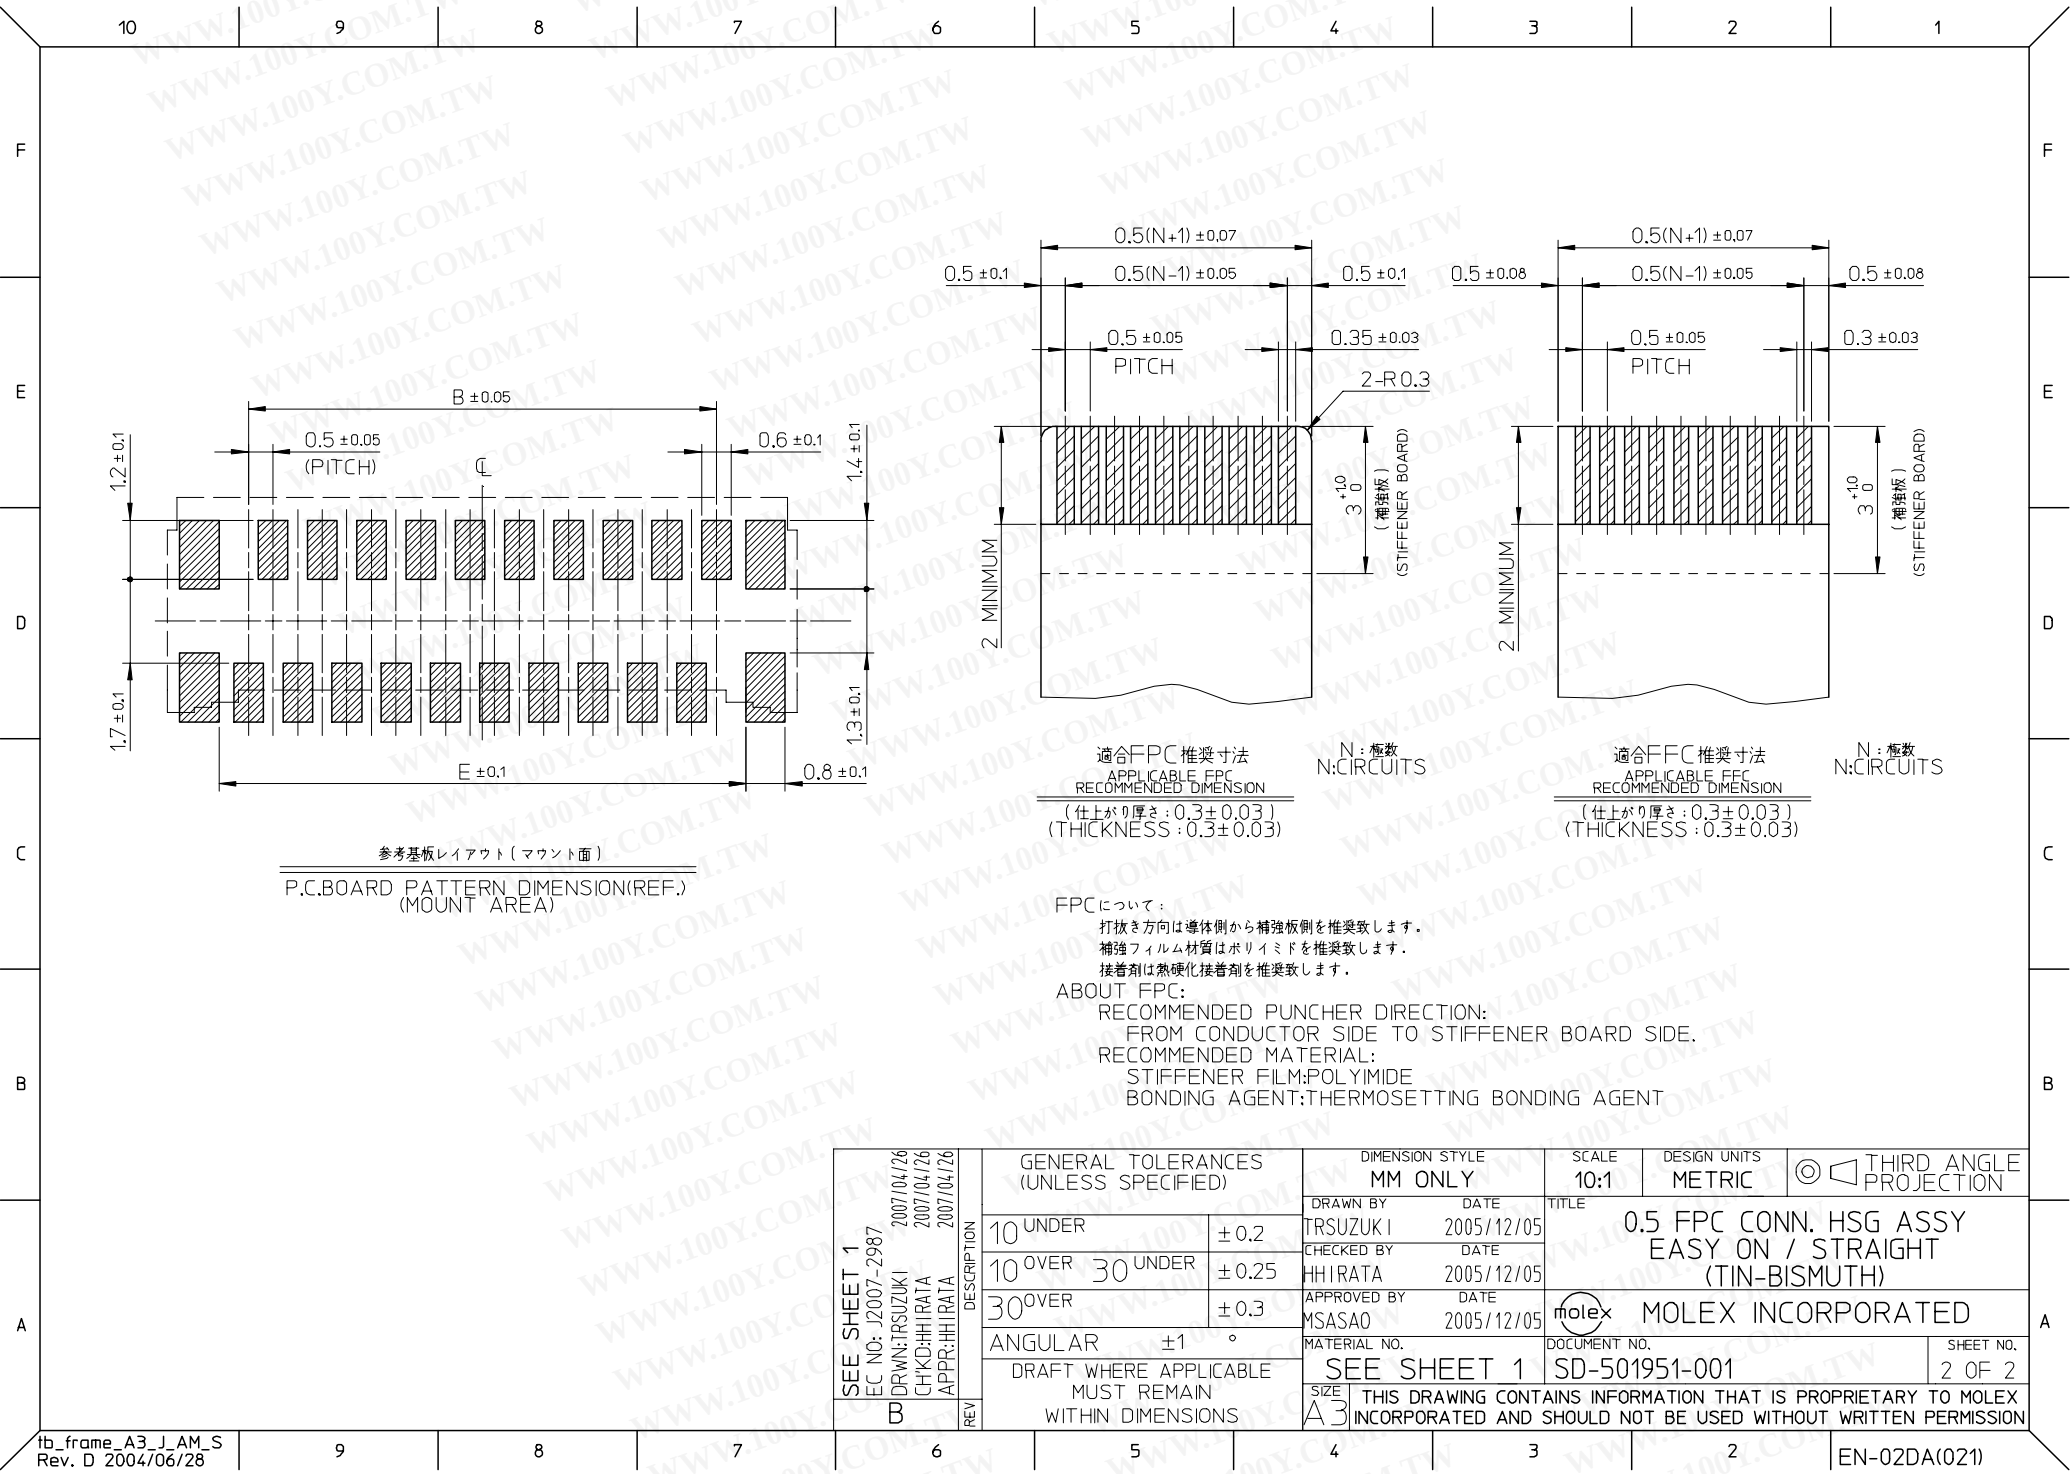

SEE SHEET 1 EC NO: J2007-2987 DRWN: TRSUZUKI CHKD: HIRATA APPR: HIRATA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE 10:1	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY TRSUZUKI	DATE 2005/12/05	TITLE 0.5 FPC CONN. HSG ASSY EASY ON / STRAIGHT (TIN-BISMUTH)				
		10 OVER 30 UNDER	±0.25	CHECKED BY HIRATA	DATE 2005/12/05					
		30 OVER	±0.3	APPROVED BY MSASAO	DATE 2005/12/05	MOLEX MOLEX INCORPORATED				
		ANGULAR ±1 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 1		SD-501951-001		2 OF 2		
	B	REV	SIZE A3 THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION							

F

E

D

C

B

A

F



E

D

C

B

A

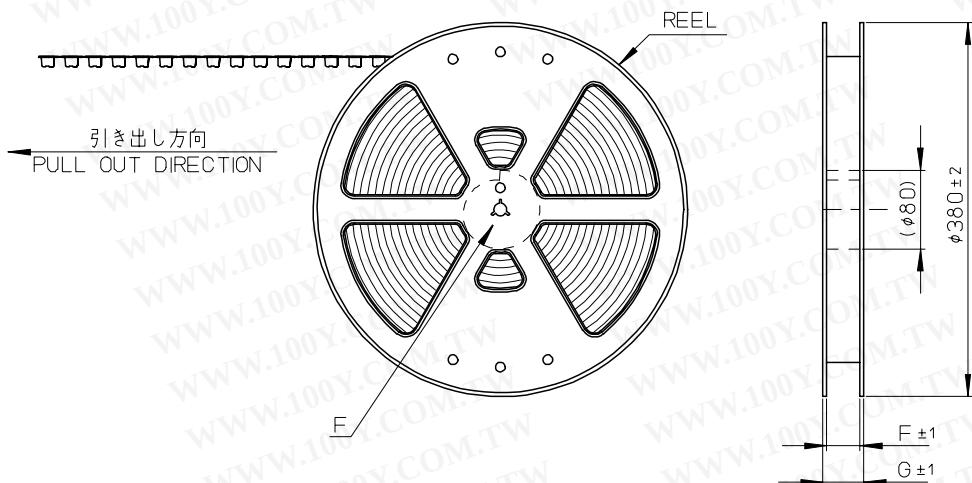


NOTES

1. 製品詳細寸法については SD-501951-001 を参照ください。
RE DETAILED DIMENSION, SEE SD-501951-001

2. 梱包数量：2000 個/リール
NUMBER OF CONNECTORS : 2000 PIECES/REEL


3. リードテープ長さ
LEAD TAPE LENGTH

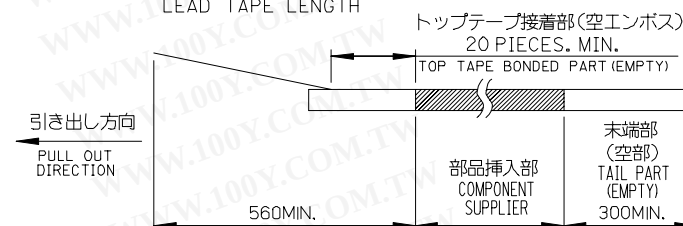

4. 材料
MATERIAL
キャリアテープ：ポリプロピレン (PP)
CARRIER TAPE: POLYPROPYLENE (PP)
トップテープ：PET, PE, REF
TOP TAPE
リール：ポリスチレン (リサイクル材を含む)
REEL : POLYSTYRENE (RECYCLE MATERIAL CONTAINED)

5. ELV及びRoHS適合品
ELV AND RoHS COMPLIANT.

REVISED EC NO.: J2007-2987 DRAWN: TRSUZUKI CHKD: HIRATA APPR: HIRATA	DESCRIPTION 2007/04/26 2007/04/26 2007/04/26	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY TRSUZUKI	DATE 2005/12/05	TITLE 0.5 FPC CONN. HSG ASSY E/O STRAIGHT EMBSTP PKG (TIN-BISMUTH)				
		10 OVER 30 UNDER	±0.25	CHECKED BY HIRATA	DATE 2005/12/05					
		30 OVER	±0.3	APPROVED BY MSASAO	DATE 2005/12/05	MOLEX INCORPORATED				
		ANGULAR ±1 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE SHEET 2		SD-501951-002		1 OF 2		
REV	3	THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION								

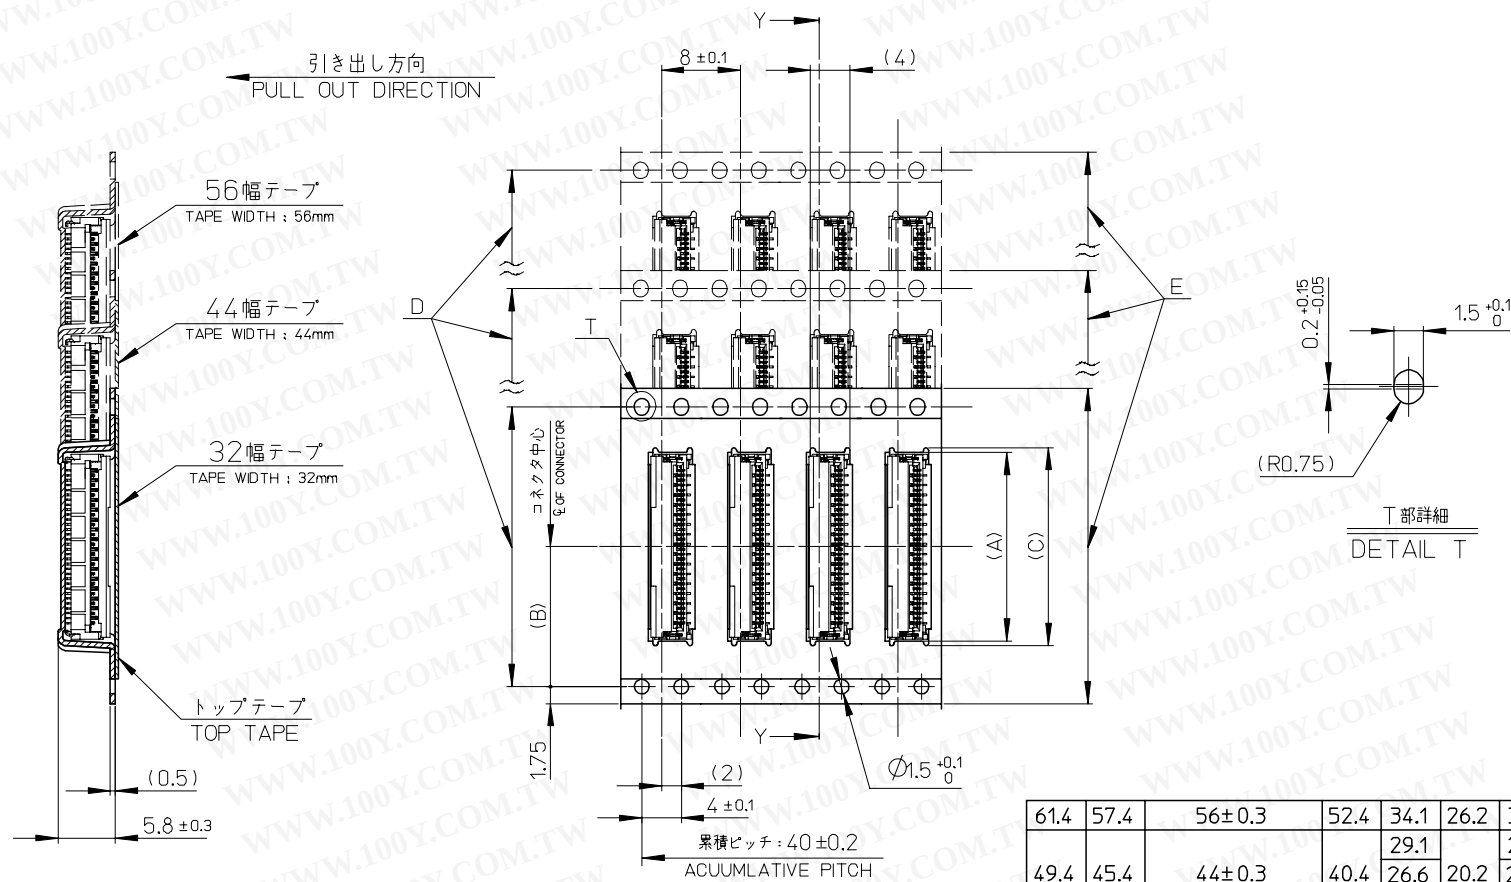

勝 特 力 材 料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

61.4	57.4	56±0.3	52.4	34.1	26.2	33.1	501951-6000	60
				29.1		28.1	501951-5000	50
49.4	45.4	44±0.3	40.4	26.6	20.2	25.6	501951-4500	45
				24.1		23.1	501951-4000	40
				20.1		19.1	501951-3200	32
37.4	33.4	32±0.3	28.4	19.1	14.2	18.1	501951-3000	30
				16.1		15.1	501951-2400	24
G	F	E キャリアテープ幅 CARRIER TAPE WIDTH	D	(C)	(B)	(A)	製品番号 MATERIAL NO.	極数 CIRCUITS

REVISED EC NO: J2007-2987 DRWN: TRSUZUKI CHKD: HIRATA APPR: HIRATA	DESCRIPTION REV	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM ONLY		SCALE ---	DESIGN UNITS METRIC	THIRD ANGLE PROJECTION		
		10 UNDER	±0.2	DRAWN BY TRSUZUKI	DATE 2005/12/05	TITLE 0.5 FPC CONN. HSG ASSY E/O STRAIGHT EMBSTP PKG (TIN-BISMUTH)				
		10 OVER 30 UNDER	±0.25	CHECKED BY HIRATA	DATE 2005/12/05					
		30 OVER	±0.3	APPROVED BY MSASAO	DATE 2005/12/05	MOLEX INCORPORATED				
		ANGULAR ±1 °		MATERIAL NO.		DOCUMENT NO.		SHEET NO.		
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		SD-501951-002		2 OF 2		
				THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION						