



PART NO.	ENG. NO.
02-06-1101	1561-(P901)
02-06-1103	1561-(P901)L
02-06-5101	1561-(P561)
02-06-5102	1561-(P561)L
02-06-5108	1561-(P228)
02-06-5109	1561-(P228)L
02-06-5100	1561-(P550)
02-06-5103	1561-(P550)L
02-06-5105	1561-(P591)
02-06-5104	1561-(P591)L
02-06-1118	1561-1(P901)
NOT TOOLED	1561-1(P901)L

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)



SECT. "B-B"
SCALE:10X



SECT. "C-C"
SCALE:10X

LEGEND


1561-*(****)*

BLANK=WITH LOCKING TABS
1-WITHOUT LOCKING TABS


P=PREPLATE
BLANK=POSTPLATE

FORM
BLANK=CHAIN
L=LOOSE

FINISH CODE




(.25) MAX.
.010
CARRIER CUTOFF

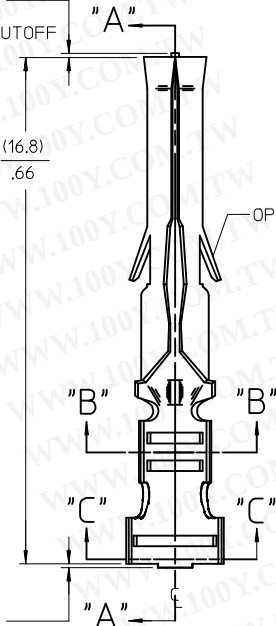


(.25) MAX.
.010
CARRIER CUTOFF

(1.50/1.42) DIA.
.059/.056

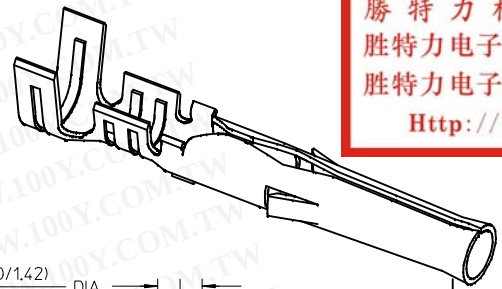

SELECT GOLD
PLATE DEPTH
(WHEN SPECIFIED)



SECT. "A-A"

- NOTES:
1. MATERIAL: BRASS
2. FINISH:
901 HOT TIN DIP (.00051)/.000020 MIN.
228 SELECT GOLD PLATE (.00075)/.000030 MIN. IN CONTACT AREA, SELECT TIN, (.00250)/.000100 MIN. IN CRIMP AREA OVER (.00125)/.000050 MIN. NICKEL OVERALL.
561 SELECT GOLD PLATE (.00076)/.000030 MIN. IN CONTACT AREA, OVER (.00127)/.000050 MIN. NICKEL OVERALL.
591 SELECT GOLD PLATE (.00175)/.000050 MIN. IN CONTACT AREA, OVER (.00127)/.000050 MIN. NICKEL OVERALL WITH (.000025)/.000010 MAX. GOLD FLASH OVERALL.
550 SELECT GOLD PLATE (.00038)/.000015 MIN. IN CONTACT AREA, OVER (.00076)/.000030 MIN. NICKEL OVERALL WITH (.000025)/.000010 MAX. GOLD FLASH OVERALL.
3. PRODUCT SPECIFICATION: PS-02-06.
4. PACKAGING INFORMATION: NOT AVAILABLE
5. TERMINAL FOR USE WITH (1.57)/.062 DIA. SERIES HOUSINGS AND WILL ACCEPT 18 THRU 24 AWG WIRE WITH (1.52/3.05)/.060/.120 INSULATION DIA.
6. PARTS CONFORM TO CLASS B REQUIREMENTS OF COSMETIC SPECIFICATION PS-45499-002.

CORRECT TOLERANCE EC NO: UCP2015-0937 DRWN:KIPPER 2014/09/02 CHKD:NGUYEN 2014/09/02 APPR:FSMITH 2014/09/04 REV	DESCRIPTION	QUALITY SYMBOLS	GENERAL TOLERANCES (UNLESS SPECIFIED)		DIMENSION STYLE MM/IN		SCALE 6:1	DESIGN UNITS INCH	 THIRD ANGLE PROJECTION		
		 =0  =0  =0		mm	INCH	DRAWN BY	DATE	TITLE CRIMP TERMINAL, FEMALE .062 DIA. FOR 18-24 AWG WIRE molex			
			4 PLACES	± ---	± ---	GEW	1991/02/19				
			3 PLACES	± ---	± .010	CHECKED BY	DATE				
			2 PLACES	± 0.25	± .014	RW	1991/02/19				
			1 PLACE	± 0.36	± ---	APPROVED BY	DATE				
				0 PLACE	±		GW	1991/02/19	DOCUMENT NO. SD-1561-*		
		ANGULAR ±1/2°		MATERIAL NO.		SHEET NO.					
		DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS		SEE CHART		1 OF 1					
		SIZE C THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX INCORPORATED AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION									