


■ 技术参数 SPECIFICATIONS


- 线数 (Poles) : 2~20
- 适用线规 (Applicable wire) : AWG28#~20#
- 适应基板厚度 (Applicable PC board thickness) : 1.2~1.6mm
- 温度范围 (Temperature range) : -25℃~85℃
- 额定电压 (Voltage rating) : 250V.Ac/Dc
- 额定电流 (Current rating) : 3A
- 接触电阻 (Contact resistance) : $\leq 0.02\Omega$
- 绝缘电阻 (Insulation resistance) : $\geq 1000M\Omega$
- 耐压 (Withstand voltage) : 1000V.Ac/1min
- 材料 (Material) :
 - 壳体 (Housing) : 尼龙 (PA66) UL94V-0
 - 端子 (Terminal) : 磷青铜 (Phos.bronze Tin/plated)

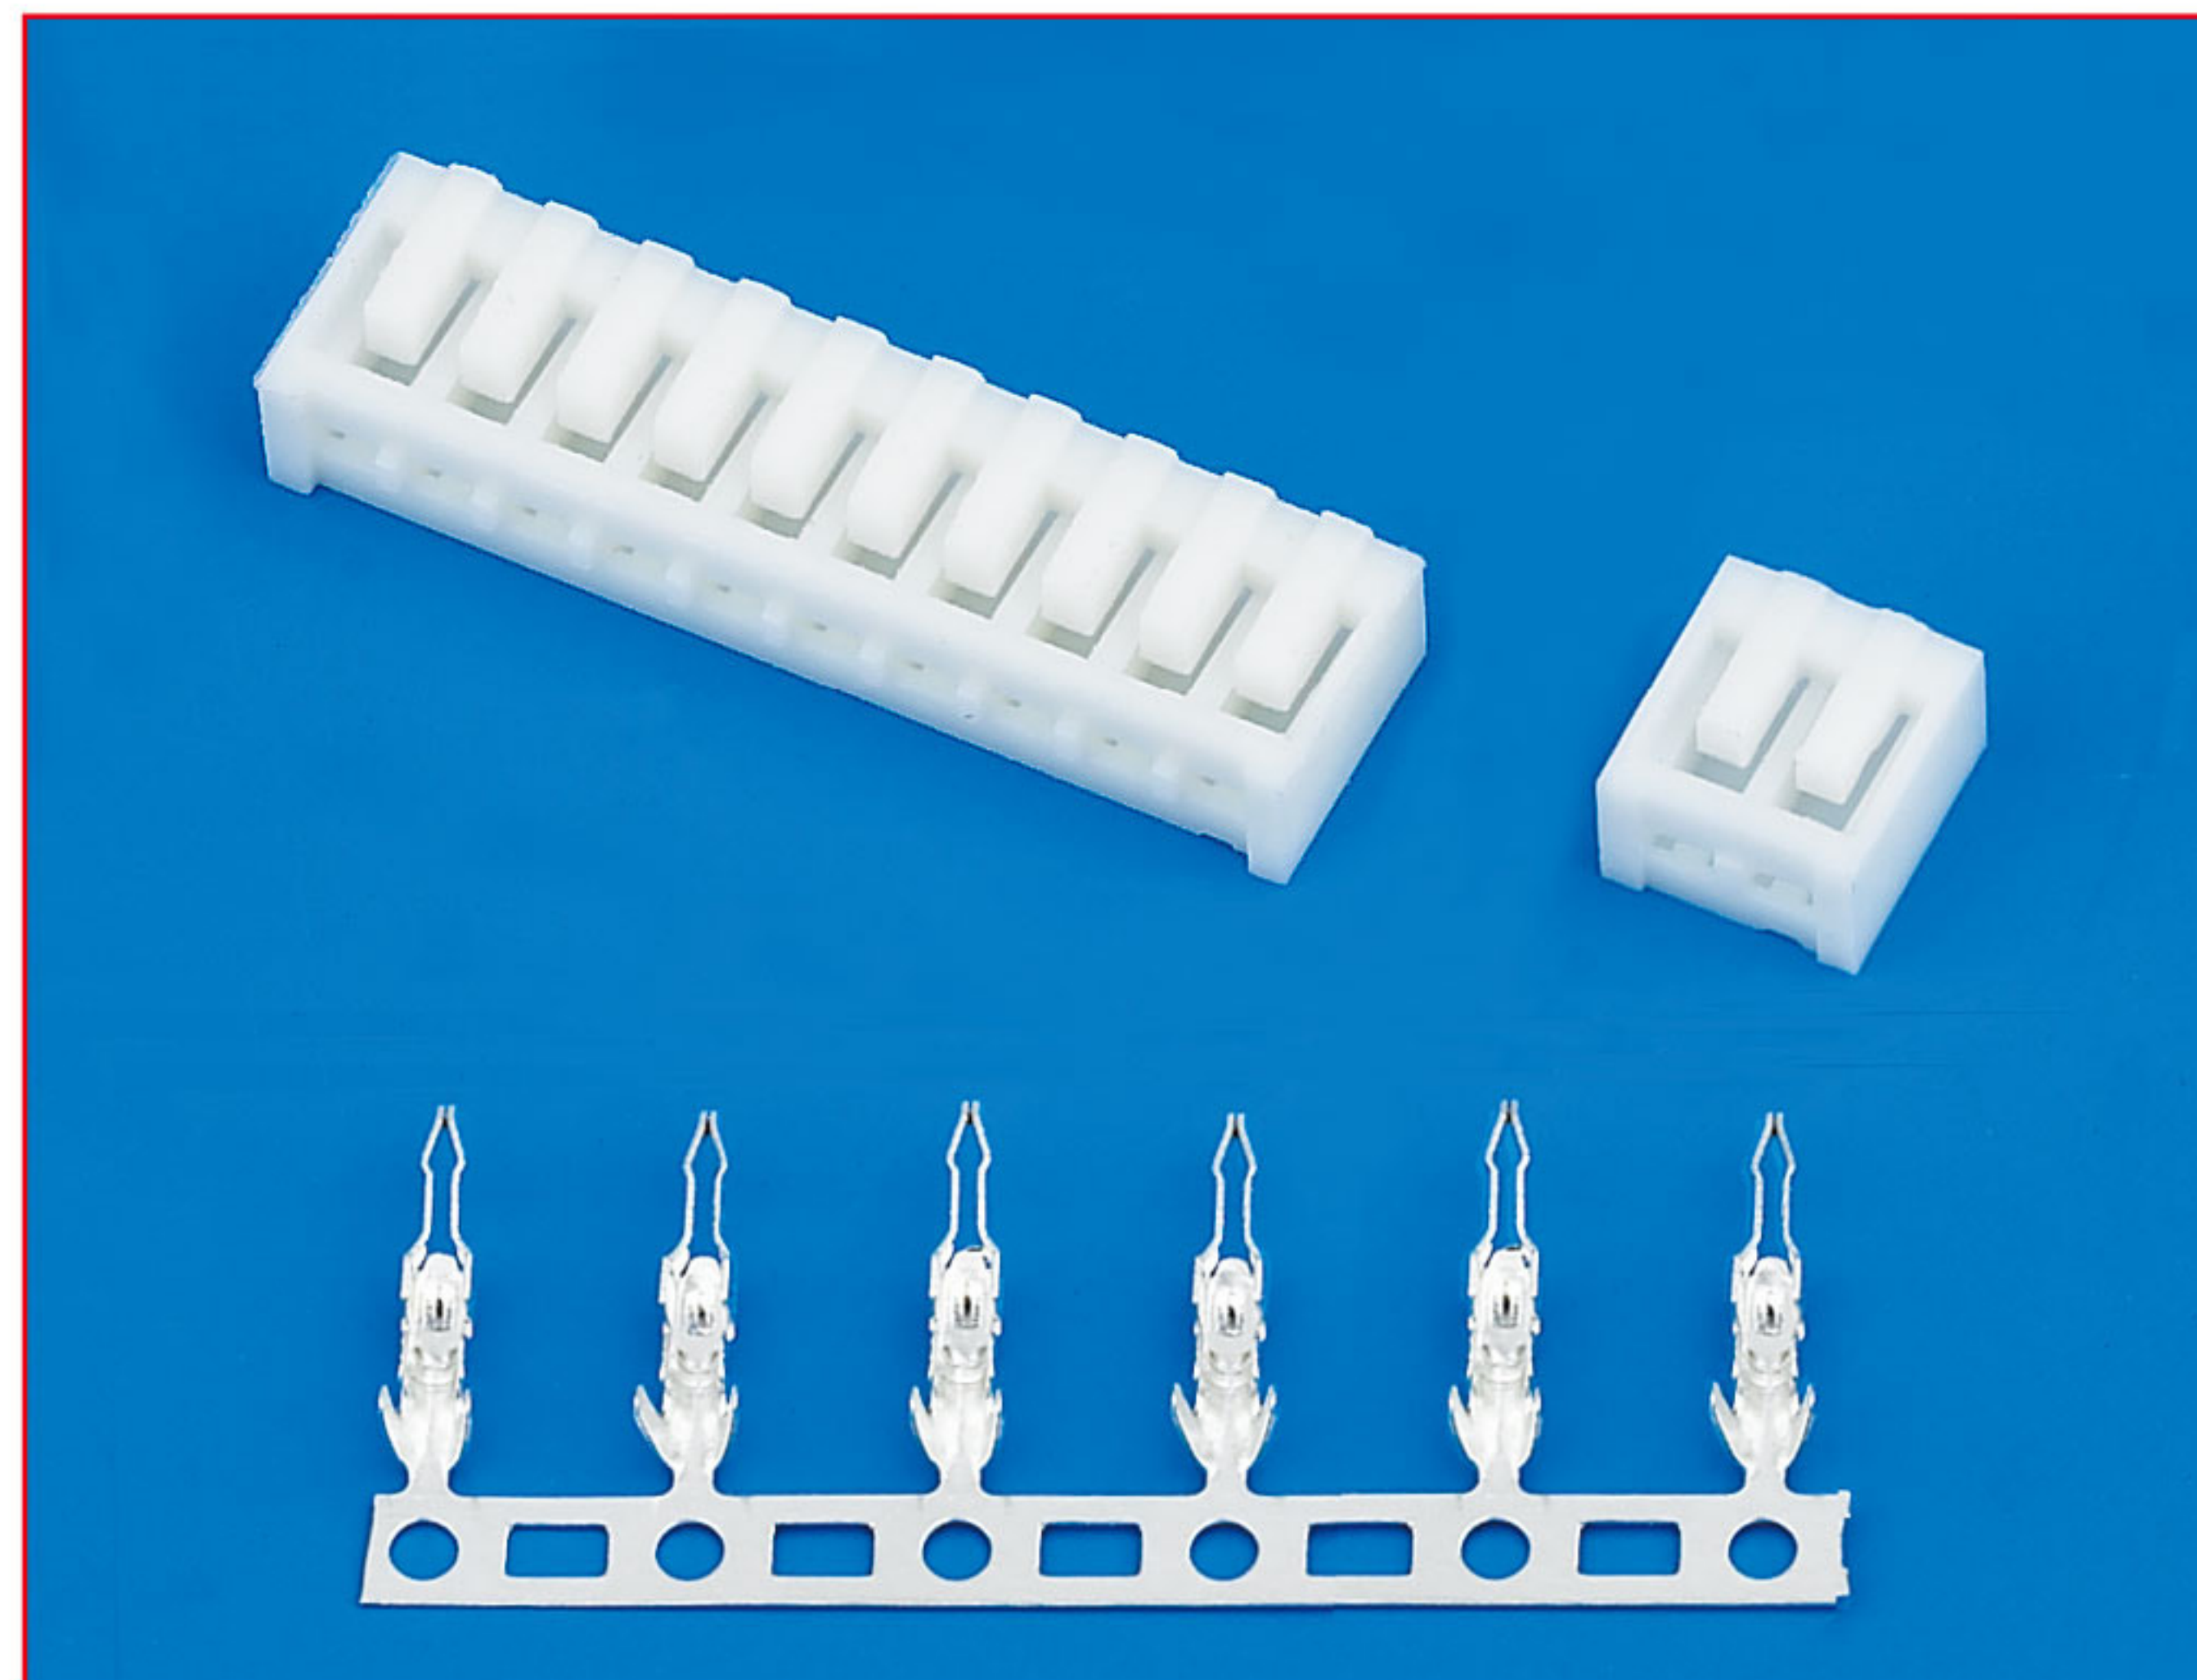



端子 TERMINAL(SCN)

型号 PART No.	适用线规 Applicable wire		电线外径 Insulation O.D	数量 Quantity
	mm ²	AWG#	mm	
HX25006-PT	0.08~0.33	28~22	1.0~1.8	8000PCS/盘
HX25006-31PT	0.13~0.5	26~20	1.2~1.9	8000PCS/盘


HX25006-2YSL (SCN)

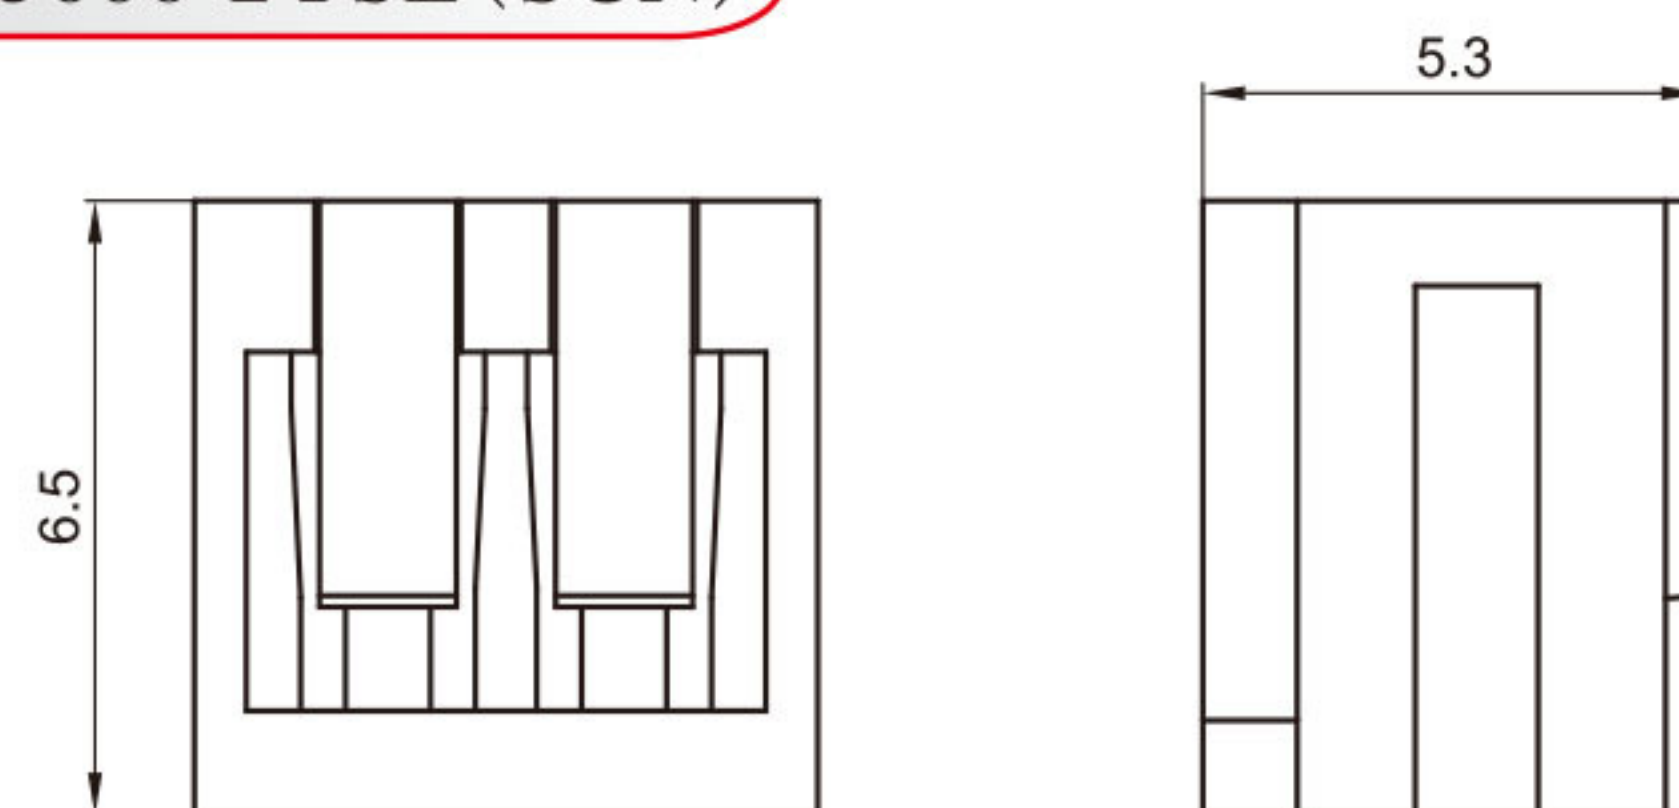

HX25006-PT (SCN)

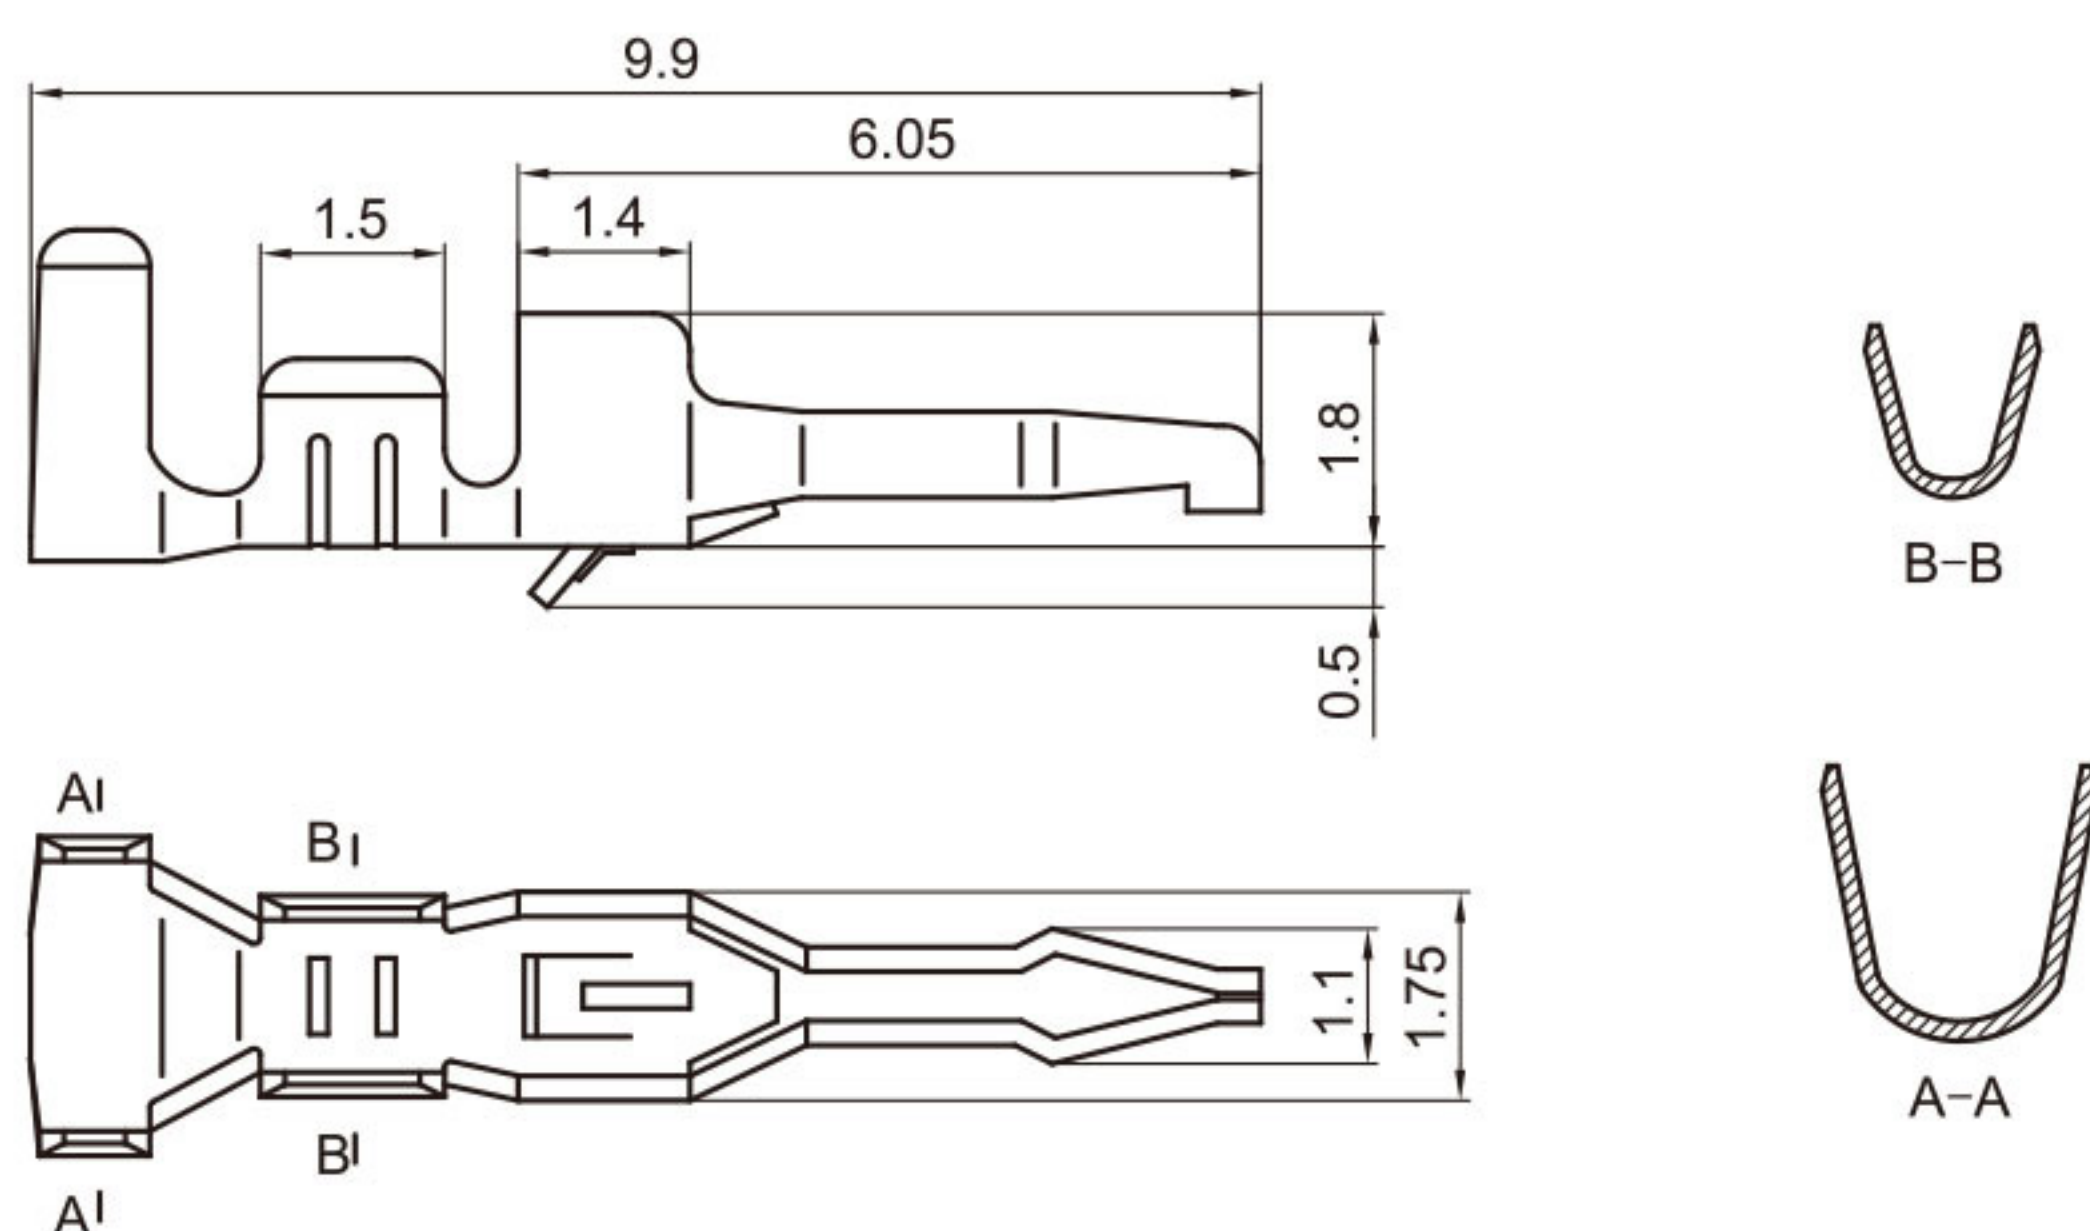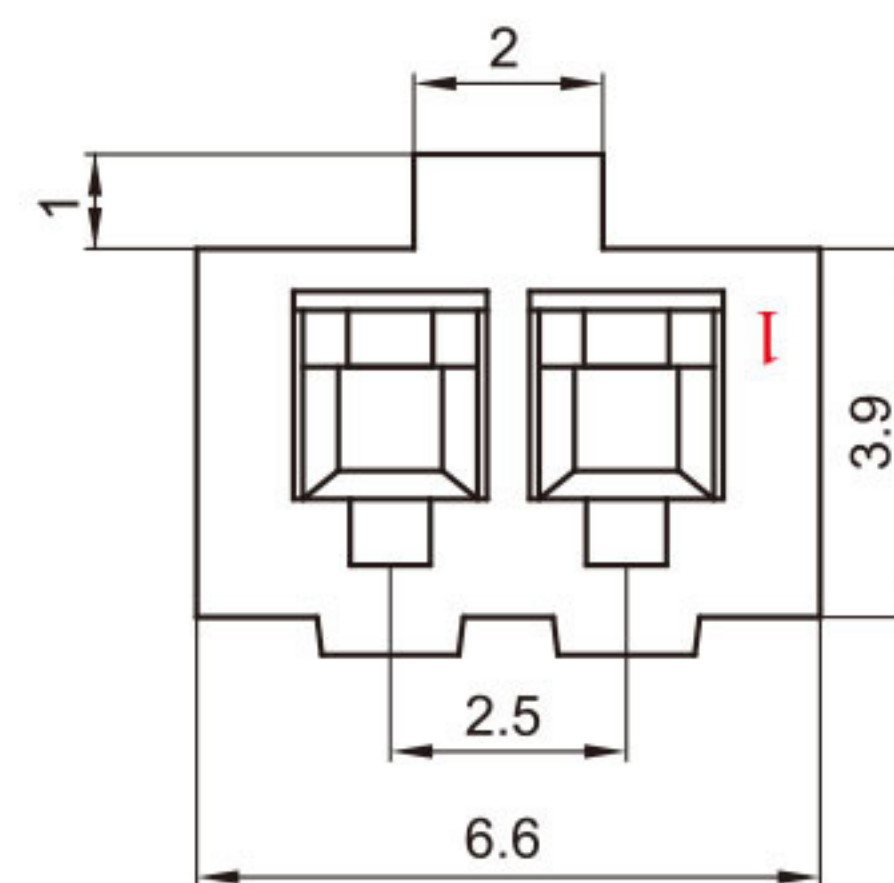


HX25006-Y (SCN)

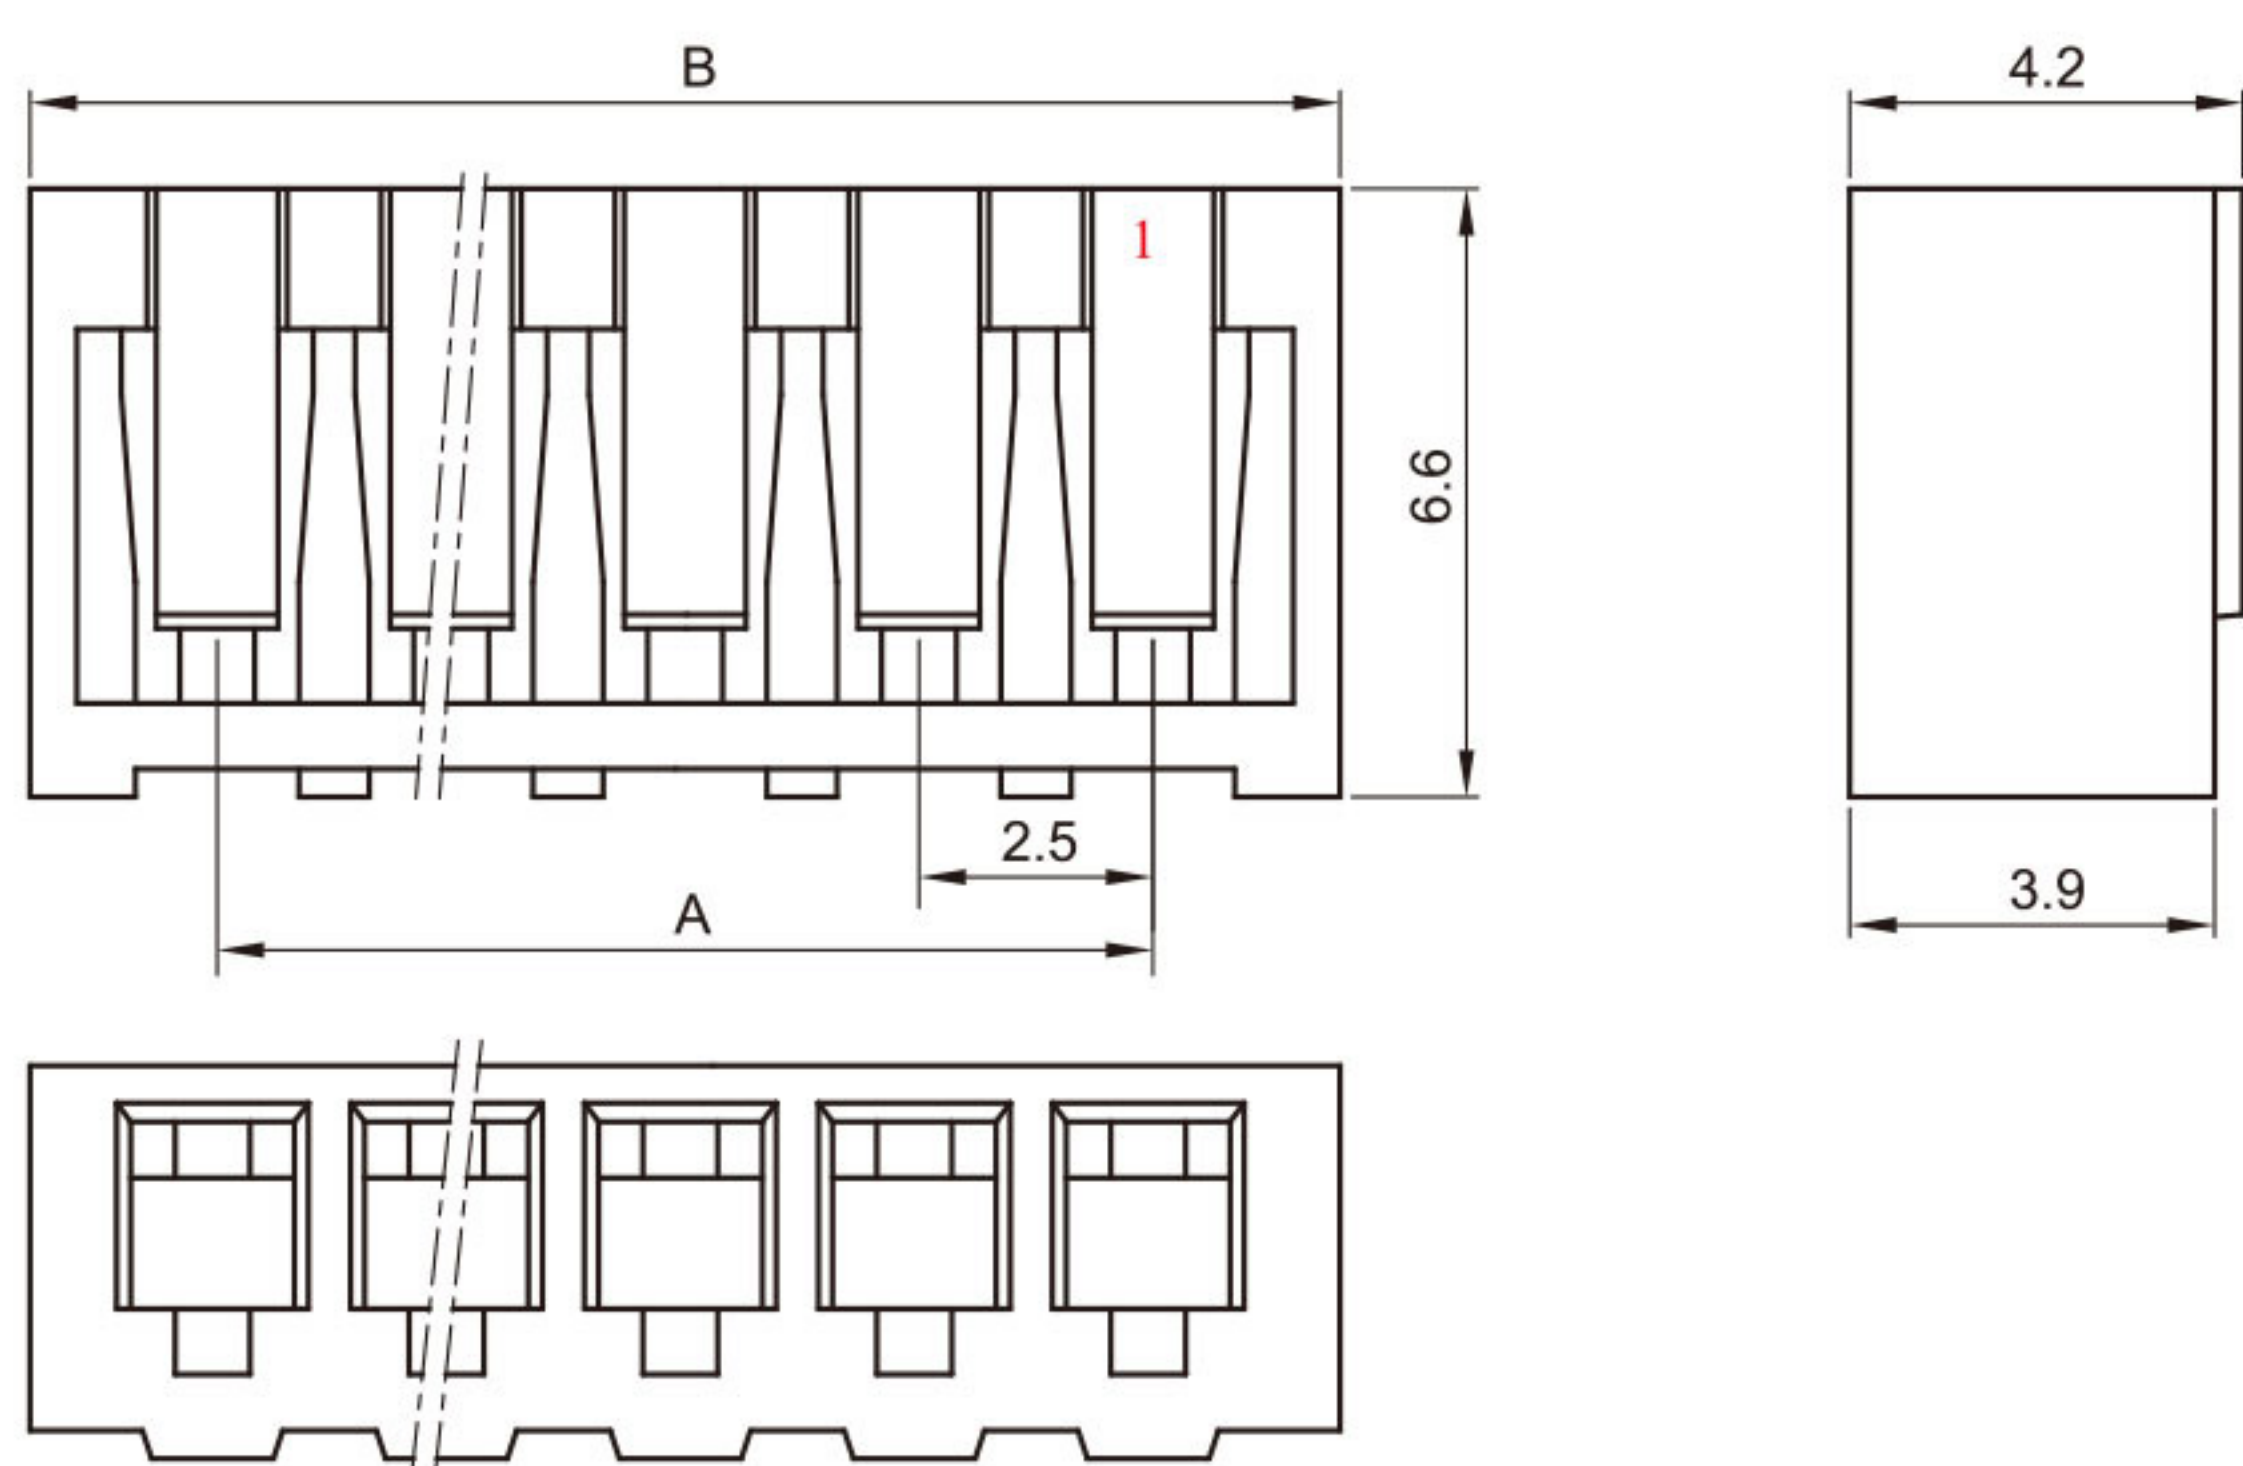

壳体 HOUSING (SCN)

线数 Poles	型号 PART No.	尺寸 Dimensions(mm)	
		A	B
2	HX25006-2Y	2.5	6.5
3	HX25006-3Y	5.0	9.0
4	HX25006-4Y	7.5	11.5
5	HX25006-5Y	10.0	14.0
6	HX25006-6Y	12.5	16.5
7	HX25006-7Y	15.0	19.0
8	HX25006-8Y	17.5	21.5
9	HX25006-9Y	20.0	24.0
10	HX25006-10Y	22.5	26.5
11	HX25006-11Y	25.0	29.0
12	HX25006-12Y	27.5	31.5
13	HX25006-13Y	30.0	34.0
14	HX25006-14Y	32.5	36.5
15	HX25006-15Y	35.0	39.0
16	HX25006-16Y	37.5	41.5
17	HX25006-17Y	40.0	44.0
18	HX25006-18Y	42.5	46.5
19	HX25006-19Y	45.0	49.0
20	HX25006-20Y	47.5	51.5

■ 安装尺寸 MOUNTING MEASUREMENT

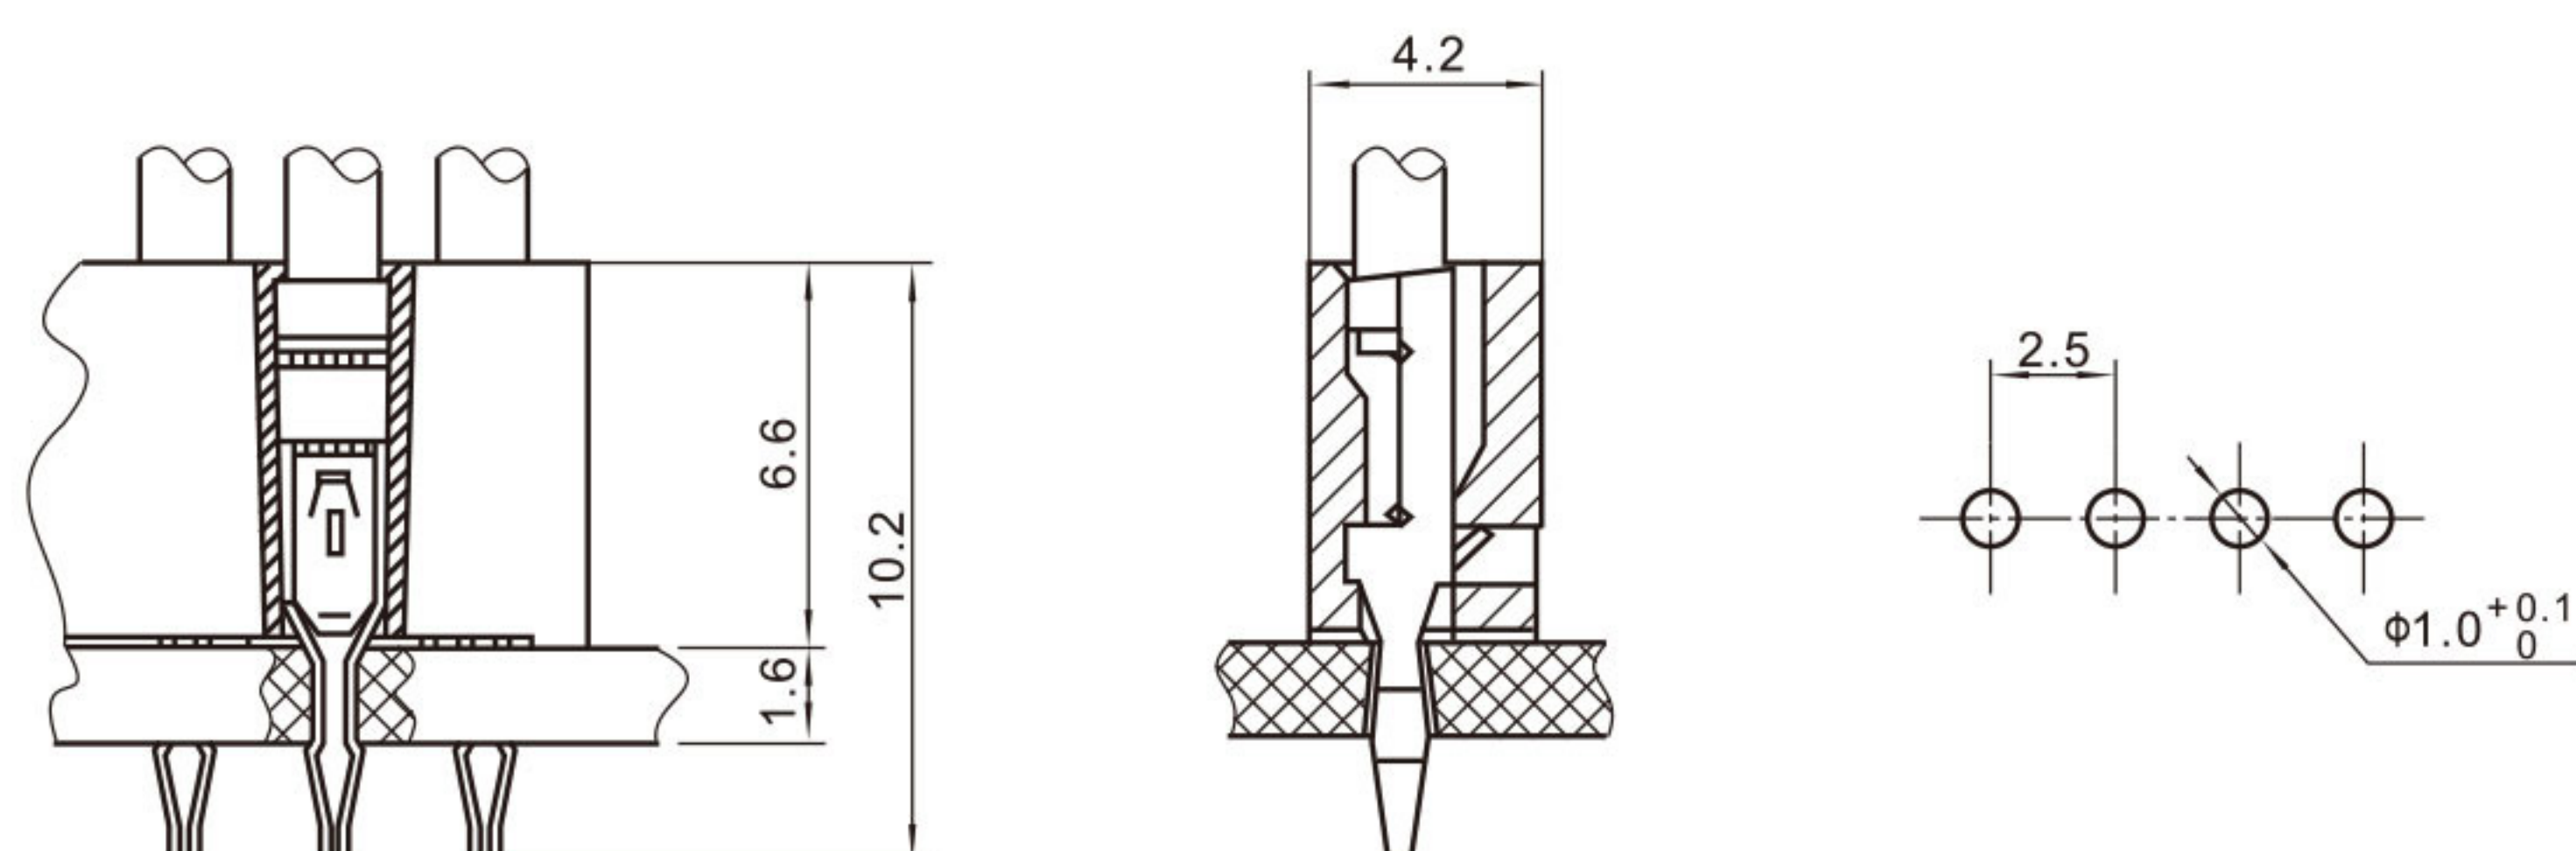

E


D

C


B

A




POLES	A	B
2	2.50	6.50
3	5.00	9.00
4	7.50	11.50
5	10.00	14.00
6	12.50	16.50
7	15.00	19.00
8	17.50	21.50
9	20.00	24.00
10	22.50	26.50
11	25.00	29.00
12	27.50	31.50
13	30.00	34.00
14	32.50	36.50
15	35.00	39.00

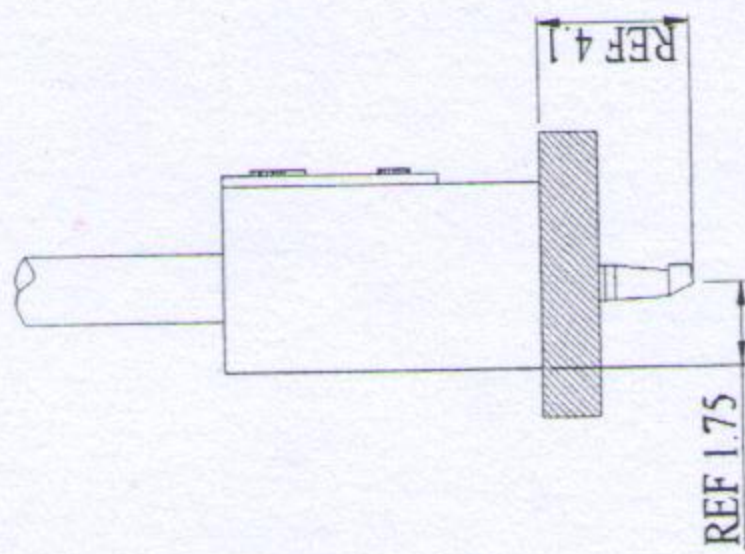

ASSEMBLY LAYOUT

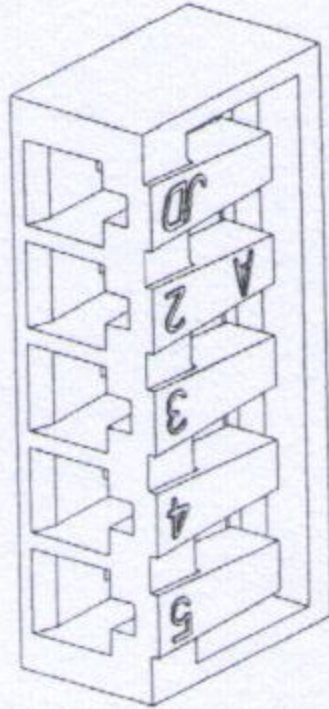

3D图示(参考)

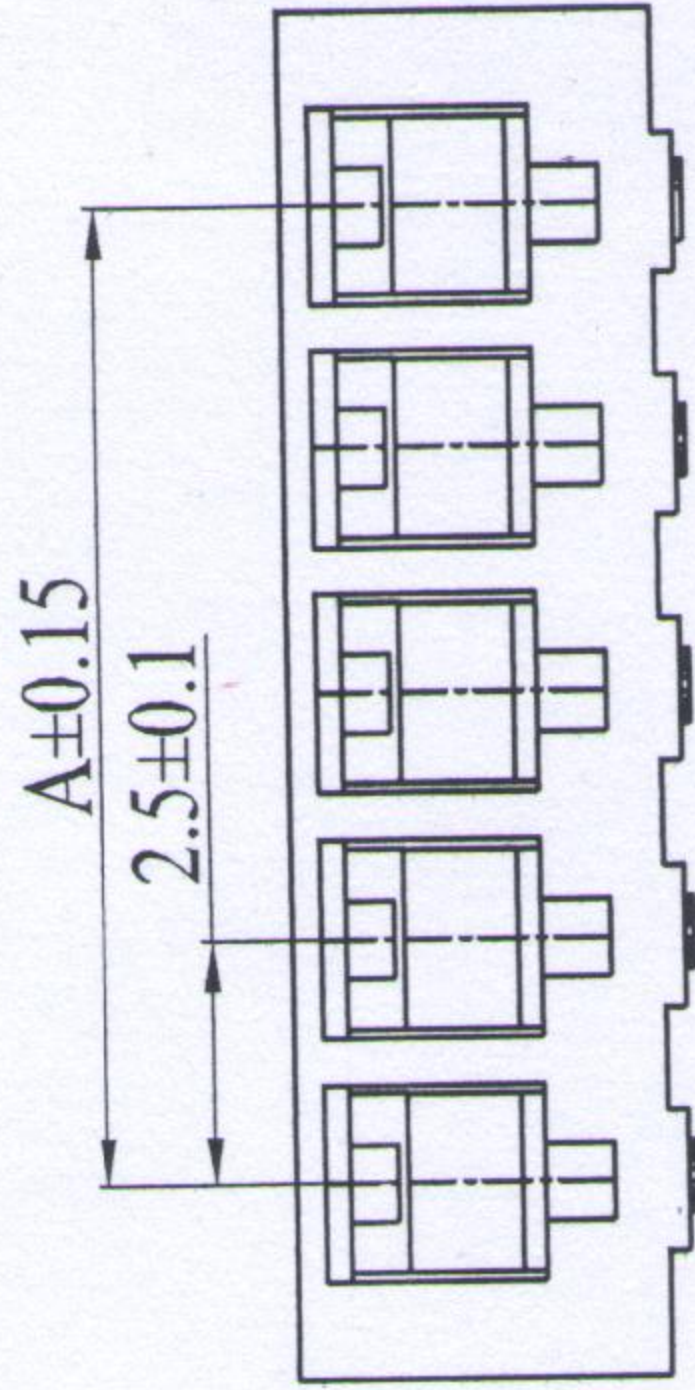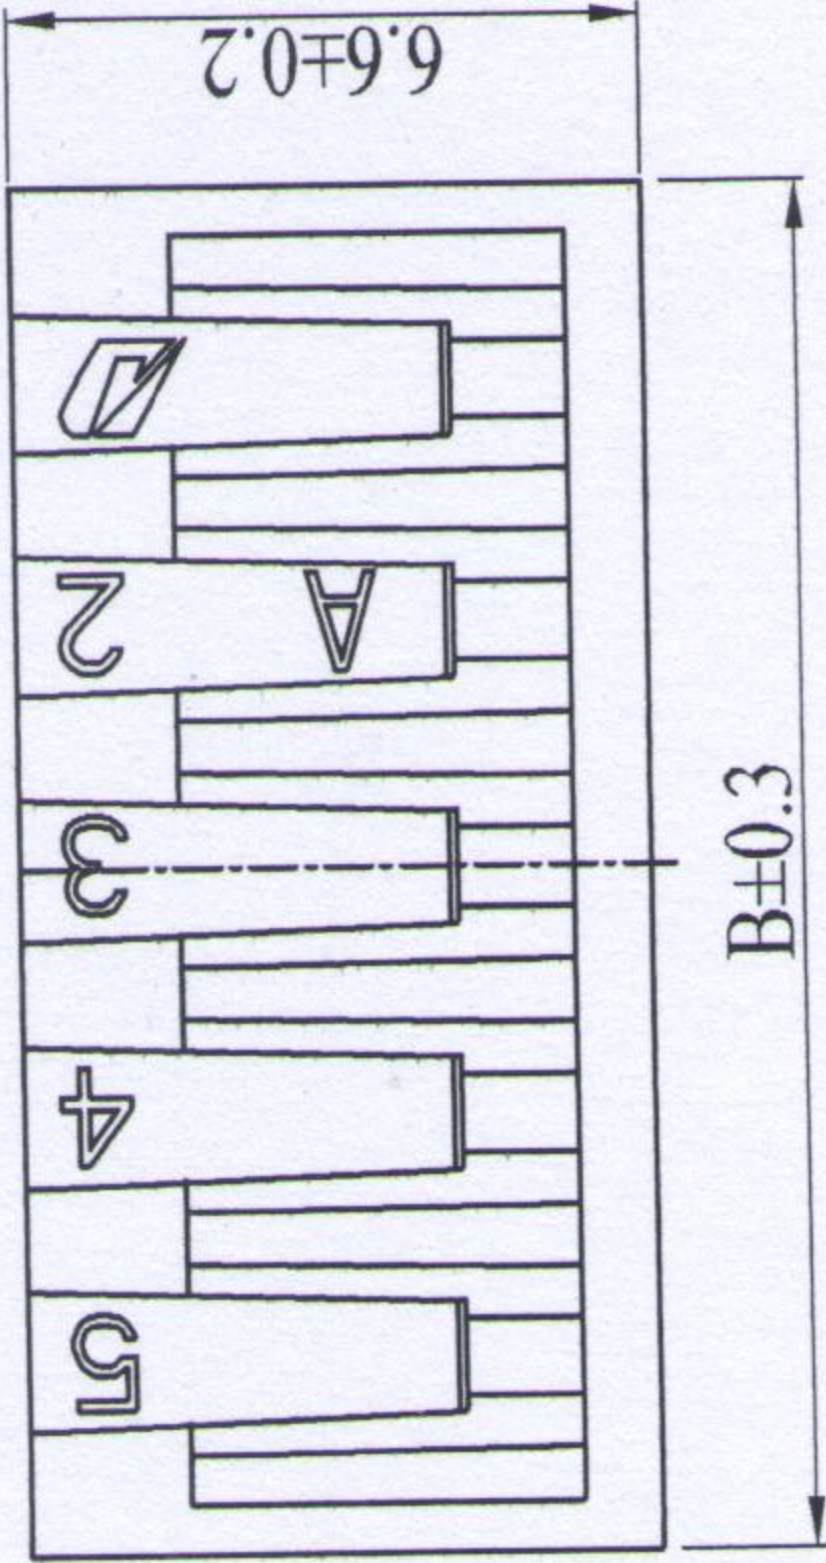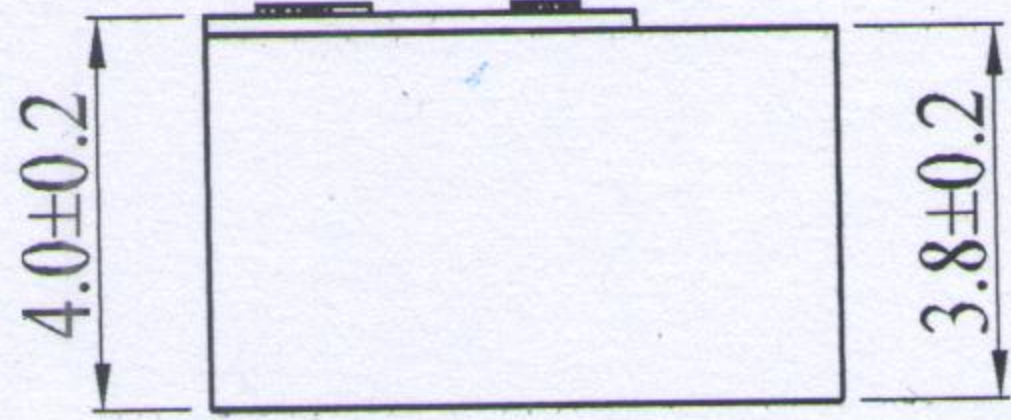

- 技术参数 (SPECIFICATIONS)
- ◆ 额定电压: 250V AC DC
 - ◆ Voltage rating: 250V AC DC
 - ◆ 额定电流: 3.0A AC DC
 - ◆ Current rating: 3.0A AC DC
 - ◆ 耐压值: 800V AC/minute
 - ◆ Withstand voltage: 800V AC/minute
 - ◆ 绝缘电阻: 1000MΩ MIN
 - ◆ Insulation resistance: 1000MΩ MIN
 - ◆ 接触电阻: 0.02Ω MAX(初始值)
 - ◆ Contact resistance: 0.02Ω MAX(Initial)
 - ◆ 工作温度: -25℃~+85℃
 - ◆ Working Temperature: -25℃~+85℃
 - ◆ 适用线规: 28~22AWG
 - ◆ Applicable Wire: 28~22AWG
 - ◆ 间距: 2.5 mm
 - ◆ Pitch: 2.5 mm
- 材料 (MATERIAL)
- ◆ 外壳: PBT(可根据客户定制尼龙66)
 - ◆ Housing: PBT (Customized PA66)

-2

-3

PRODUCT NAME:

SCN-nP

PRODUCT ID:

TITLT.

成品图

REV.

A

SHEET.





1/1

REVISEMENTS			
P	LTR	DESCRIPTION	DATE
			DWN
			APVD


- 技术参数 (SPECIFICATIONS)

 - 额定电压: 250V AC DC
 - Voltage rating: 250V AC DC
 - 额定电流: 3.0A AC DC
 - Current rating: 3.0A AC DC
 - 耐压值: 800V AC/minute
 - Withstand voltage: 800V AC/minute
 - 绝缘电阻: 1000MΩ MIN
 - Insulation resistance: 1000MΩ MIN
 - 接触电阻: 0.02Ω MAX(初始值)
 - Contact resistance: 0.02Ω MAX(Initial)
 - 工作温度: -25°C~+85°C
 - Working Temperature: -25°C~+85°C
 - 适用线规: 28~22AWG
 - Applicable Wire: 28~22AWG
 - 间距: 2.5 mm
 - Pitch: 2.5 mm
- 材料 (MATERIAL)

 - 端子: 磷青铜
 - Terminal: Phosphor bronze

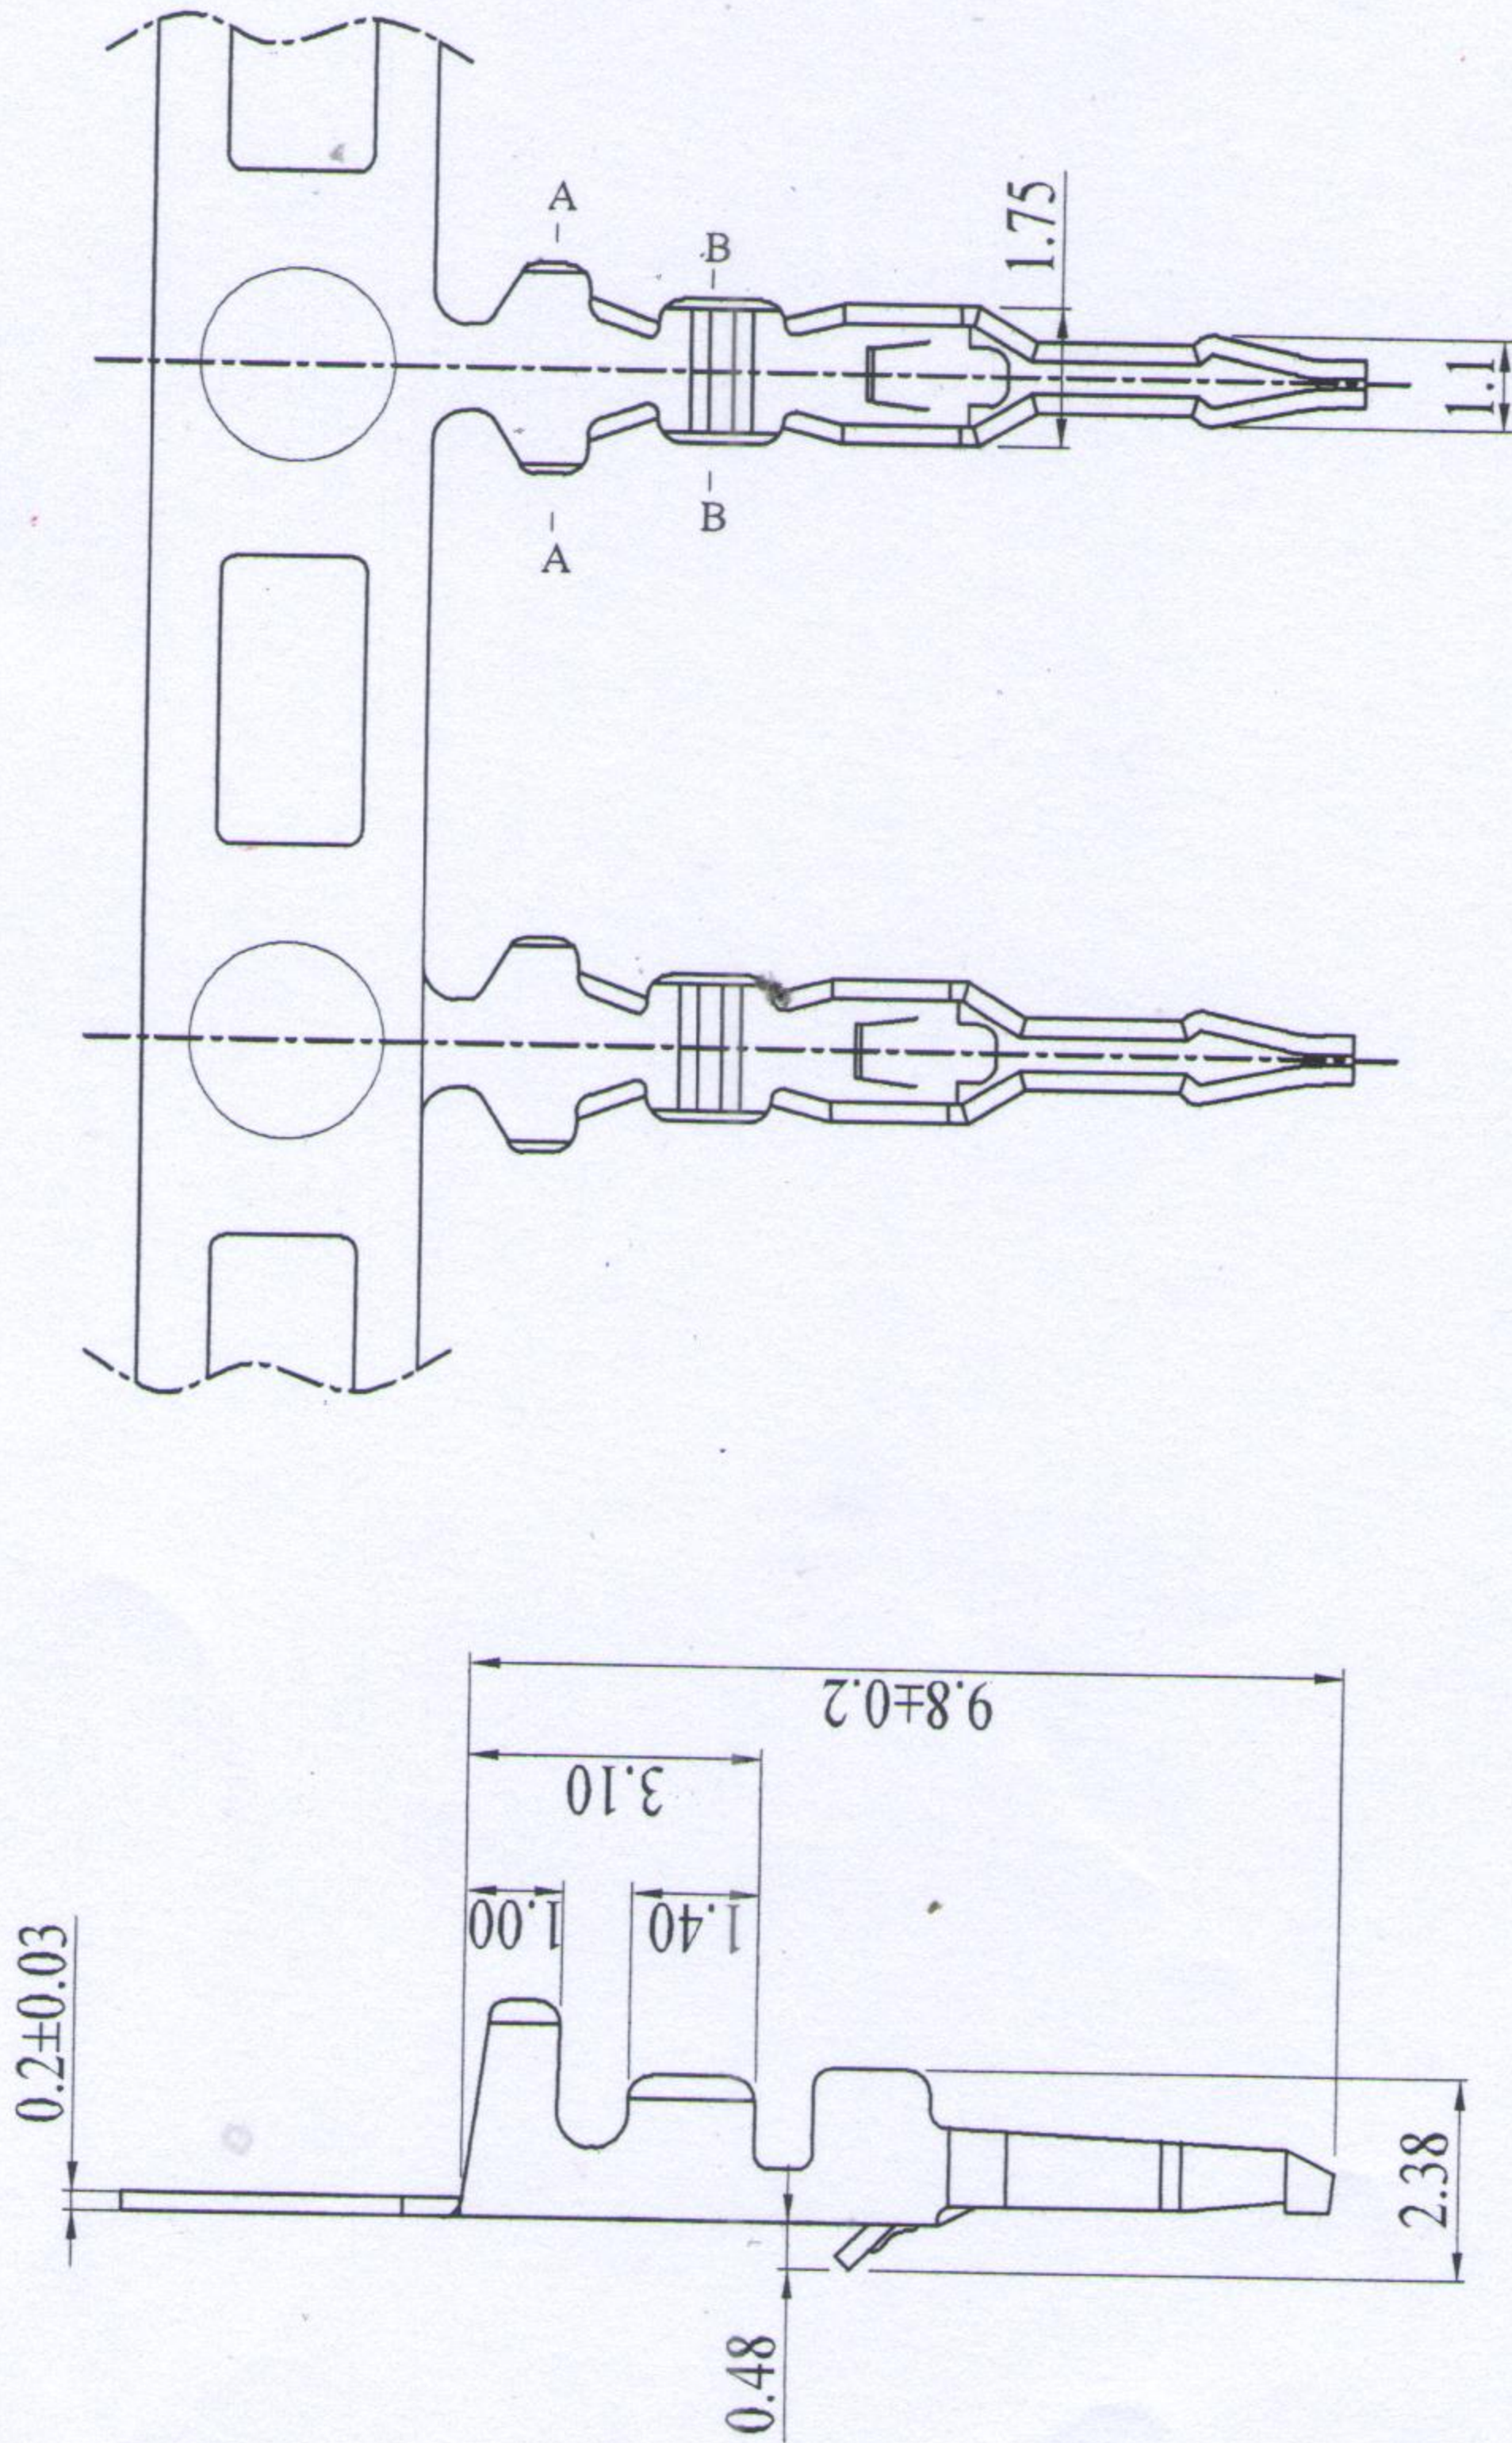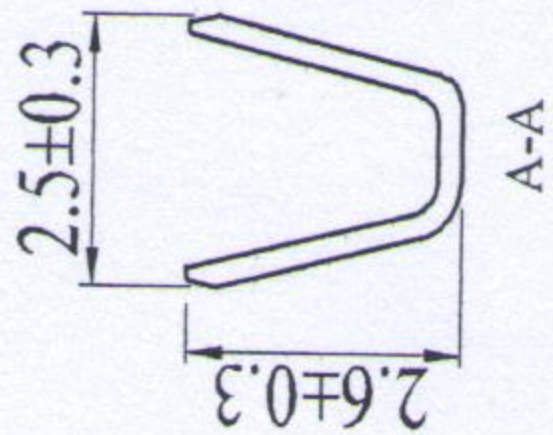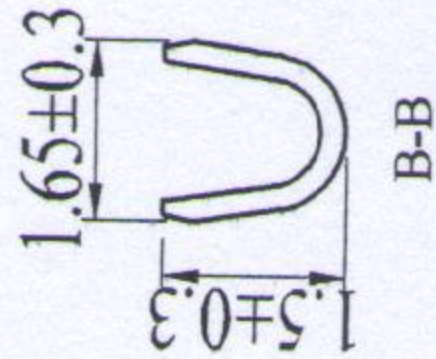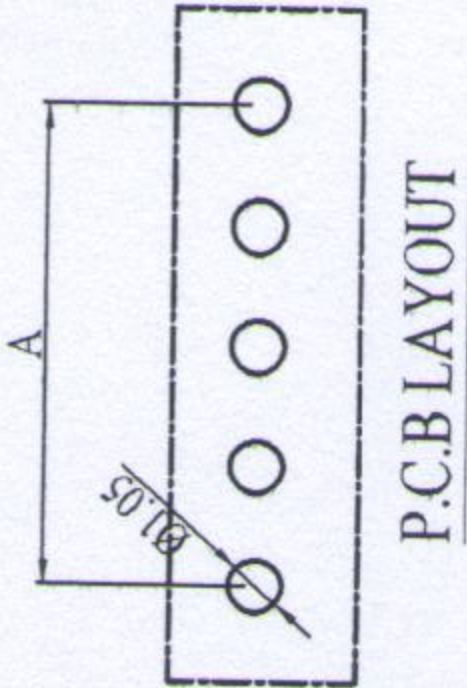

3D图示(参考)

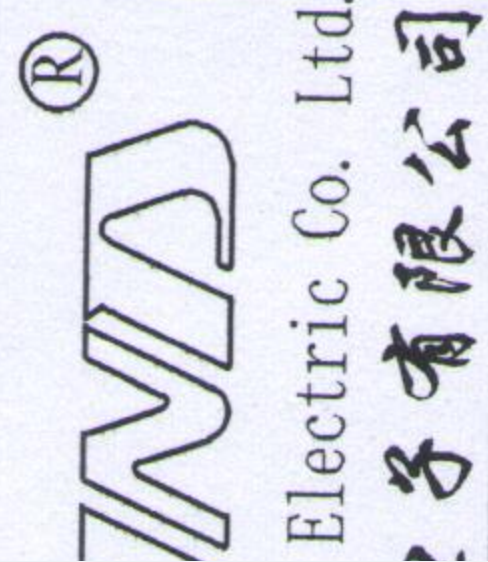

勝特力材料 886-3-5773766
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

PRODUCT ID	PRODUCT NAME	MATERIALS	FINISH	AWG	Q'ty/reel
	SCN-T	Phosphor Bronze	TIN	28 ~ 22	12000pcs
PRODUCT NAME: SEE TABLE		REV. A			
PRODUCT ID:		SHEET. 1/1			

成品图