



REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	AE	ECO-21-006960	26JUL2021	RK	MZ




勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

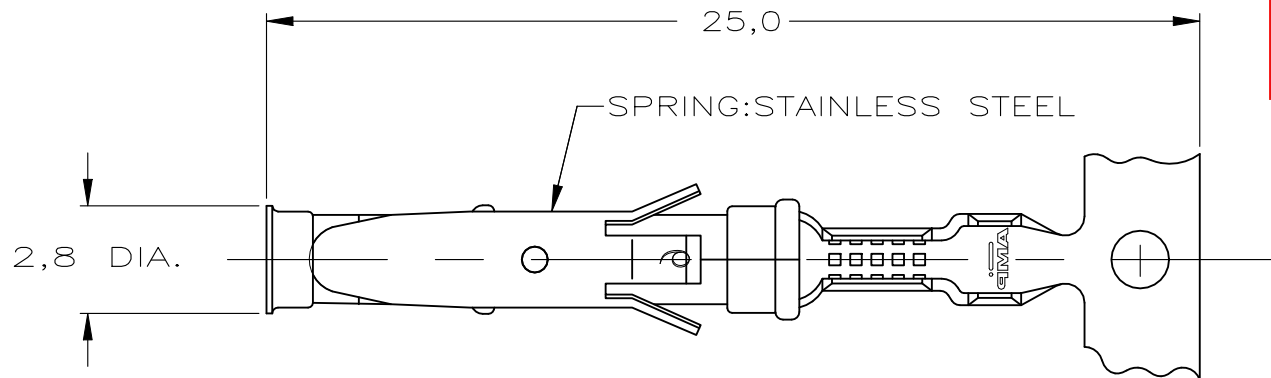


STRIP

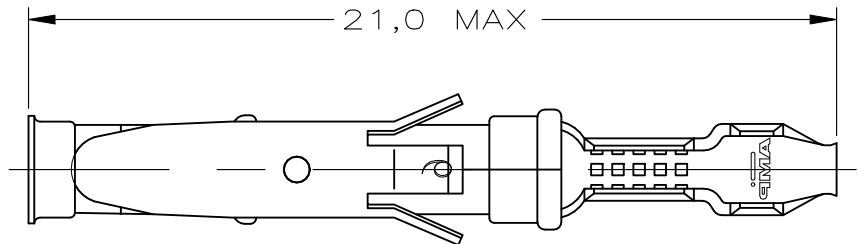

LOOSE-PIECE

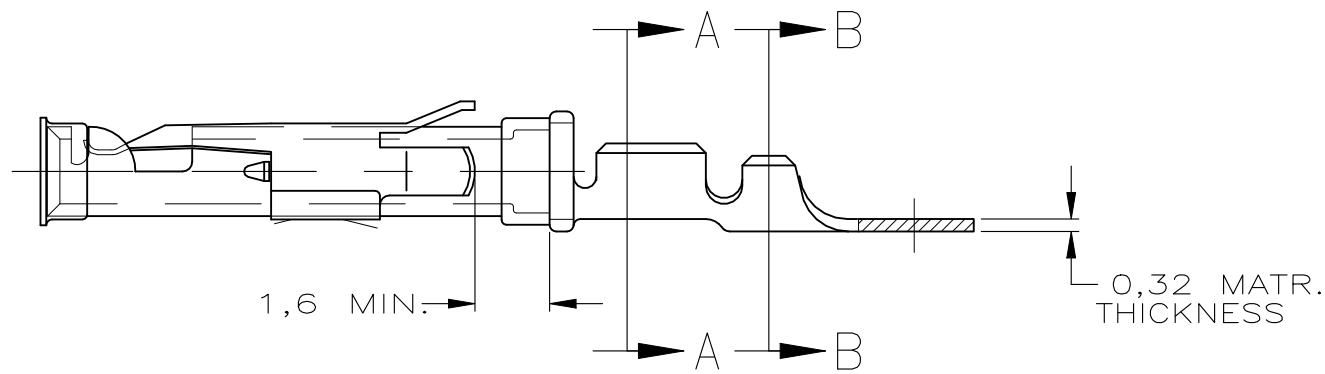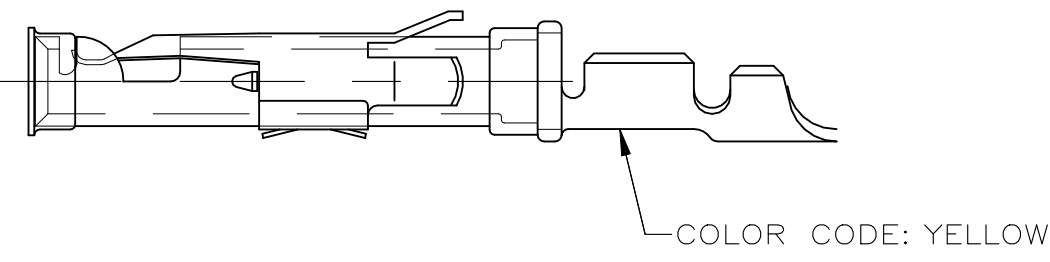


SECTION A-A



SECTION B-B

WIRE RANGE : 0,2-0,50 mm ² (24-20 AWG)
INSUL. RANGE : 1,1 -1,8 mm (.080-.100)

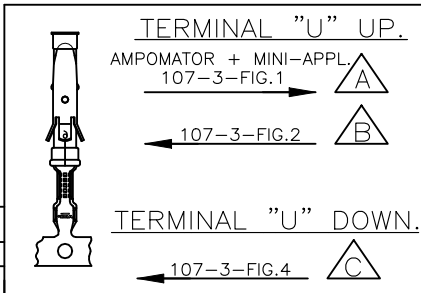

△ OBSOLETE
△ OBSOLETE
△ OBSOLETE
△ OBSOLETE

1-163087-5	△A	△61-163088-4	BRASS	SILVER	△28
1-163087-4	△A	△61-163088-4	BRASS	EL.TIN	△31 △20
1-163087-3	△A	△61-163088-3	BRASS	BR.TIN/LEAD	△30
△4 5-163087-3	△C		BRASS	ECON.GOLD	△21
△1 △4 5-163087-2	△C		BRASS	SEL.GOLD	△22
△1 △4 5-163087-1	△C		BRASS	EL.TIN	△20
1-163087-2	△B	△61-163088-1	BRASS	GOLD	△23
1-163087-1	△A		BRASS	ECON.GOLD	△21
1-163087-0	△B	1-163088-0	BRASS	ECON.GOLD	△21
163087-9	△A		BRASS	EL.TIN	△20
163087-8	△A		BRASS	SEL.GOLD	△22
△1 163087-2	△B	163088-2	BRASS	SEL.GOLD	△22
△1 163087-1	△B	163088-1	BRASS	EL.TIN	△20
PART NUMBER		DIRECTION OF REEL	LOOSE-PIECE	MATERIAL	PLATING

- NOTES :
- △1 UL RECOGNIZED UNDER E28476 VOL VI SEC I
 - 2 FOR CRIMP DETAILS SEE SPEC. 114-19000
 - 3 MEETS PRODUCT SPECIFICATION 108-10042
 - △4 SPECIAL REEL WITH 200PCS FOR REEL-FED HAND-TOOL
 - △5 OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI
 - △6 OBSOLETE
 - 7 OMISSION OF 6 CONTACTS MAX PER REEL OF 5000PCS
 - △31 LUBRICATED

NOTES	MATERIAL	THICKNESS	AREA
△20	TIN	2,0 μm	ALL OVER
△21	NICKEL GOLD TIN	.76 μm 1.01 μm	ALL OVER CONTACT AREA BARREL
△22	NICKEL GOLD TIN	1.27 μm .76 μm 1.01 μm	ALL OVER CONTACT AREA BARREL
△23	NICKEL GOLD GOLD	1,2 μm	ALL OVER CONTACT AREA ALL OVER
△27	NICKEL SILVER TIN	2,5 μm	ALL OVER CONTACT AREA BARREL
△28	SILVER NICKEL	1,5-2,5 μm 0,76 μm	ALL OVER
△29	SILVER	2,5 μm	ALL OVER
△30	NICKEL BR TIN	1,27 μm 1,27 μm	ALL OVER ALL OVER

THIS DRAWING IS A CONTROLLED DOCUMENT.	
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED:
	0 PLC ± - 1 PLC ± - 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± -
MATERIAL	FINISH
REFER TABLE	REFER TABLE

DWN M THAJUDEEN 21JULY2015	TE Connectivity			
CHK GANI NIMBENNAPPA 21JULY2015				
APVD PRASHANTH S 21JULY2015	NAME TYPE III+, SIZE 16, SOCKET ASS'Y, 24-20 AWG, 1.1-1.8mm DIA INSULATION			
PRODUCT SPEC 108-10042	-			
APPLICATION SPEC 114-19000	SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
WEIGHT 0.539g	A3	00779	C-163087	-
CUSTOMER DRAWING		SCALE	SHEET	REV
		-	1 OF 1	AE

Type III+ Stamped and Formed Contacts

1. SCOPE**1.1. Content**

This specification covers the performance, tests and quality requirements for TE Connectivity (TE) crimp Type III+, stamped and formed contacts. These contacts are used in connectors and other electronic components and are primarily intended for use where coupling means is provided separately from individual contact.

1.2. Qualification

When tests are performed on the subject product line, the procedures specified in Figure 1 shall be used. All inspections shall be performed using the applicable inspection plan and product drawing.

1.3. Successful qualification testing on the subject product line was completed on 26Jan88. The Qualification Test Report number for this testing is 501-66. This documentation is on file at and available from Engineering Practices and Standards (EPS).**2. APPLICABLE DOCUMENTS**

The following documents form a part of this specification to the extent specified herein. In the event of conflict between the requirements of this specification and the product drawing, the product drawing shall take precedence. In the event of conflict between the requirements of this specification and the referenced documents, this specification shall take precedence.

2.1. TE Documents

[109-1](#): Test Specification (General Requirements for Test Specifications)

109 Series: Test Specifications as indicated in Figure 1

[114-10004](#): Application Specification (Type III+ (Size 16) Contacts)

[501-66](#): Qualification Test Report (Type III+ Stamped and Formed Contacts)

2.2. Military Specification

MIL-W-16878/1 and /4: Wire, Electrical, Insulated, High Temperature

2.3. Reference Document

[502-1288](#): Engineering Report, Evaluation Testing of PdNi plating of Type III+ Pin Contacts

[502-134263](#): Engineering Report, Evaluation Testing of PdNi plating of Type III+ Socket Contacts

3. REQUIREMENTS**3.1. Design and Construction**

Product shall be of the design, construction physical dimensions and materials specified on the applicable product drawing.

3.2. Rating

- Current/Voltage: The continuous current rating for individual contacts cannot be applied directly to the number of contacts as they are dependent on the thermal and physical properties of the material. System design shall assure that continuous current rating does not create internal hot spots that exceed the temperature designated by the connector specification, during steady state or transient conditions.
- Operating temperature:
 - -55 to 150°C for precious metal plated contacts
 - -55 to 90°C for tin plated contacts

3.3. Test Requirements and Procedures Summary

Unless otherwise specified, all tests shall be performed at ambient environmental

Test Description	Requirements	Procedure																				
Examination of product.	Meet requirements of product drawing and Application Specification 114-10004.	EIA 364-18B Visual, dimensional and functional per applicable inspection plan.																				
ELECTRICAL																						
Termination resistance, specified current.	See Figure 4.	EIA 364-6C Measure potential drop of mated contacts after stabilizing. Calculate resistance. See Figure 3.																				
Termination resistance, dry circuit.	See Figure 4.	EIA 364-23C Subject mated contact pair to 50 millivolts open circuit at 100 milliamperes maximum. See Figure 3.																				
Current cycling.	Termination resistance, specified current.	EIA 364-55A, Condition B, Test Method 3. Subject mated contacts to 500 cycles at 125% of specified current for 30 minutes ON and 15 minutes OFF.																				
MECHANICAL																						
Contact engaging force.	See Figure 5 for maximum force per contact.	TE Spec 109-35. Measure force to engage using gage 2 as indicated in Figure 6. Engagement depth: .230 ± .010.																				
Contact separating force.	See Figure 5 for minimum force per contact.	TE Spec 109-35. Size 3 times using gage 2 as indicated in Figure 6, insert gage 1 and measure force to separate. Separation depth: .230 ± .010.																				
Crimp tensile.	<table><tr><th>Wire Size (AWG)</th><th>Crimp Tensile (lbs minimum)</th></tr><tr><td>14</td><td>40</td></tr><tr><td>16</td><td>40</td></tr><tr><td>18 & 1mm²</td><td>25</td></tr><tr><td>20 & 0.75mm²</td><td>17</td></tr><tr><td>22</td><td>10</td></tr><tr><td>24</td><td>7</td></tr><tr><td>26</td><td>4</td></tr><tr><td>28</td><td>2.5</td></tr><tr><td>30</td><td>1.5</td></tr></table>	Wire Size (AWG)	Crimp Tensile (lbs minimum)	14	40	16	40	18 & 1mm ²	25	20 & 0.75mm ²	17	22	10	24	7	26	4	28	2.5	30	1.5	EIA 364-8B Determine crimp tensile at a rate of 1 inch per minute.
Wire Size (AWG)	Crimp Tensile (lbs minimum)																					
14	40																					
16	40																					
18 & 1mm ²	25																					
20 & 0.75mm ²	17																					
22	10																					
24	7																					
26	4																					
28	2.5																					
30	1.5																					
Durability.	Show no evidence of damage; contact engaging and separating force.	EIA 364-9C, except cycle rate shall not exceed 300 cycles per hour. Contacts shall be installed in a suitable fixture and subjected to 500 cycles for precious metal plated contacts and 50 cycles for tin plated contacts. The applicable counterpart connector inserts may be used for the fixture.																				

Figure 1 (continued)

Test Description	Requirements	Procedure
ENVIRONMENTAL		
Thermal shock.	Shall show no evidence of damage; meet termination resistance, dry circuit; termination resistance, specified current; and engaging and separating force.	EIA 364-32G Subject mated contacts to 10 cycles between -55 and 90°C for tin plated contacts and -55 and 150°C for precious metal plated contacts.
Humidity/temperature cycling.	Termination resistance, dry circuit; engaging and separating force.	EIA 364-31D, Method IV, Condition B. Subject mated connectors to 10 humidity/temperature cycles between 25 and 65°C at 95% RH with cold shock at -10°C less Step 7b.
Mixed flowing gas.	Show no evidence of damage; meet termination resistance, dry circuit; and termination resistance, specified current.	EIA 364-65B, Class IIA Subject mated contacts to environmental class IIA for 10 days.
Temperature life.	Shall show no evidence of damage; meet termination resistance, dry circuit; termination resistance, specified current; and engaging and separating force.	EIA 364-17C Subject mated connectors to temperature life for 240 hours at 150°C for precious metal plated contacts and 90°C for tin plated contacts.

3.4. Connector Tests and Sequences


Test or Examination	Test Group (a)		
	1	2	3(e)
	Test Sequence (b)		
Examination of product	1,10	1	1,8
Termination resistance, specified current		2,4	
Termination resistance, dry circuit	2,7		2,5,7
Current cycling		3	
Contact engaging force	8		
Contact separating force	9		
Crimp tensile		5	
Durability	3		
Thermal shock	4		6
Humidity/temperature cycling	6(d)		3
Mixed flowing gas	6(c)		
Temperature life	5		4



NOTE

- (a) *Contacts shall be prepared in accordance with applicable Instruction Sheets. They shall be selected at random from current production. All test groups shall consist of 10 samples of each part number (pin and socket). One-half of the samples shall be crimped to maximum gauge wire and the other half crimped to minimum gauge wire. All wire lengths shall be a minimum of 12 inches.*
- Precious metal plated contacts shall be crimped to wire conforming to MIL-W-16878/4, Type E.*
 - Tin plated contacts shall be crimped to wire conforming to MIL-W-16878/1, Type B.*
- (b) *Numbers indicate sequence in which tests are performed.*
- (c) *Precious metal plated samples only.*
- (d) *Tin plated samples only.*
- (e) *Test group 3 was tested with 1mm² and 0.75mm² size wire only*

Figure 2

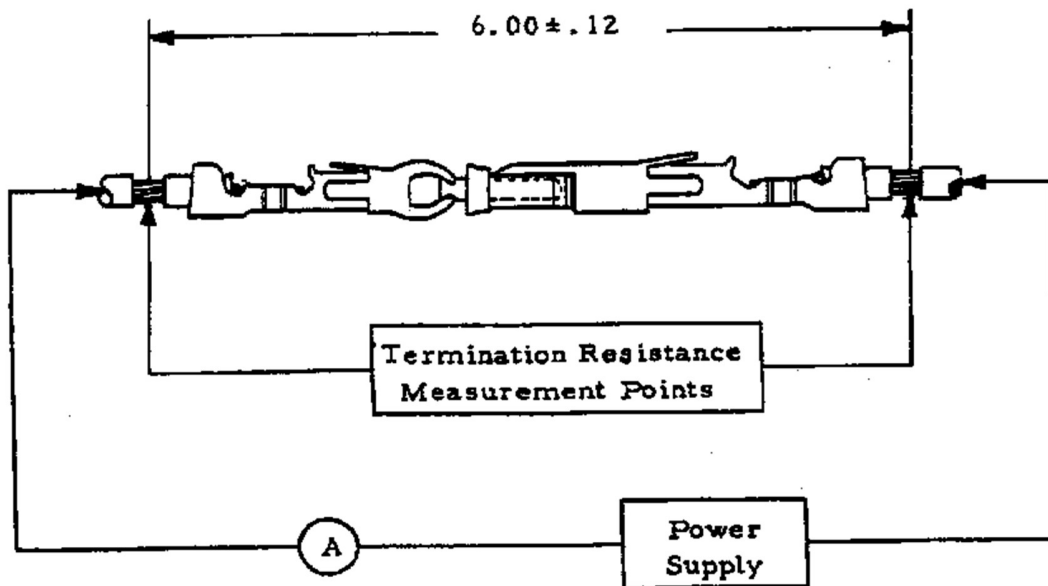

i **NOTE**
Termination resistance equals millivolts divided by test current less resistance of 4.5 inches of wire.

Figure 3
Termination Resistance Measurement Test Circuit


Mating End Size	Wire Size (AWG)	Test Current (amperes)	Resistance (milliohms maximum)
16	14	17	6.00
	16 & 1mm ²	13	6.50
	18 & 0.75mm ²	10	7.50
	20	7.5	9.00
	22	5.0	9.50
	24	3.0	14.5
	26	2.0	19.0
	28	1.5	30.0
	30	1.2	43.0

i **NOTE**
Single contact free air test currents only, not to be construed as connector rating currents, used only for testing.

Figure 4
Termination Resistance

Mating End Size	Pin Diameter (inches)	Minimum Separation (ounces)	Maximum Engagement (ounces)
16	.0625	1.5	36.0

Figure 5
Contact Engagement and Separation Force

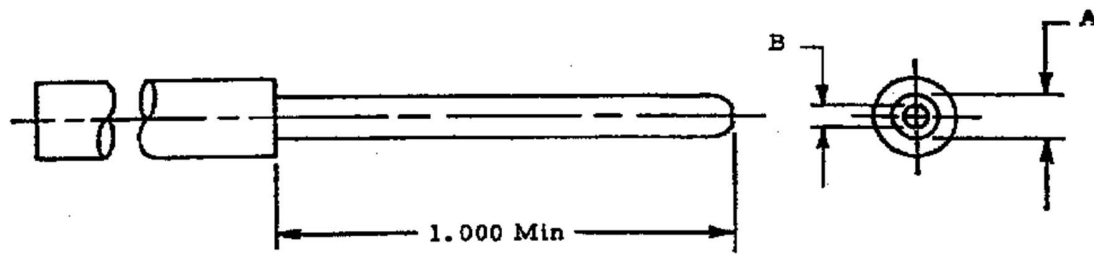

Gage Number	Contact Size	A	B Maximum Flat
1	16	.0615 +.0001/-.0000	.015
2	16	.0635 +.0000/-.0001	.015

Figure 6
Engaging and Separating Gages