



© 2022TE Connectivity. All Rights Reserved.

REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED	25NOV2009	Y.O	T.K
	D	REVISED	31MAY2022	M.J	T.S

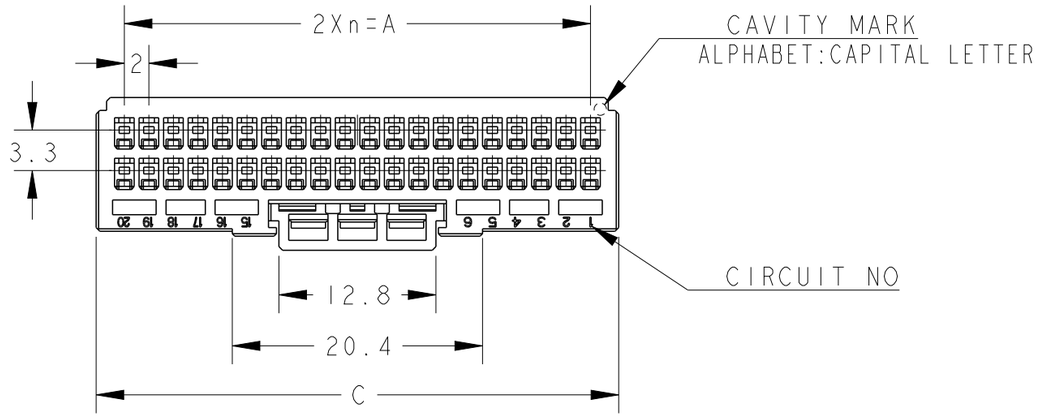

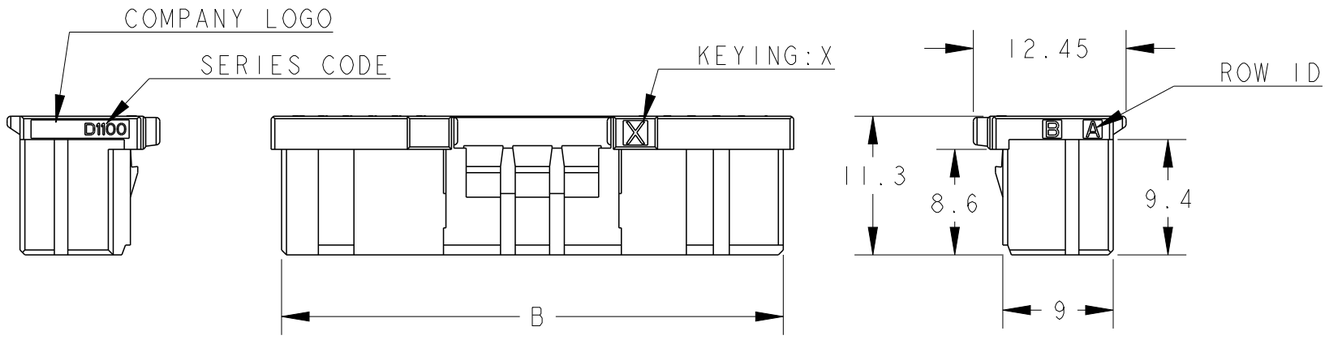

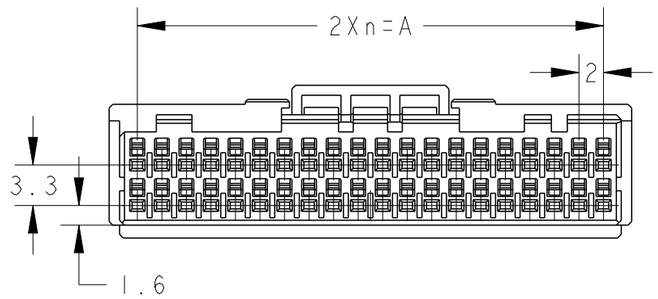

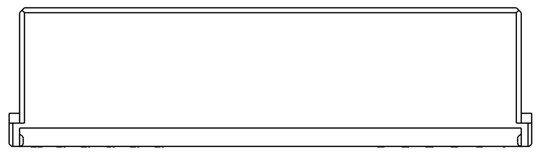

40POS(X-KEY):1-1827863-0

1. MATERIAL:GLASS FILLED THERMO PLASTIC POLYESTER(94V-0), COLOR:BLACK
2. THE SHAPE, SIZE AND POSITION OF THE CHARACTER SHOW THE OUTLINE. THEY DON'T SHOW DETAILS.
3. THE KEYING ARRNGEMENT OF "Y" IS SYMMETRIC WITH "X".

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
http://www.100y.com.tw

POS	KEY	n	A	B	C	PART NO
40	Y	19	38.0	40.9	42.6	2-1827863-0
40	X	19	38.0	40.9	42.6	1-1827863-0
34	Y	16	32.0	34.9	36.6	2-1827863-7
34	X	16	32.0	34.9	36.6	1-1827863-7
32	X	15	30.0	32.9	34.6	1-1827863-6
30	X	14	28.0	30.9	32.6	1-1827863-5
28	X	13	26.0	28.9	30.6	1-1827863-4
26	Y	12	24.0	26.9	28.6	2-1827863-3
26	X	12	24.0	26.9	28.6	1-1827863-3
24	X	11	22.0	24.9	26.6	1-1827863-2
22	X	10	20.0	22.9	24.6	1-1827863-1

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm

TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3,±5°
0 PLC ±-
1 PLC ±-
2 PLC ±-
3 PLC ±-
4 PLC ±-
ANGLES ±-

MATERIAL 1

FINISH -

DWN T.KUDO 16MAR2005
CHK D.MITSUGI 23AUG2005
APVD D.MITSUGI 23AUG2005
PRODUCT SPEC 108-78268,78298
APPLICATION SPEC 114-5377
WEIGHT -

CUSTOMER DRAWING

TE Connectivity


NAME DYNAMIC D1100D 2.0mm PITCH REC HSG 22-40POS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1827863	-


SCALE 2:1 SHEET 1 OF 3 REV D

© 2022 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

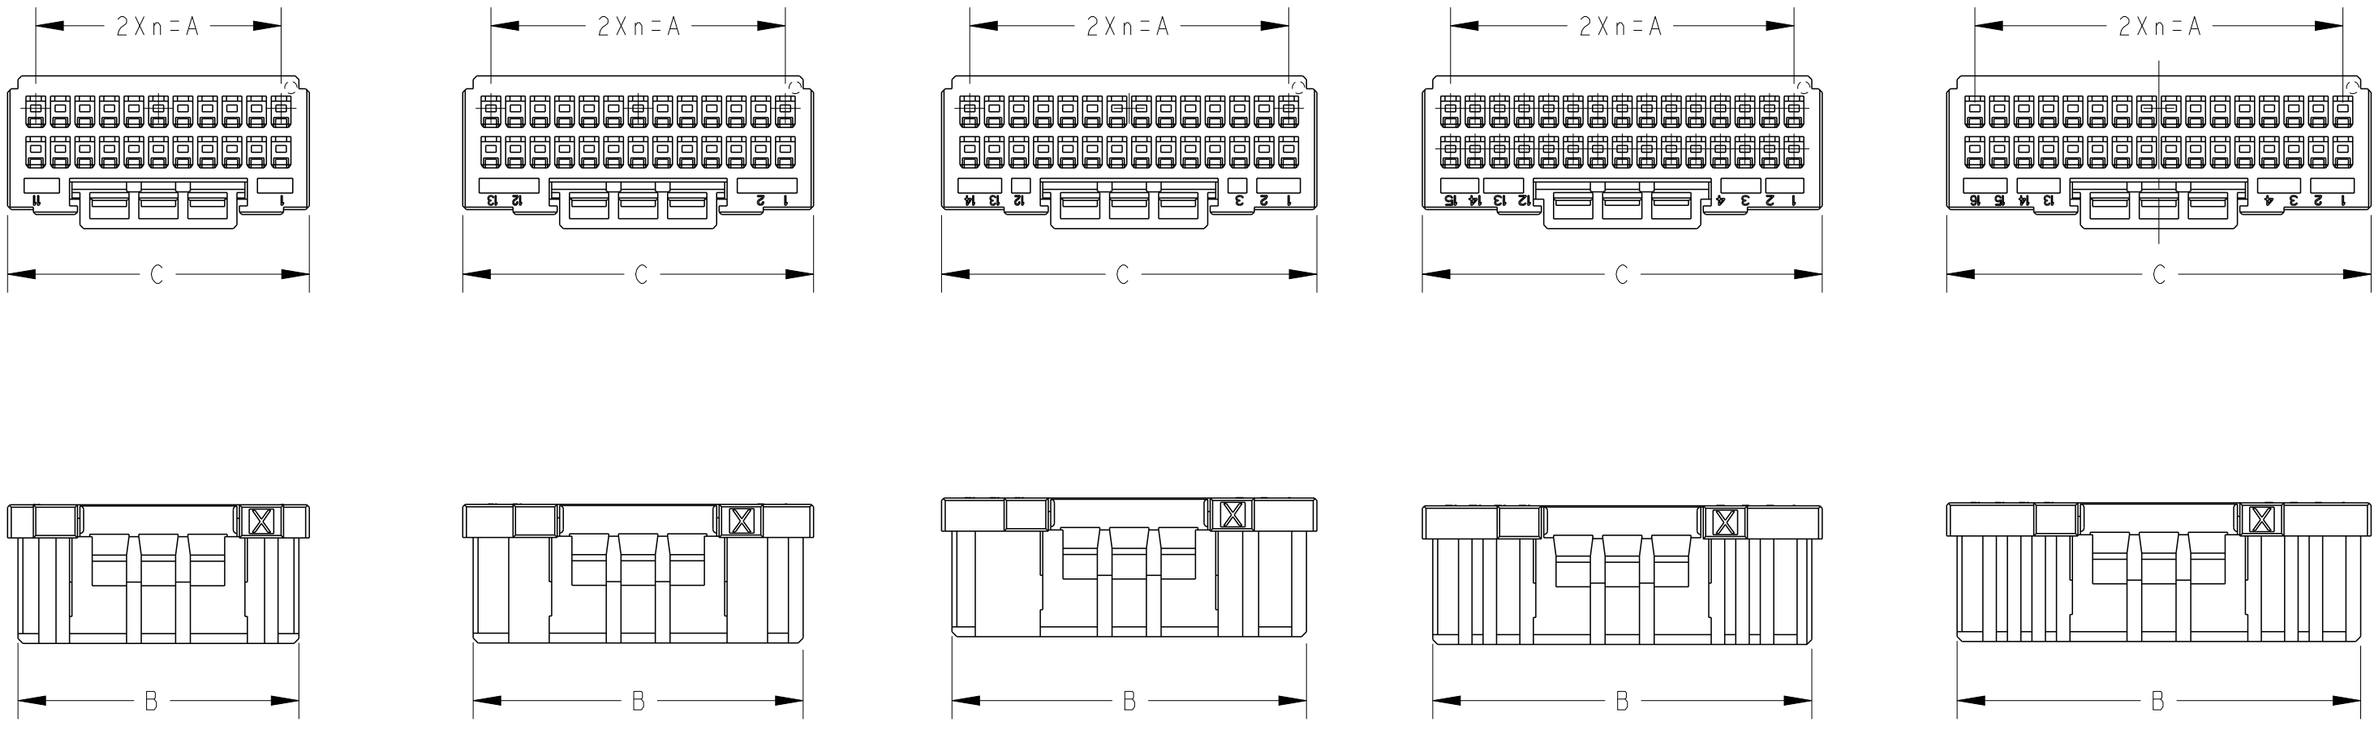


22POS(X-KEY):1-1827863-1




26POS(X-KEY):1-1827863-3

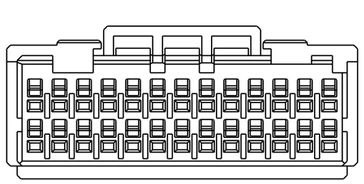


28POS(X-KEY):1-1827863-4

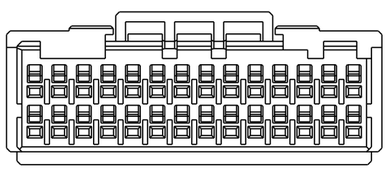

30POS(X-KEY):1-1827863-5

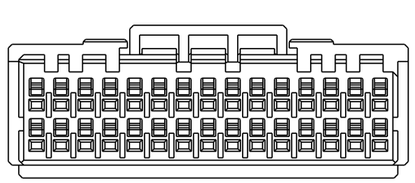


32POS(X-KEY):1-1827863-6

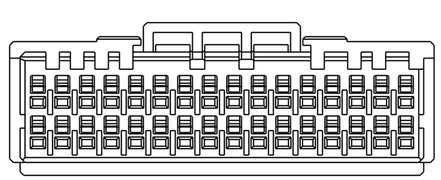



THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN T.KUDO 16MAR2005	TE Connectivity
DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3,±5°	CHK D.MITSUGI 23AUG2005	NAME DYNAMIC D1100D 2.0mm PITCH REC HSG 22-40POS
	0 PLC ±- 1 PLC ±- 2 PLC ±- 3 PLC ±- 4 PLC ±- ANGLES ±-	APVD D.MITSUGI 23AUG2005	
		PRODUCT SPEC 108-78268,78298	
		APPLICATION SPEC 114-5377	SIZE A3 / CAGE CODE 00779 / DRAWING NO C-1827863 / RESTRICTED TO -
MATERIAL SEE SHEET 1	FINISH -	WEIGHT -	
		CUSTOMER DRAWING	SCALE 2:1 / SHEET 2 OF 3 / REV D


© 2022 TE Connectivity. All Rights Reserved.


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
		SEE SHEET 1			

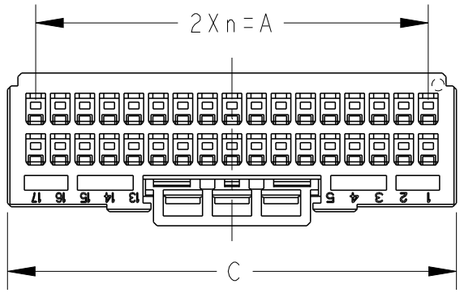

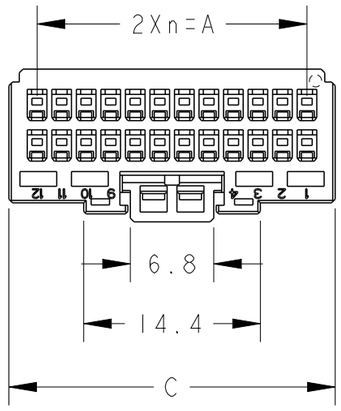


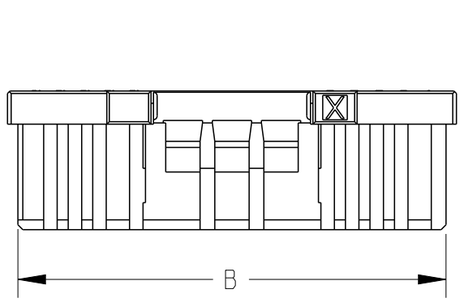

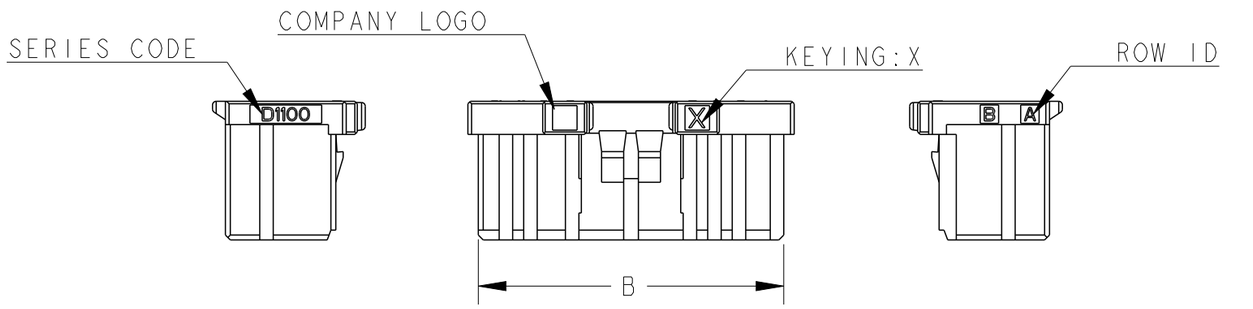

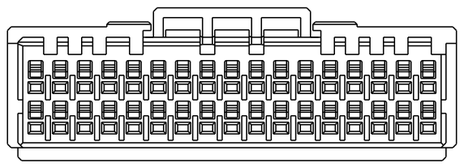

34POS(X-KEY):1-1827863-7



24POS(X-KEY):1-1827863-2

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: mm	TOLERANCES UNLESS OTHERWISE SPECIFIED: ±0.3,±5°
	0 PLC ± / 1 PLC ± / 2 PLC ± / 3 PLC ± / 4 PLC ± / ANGLES ±-
MATERIAL: SEE SHEET 1	FINISH: -

DWN T.KUDO	16MAR2005
CHK D.MITSUGI	23AUG2005
APVD D.MITSUGI	23AUG2005
PRODUCT SPEC	108-78268,78298
APPLICATION SPEC	114-5377
WEIGHT	-

TE Connectivity

NAME: DYNAMIC D1100 2.0mm PITCH REC HSG 22-40POS

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C-1827863	-

CUSTOMER DRAWING | SCALE 2:1 | SHEET 3 OF 3 | REV D

Extraction Tool for Dynamic 1000 Series Connector
ダイナミック ・1000 ・シリーズ・コネクタ用引抜工具
TOOL P/N: 1891526-1



Fig.1　引抜工具(Extraction Tool)

1. はじめに

本取扱説明書は、ダイナミック・1000・シリーズ・コンタクトをハウジングから引抜く際に使用する引抜工具（型番1891526-1）の取扱いについて説明するものです。

作業の前に必ずお読み下さい。

2. 適用製品

コンタクト型番	コンタクト型番
X-1827569-X	X-1903111-X
X-1827586-X	X-1903112-X
X-1827570-X	X-1903113-X
X-1827587-X	X-1903114-X
X-1871303-X	X-1903115-X
X-1871743-X	X-1903116-X
X-1827571-X	X-1903117-X
X-1827588-X	X-1903118-X
X-1871304-X	X-1903120-X
X-1871744-X	X-1903121-X
X-1827572-X	X-1903122-X
X-1827589-X	X-1903124-X
X-1871731-X	X-1903125-X
X-1871745-X	X-1903126-X

Xには、1桁の数字が入り型番を構成します。
ﾌﾟﾘﾌｨｯｸｽが 0(ｾﾞﾛ)の場合は省略されます。

1. INTRODUCTION

This Instruction Sheet explains the handling of the extraction tool (P/N1891526-1) used in Dynamic 1000 Series Contact is extracted from a housing.

READ THIS MANUAL CAREFULLY BEFORE OPERATION

2. APPLICABLE PRODUCTS

Contact　P/N	Contact　P/N
X-1827569-X	X-1903111-X
X-1827586-X	X-1903112-X
X-1827570-X	X-1903113-X
X-1827587-X	X-1903114-X
X-1871303-X	X-1903115-X
X-1871743-X	X-1903116-X
X-1827571-X	X-1903117-X
X-1827588-X	X-1903118-X
X-1871304-X	X-1903120-X
X-1871744-X	X-1903121-X
X-1827572-X	X-1903122-X
X-1827589-X	X-1903124-X
X-1871731-X	X-1903125-X
X-1871745-X	X-1903126-X

“X” means one numeric number.
When prefix number is 0(zero), prefix omitted.

©2017 Tyco Electronics Japan G.K.,
a TE Connectivity Ltd. Company
All Rights Reserved
TE logo is a trademark.
* Trademark　タイコエレクトロニクス ジャパン合同会社、TE Connectivity Ltd. グループ
Other products, logos, and company names might be trademarks of their respective owners.

ハウジング型番	ハウジング型番
X-1827862-X	X-1903129-X
X-1827863-X	X-1903130-X
X-1871057-X	X-1903131-X
X-1871465-X	
X-1827864-X	
X-1827579-X	
X-1903127-X	
X-1903128-X	

Housing P/N	Housing P/N
X-1827862-X	X-1903129-X
X-1827863-X	X-1903130-X
X-1871057-X	X-1903131-X
X-1871465-X	
X-1827864-X	
X-1827579-X	
X-1903127-X	
X-1903128-X	

3. 使用手順

以下の手順でコンタクトを引抜いて下さい。

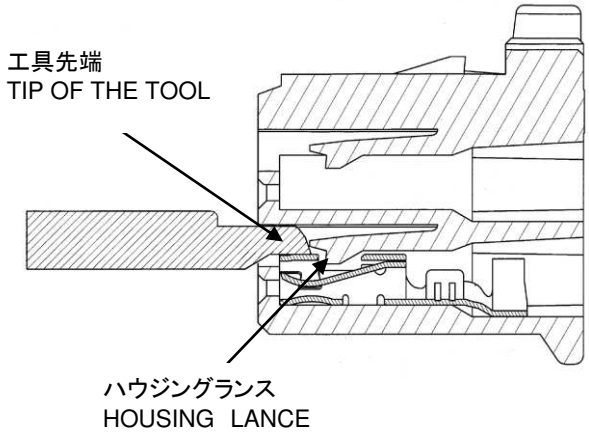


Fig2

［手順］

1） コネクタのかん合側から工具先端が突き当たるまで挿入してハウジングランスを上げてください。

2）その状態で電線を持ち、ｺﾝﾀｸﾄを引抜いて下さい。

注記


引抜いたｺﾝﾀｸﾄを再使用する場合はｺﾝﾀｸﾄに異常がないか確認し、異常があれば使用しないで下さい。

工具を挿入するだけでﾊｳｼﾞﾝｸﾞﾗﾝｽは解除されます。工具をこじるとﾗﾝｽや工具を傷めますのでこじらないで下さい。

端子ｶﾝｺﾞｳ部には絶対に挿入しないで下さい。
挿入した場合は必ず新しい端子と取り替えて下さい。

3.Extraction Procedure

Extract a contact in the following procedure.

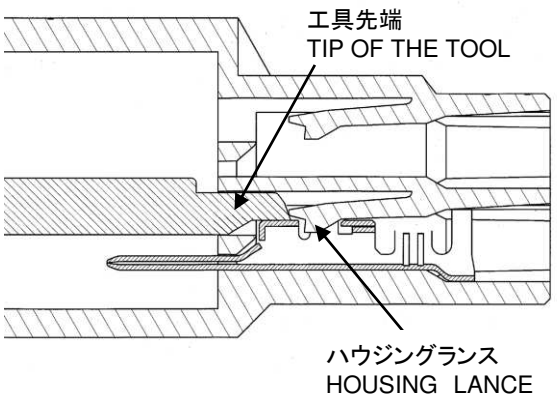

[Procedure]

1) Insert tool tip from mating side of the connector until it touches and moves the housing lance
2) Hold an electric wire in this condition and extract a contact

Notes

When a case of extracted contact, make sure that there no damage on the contact.
If the contact is damaged, DO NOT reuse.

Contact lance could be released by just inserting the extraction tool. Do not apply excess force when you push in the tool into housing. Housing lance and/or tool may be damaged.

Do not insert the extraction tool into contact. The contact may be damaged and must be replaced with new one.

この書類は当社により変更管理されており、必要に応じ変更されます。
最新の改訂に関しては当社本支店にお問い合わせ下さい。
This TE controlled document is subject to change. For latest revision call local TE representative.