

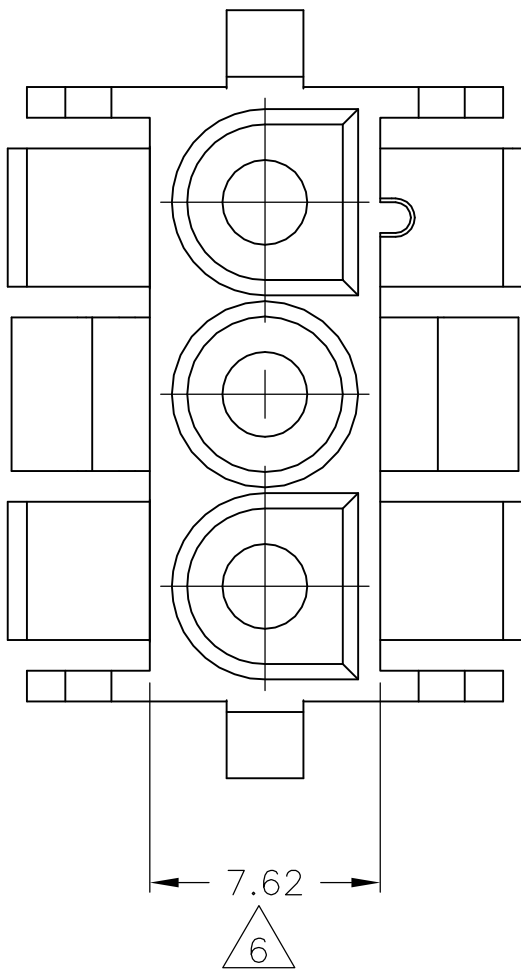


LOC	DIST	REVISIONS				
		F	LTR	DESCRIPTION	DATE	DWN APVD
		AN2	REVISED	PER ECO-11-004587	11MAR11	RK HMR
		AN3	REVISED	PER ECR-14-002588	06MAR14	AV KD



勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

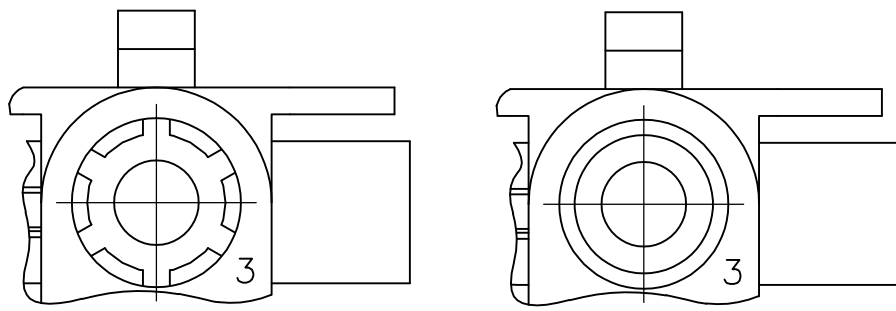

DETAIL A
OPTIONAL CONSTRUCTIONS


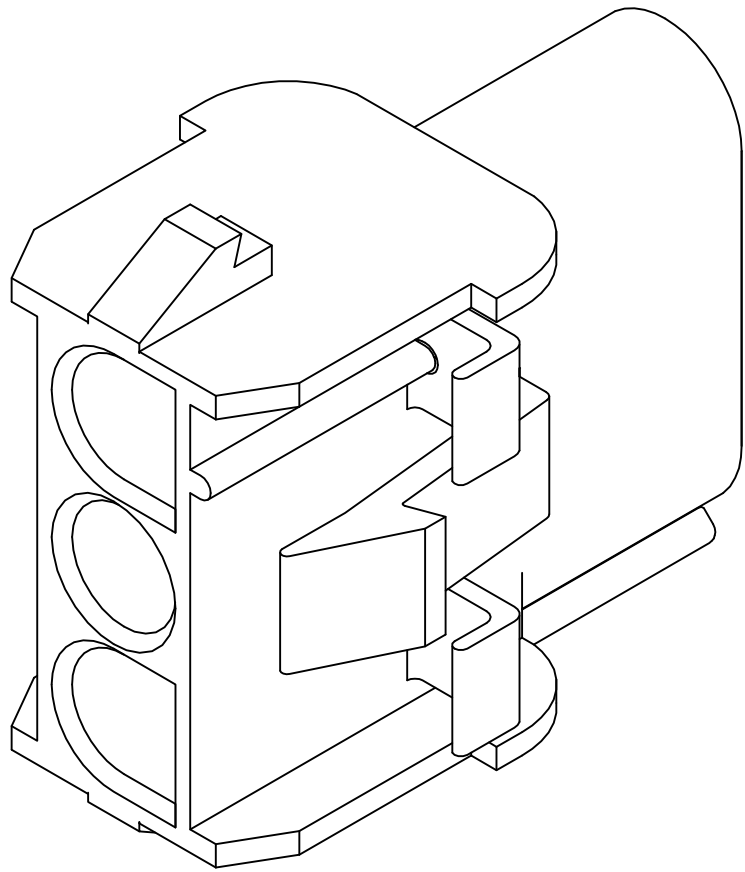


3-DIMENSIONAL MODEL
NTS

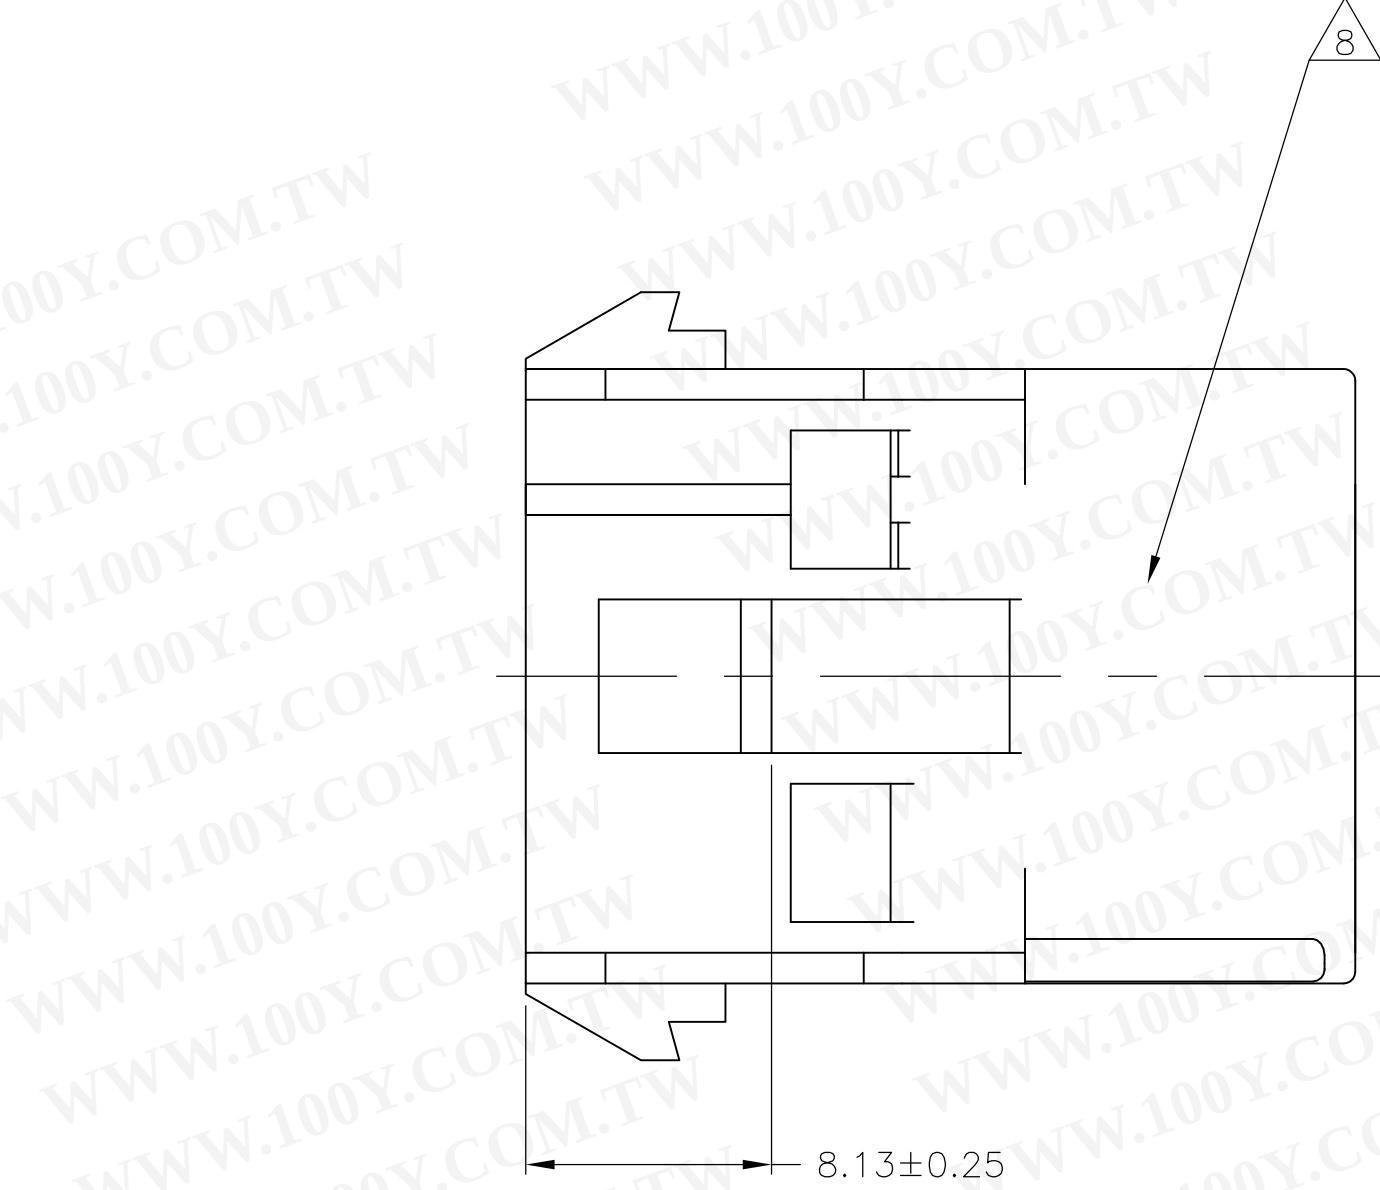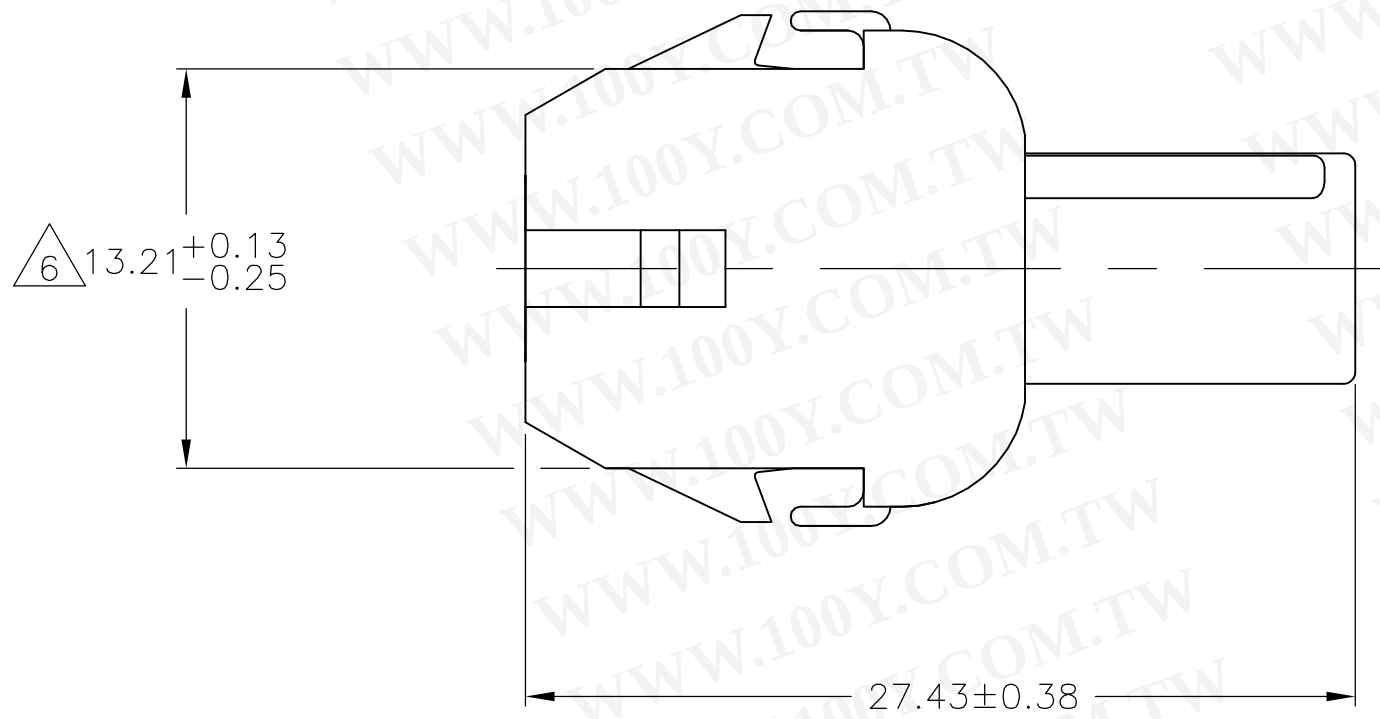

4.45	.175	27.43	1.080
2.79	.110	20.70	.815
2.54	.100	20.32	.800
2.41	.095	13.46	.530
2.29	.090	13.21	.520
0.76	.030	8.64	.340
0.38	.015	8.13	.320
0.25	.010	7.62	.300
0.13	.005	6.35	.250
MM	IN	MM	IN

CONVERSION TABLE

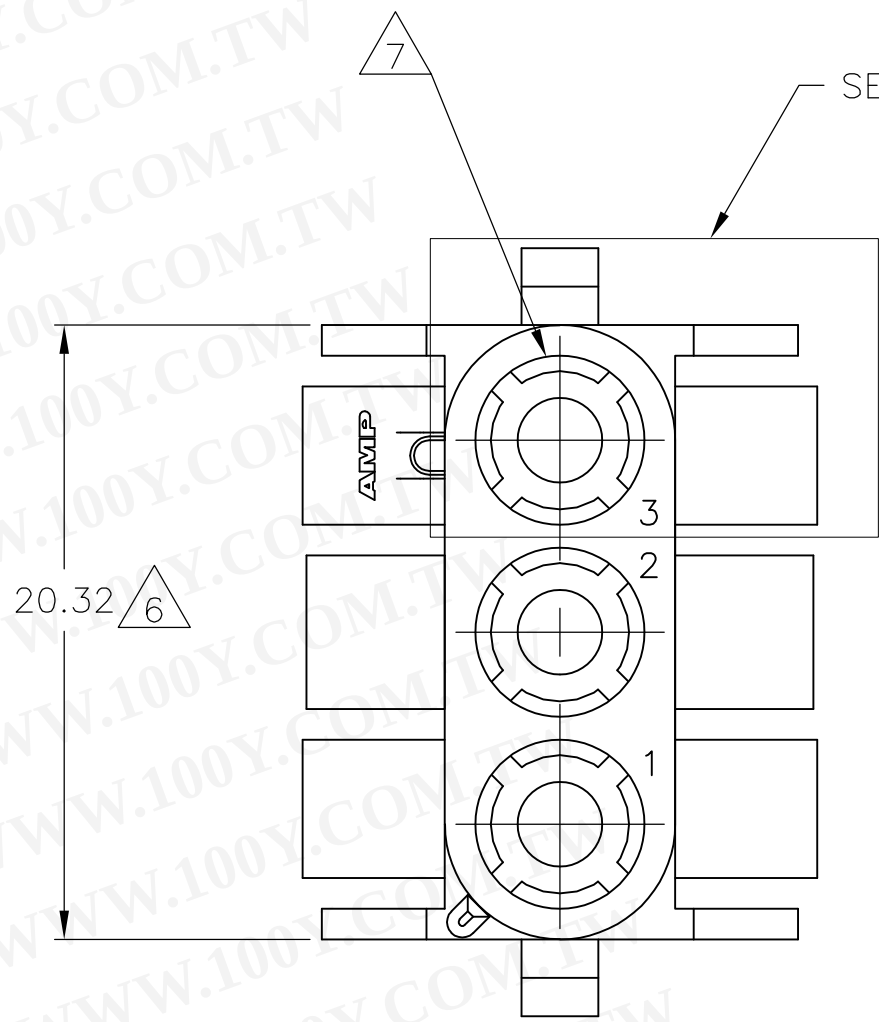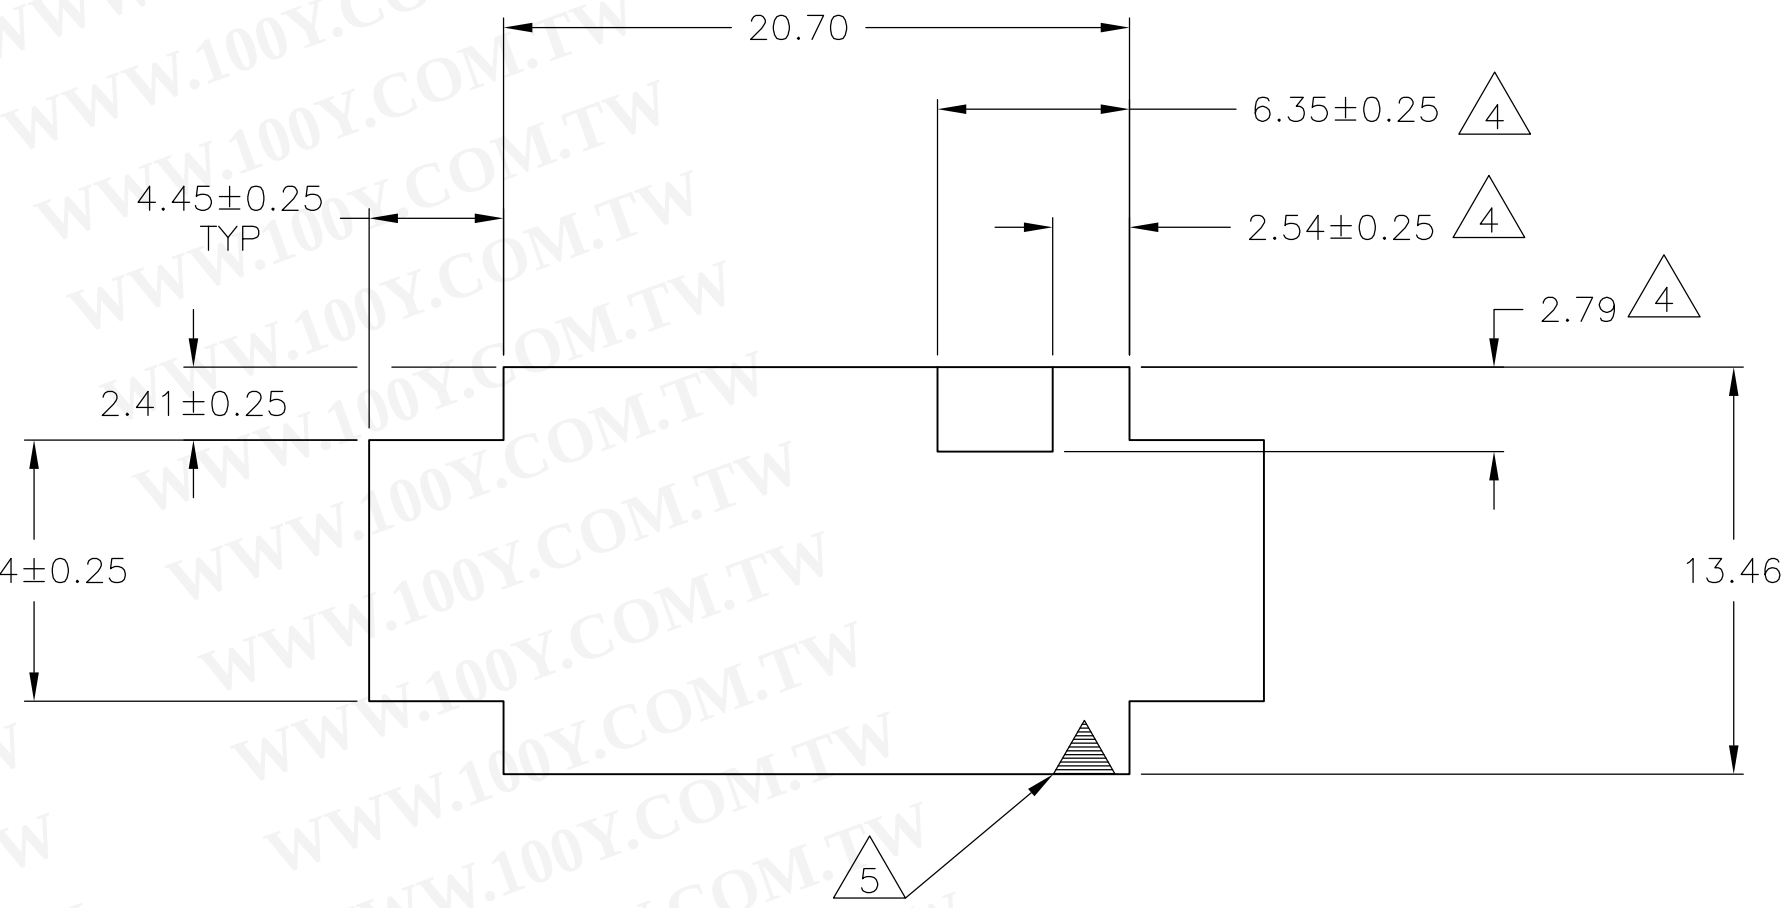

RECOMMENDED PANEL CUT OUT

1. MATES WITH APPROPRIATE UNIVERSAL MATE-N-LOK PLUG.
2. RECOMMENDED PANEL THICKNESS 0.76 - 2.29.
3. PANEL MUST BE PUNCHED SO THAT THE HOUSING ENTERS THE PANEL IN THE SAME DIRECTION AS THE PUNCH.
4. OPTIONAL FOR KEYING HOUSING IN PANEL.
5. CIRCUIT NUMBER 1 LOCATION.
6. DIMENSION INDICATED IS AS MOLDED. ADDITIONAL GROWTH DUE TO SUBSEQUENT MOISTURE ABSORPTION MAY OCCUR.
7. FOUR RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, NO RIBS OR SIX RIBS EQUALLY SPACED, NO SPECIFIC ORIENTATION, OPTIONAL.
8. UNDERWRITERS RECOGNIZED COMPONENT LOGO AND CSA CERTIFICATION LOGO TO BE LOCATED ONCE EACH ON SIDE OF HOUSING.
9. OBSOLETE PARTS: OBSOLETE CIS STREAMLINING PER D.RENAUD/D.SINISI

BLACK	1-480701-9
GRAY	1-480701-8
BLUE	1-480701-6
GREEN	1-480701-5
YELLOW	1-480701-4
ORANGE	1-480701-3
RED	1-480701-2
BROWN	1-480701-1
NATURAL	1-480701-0
COLOR	PART NO.

9 OBSOLETE





THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN K. WHITAKER 28JUL2004	NAME	
DIMENSIONS: mm		CHK S. RIDGILL 28JUL2004	CAP, 3 CIRCUIT, UNIVERSAL MATE-N-LOK(TM)	
TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± - 1 PLC ± 0.13 2 PLC ± - 3 PLC ± - 4 PLC ± - ANGLES ± 0°30'		APVD S. RIDGILL 28JUL2004	RESTRICTED TO	
MATERIAL NYLON, UL94V-2		FINISH -	A1 00779 480701	
CUSTOMER DRAWING		SCALE 4:1	SHEET 1 OF 2 REV. AN3	

METRIC

LOC	DIST	REVISIONS					
CM	00	P	LTR	DESCRIPTION	DATE	DWN	APVD
			—	SEE SHEET 1	—	—	—

勝特力材料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

1. STAMP NUMBERS 3.18 HIGH AT WIRE END OF HOUSING (12 POINT DAVID TYPE).
2. CHARACTERS TO BE STAMPED ON HOUSING IN A MANNER AS TO BE READ FROM WIRE END ONLY.
3. VIOLET, BLACK, BROWN AND BLUE COLORED BLOCKS TO BE STAMPED WITH WHITE CHARACTERS. ALL OTHER COLORED BLOCKS TO BE STAMPED WITH BLACK CHARACTERS.

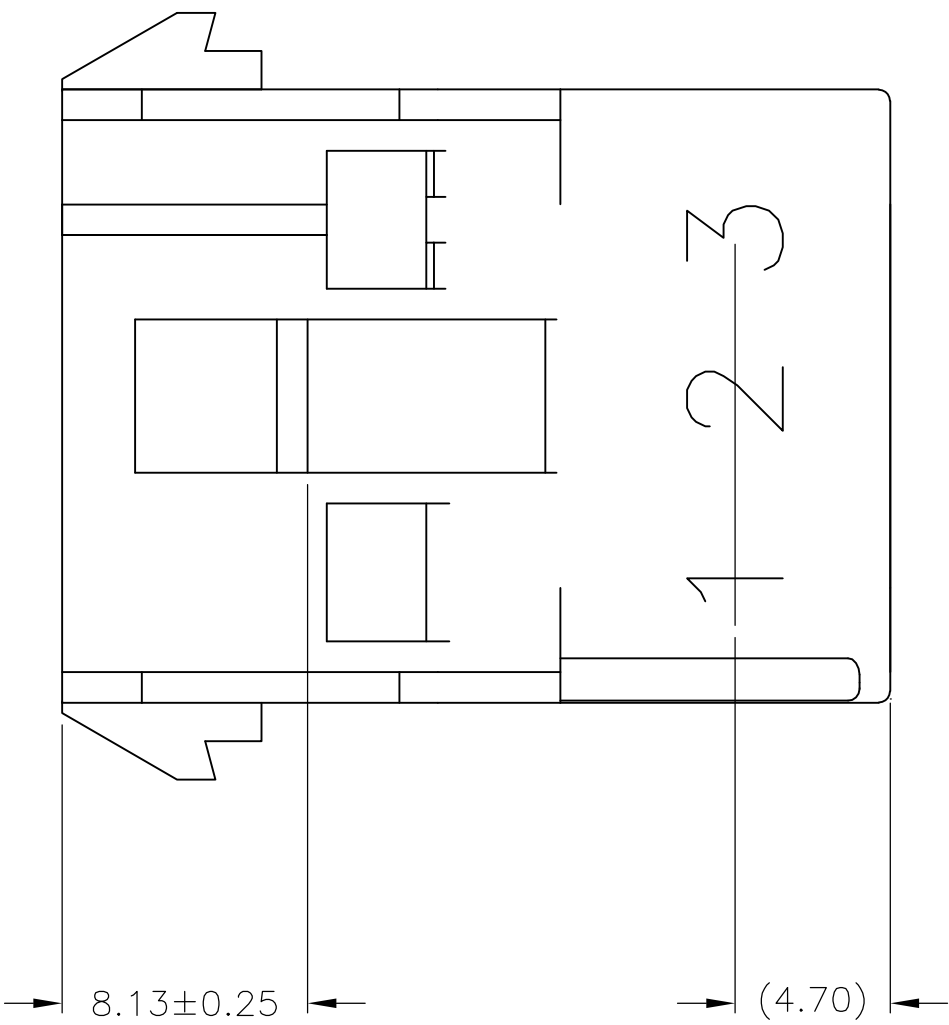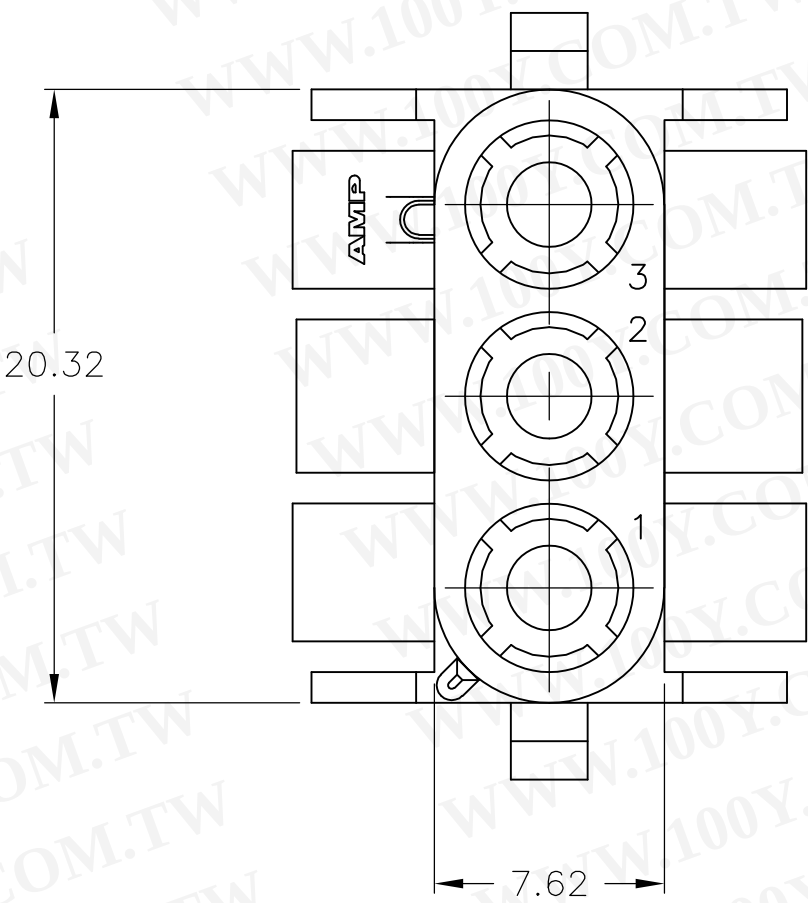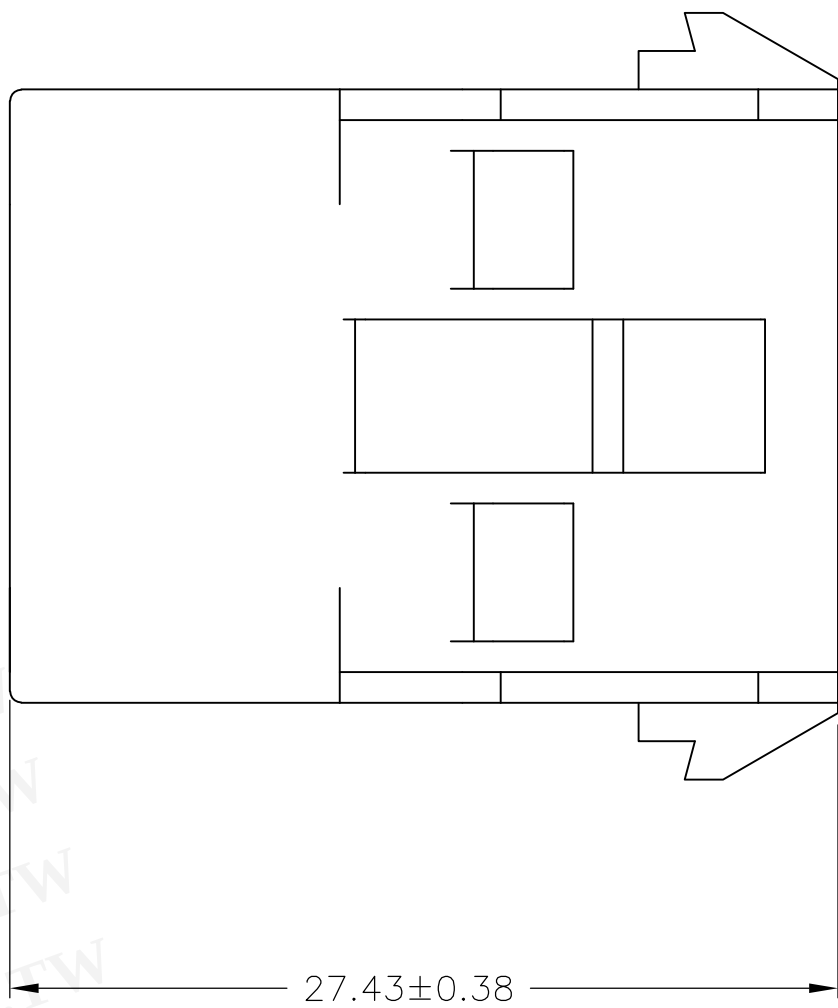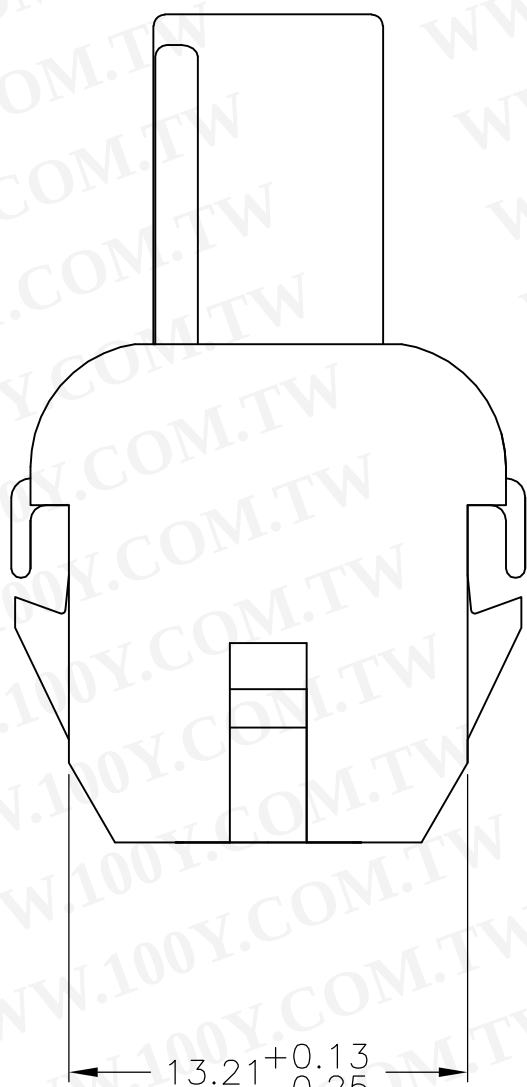

5.59	.220	-	-
4.70	.185	27.43	1.080
3.18	.125	20.32	.800
0.38	.015	13.21	.520
0.25	.010	8.13	.320
0.13	.005	7.62	.300
MM	IN	MM	IN
CONVERSION TABLE			

METRIC

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm

0. PLC
1. PLC
2. PLC
3. PLC
4. PLC
ANGLES
FINISH

± -
± -
± 0.13
± -
± -
± 0°30'

-

DWN
K. WHITAKER
28JUL2004

CHK
S. RIDGILL
28JUL2004

APVD
S. RIDGILL
28JUL2004

NAME

PRODUCT SPEC

APPLICATION SPEC

WEIGHT

CUSTOMER DRAWING

NATURAL
COLOR

2-480701-0
PART NO

TE Connectivity

CAP,
3 CIRCUIT,
UNIVERSAL MATE-N-LOK(TM)

SIZE
A1

CAGE CODE
00779

DRAWING NO
480701

RESTRICTED TO

SCALE
4:1

SHEET
2

OF
2

REV
AN2