

4

3

2

1

THIS DRAWING IS UNPUBLISHED.

RELEASED FOR PUBLICATION


COPYRIGHT

BY TYCO ELECTRONICS CORPORATION, ALL RIGHTS RESERVED.


LOC
DSDIST
—

REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
A		RELEASED	13MAY'09	SG	HG

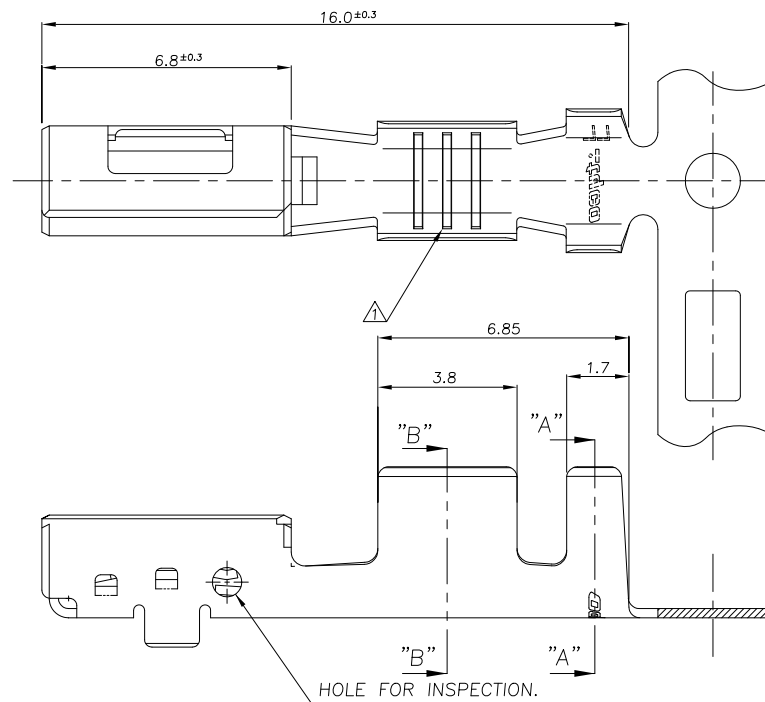


勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>



SECTION "B-B"



SECTION "A-A"

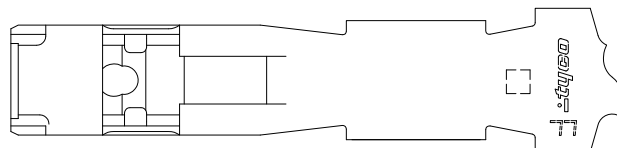

SECTION "C-C"

* NOTES

- △ THREE SERRATIONS CENTERED IN WIRE BARREL
 2 WIRE SIZE EQUIV AESSXF 2.5 sqmm.
 3 APPLIED HSG P/N : SEE 2/2 SHEET

PRE-TINNED		CuNiSi Alloy 0.25THK		1897598-1	
FINISH		MATERIAL		PART NUMBER	
<small>THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE, AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.</small>		DWN SG OH CHK YD LEE APVD HG CHO PRODUCT SPEC APPLICATION SPEC 114-61014 WEIGHT CUSTOMER DRAWING		NAME Tyco Electronics AMP KOREA. Kyungsan, Korea 090 III MLC RECEPTACLE(LL) SIZE CAGE CODE DRAWING NO A2 00779 C= 1 8 9 7 5 9 8 SCALE 10/1 SHEET 1 OF 2 REV A	
DIMENSIONS: MM 		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 <XX<10 ± 0.2 10<XX<30 ± 0.25 30<XX ± 0.3 ANGLES ± 3°			
MATERIAL		FINISH			

4

3

2

1

THIS DRAWING IS UNPUBLISHED.	RELEASED FOR PUBLICATION
COPYRIGHT BY TYCO ELECTRONICS CORPORATION, ALL RIGHTS RESERVED.	

LOC	DIST	REVISIONS				
DS	-	P	LTR	DESCRIPTION	DATE	DWN
				SEE SHEET 1 OF 2		APVD

NO	DESCRIPTION	POS	P/N
1	090 III 2P PLUG ASS'Y	2P	936224
2	090 III 4P PLUG ASS'Y	4P	936227
3	090 III 6P PLUG ASS'Y(1ROW)	6P	936230
4	090 III 6P PLUG ASS'Y(2ROW)	6P	936268
5	090 III 6P PLUG ASS'Y(FOG S/W)	6P	1743184
6	090 III 8P PLUG ASS'Y	8P	936233
7	090 III 10P PLUG ASS'Y	10P	936092
8	090 III 12P PLUG ASS'Y	12P	936196
9	090 III 14P PLUG ASS'Y	14P	936199
10	090 III 16P PLUG ASS'Y	16P	936201
11	090 III 18P PLUG ASS'Y	18P	936204
12	090 III 20P PLUG ASS'Y	20P	936095
13	090 III 22P PLUG ASS'Y	22P	936151
14	090 III 26P PLUG ASS'Y	26P	936098
15	090/SPT HYB 2P PLUG ASS'Y	2P	936568
16	090/SPT HYB 4P PLUG ASS'Y	4P	936444
17	090/SPT HYB 10P PLUG ASS'Y	10P	936363
18	090/SPT HYB 12P PLUG ASS'Y	12P	936372
19	090/SPT HYB 14P PLUG ASS'Y	14P	368451
20	090/SPT HYB 16P PLUG ASS'Y	16P	368454
21	090/SPT HYB 18P PLUG ASS'Y	18P	368497
22	090/SPT HYB 20P PLUG ASS'Y	20P	368457
23	090/SPT HYB 32P PLUG ASS'Y	32P	936321
24	090/SPT HYB 40P PLUG ASS'Y	40P	936352
25	090/SPT HYB 76P PLUG ASS'Y	76P	936195
26	040/090/JPT HYBRID CONNECTOR 39P PLUG ASS'Y	39P	936405
27	040/090/JPT HYBRID CONNECTOR PLUG 20P	20P	936517
28	090 25P PLUG FOR DOOR TO BODY	25P	936369
29	090 30P PLUG FOR DOOR TO BODY	30P	368488
30	090 33P PLUG FOR DOOR TO BODY	33P	936283
31	040/090 III HYBRID 14P PLUG	14P	1743247
32	090 III PLUG ASS'Y FOR 62P CONN	62P	1743346
33	090/250 HYB 40P PLUG HSG ASS'Y	40P	936063
34	090/250/MCP 9.5 HYBRID 82P PLUG ASS'Y	82P	1743033
35	090/250 HYBRID 92P PLUG ASS'Y	92P	1743037
36	090/250 HYBRID 56P PLUG ASS'Y	56P	1743029
37	PLUG ASSEMBLY CONNECTOR FOR HYB 42P(.040/.090)	42P	1743098
38	PLUG ASSEMBLY CONNECTOR FOR HYB 39P(.040/.090/.250)	39P	1743089
39	040/090 HYBRID 39P PLUG ASSY FOR LIF CONNECTOR(LHD)	39P	1743531
40	040/090/MCP HYB 42P PLUG FOR ASSY DOOR BODY	42P	1743680

FINISH		MATERIAL		PART NUMBER	
THIS DRAWING IS A CONTROLLED DOCUMENT FOR TYCO ELECTRONICS CORPORATION. IT IS SUBJECT TO CHANGE, AND THE CONTROLLING ENGINEERING ORGANIZATION SHOULD BE CONTACTED FOR THE LATEST REVISION.		DWN		AMP KOREA, Kyungsan, Korea	
DIMENSIONS: MM		CHK		NAME	
TOLERANCES, UNLESS OTHERWISE SPECIFIED: 0 <XX<10 ± 0.2 10<XX<30 ± 0.25 30<XX ± 0.3 ANGLES ± 3°		APVD		090 III MLC RECEPTACLE(LL)	
MATERIAL		PRODUCT SPEC		SIZE	
-		APPLICATION SPEC		CAGE CODE	
FINISH		WEIGHT		DRAWING NO	
-		CUSTOMER DRAWING		A200779	
		SCALE		RESTRICTED TO	
		10/1		-	
		SHEET		2	
		OF		2	
		REV		A	

.090 TAB & RECEPTACLE CONTACTS (Un-sealed and Sealed Type)

- **NOTE** All numerical values are in metric units. Dimensions are in millimeters and have a tolerance of $\pm 0.13\text{mm}$ unless otherwise specified. Angles have a tolerance of $\pm 2^\circ$.

1. INTRODUCTION

This specification covers the requirements for application of TE 090 MLC Tab and Receptacle Contacts. The contacts are precision Formed, strip feed, for machine application. The contacts have been designed for commercially available pin and socket housings with locks that engage the contact fins.

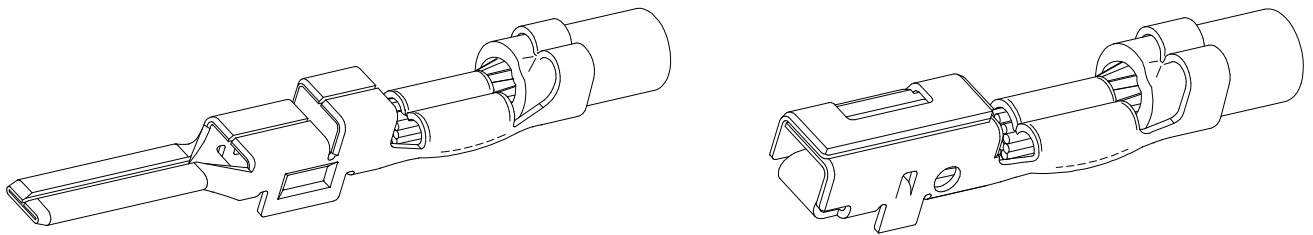


Figure 1

2. REFERENCE MATERIAL

2.1. Customer Drawing

-. 090 II Un-sealed Tab:	368086, 368087, 368088, 1897752
-. 090 II Un-sealed Rec:	368083, 368084, 368085
-. 090 III Un-sealed Rec:	1743654, 1743655, 1743656, 1897598, 1897753
-. 090 II Sealed Tab:	936260, 936261, 936262
-. 090 II Sealed Rec:	368287, 368288, 368289

In the case of a conflict between this document and the customer drawing, the customer drawing takes precedence.

2.2. Product Specification for .090 II Un-sealed Types; 108-61021



3. REQUIREMENTS

3.1. Material

Recep.: CuNiSi, Brass

Tab: Brass

Refer to customer drawing for detailed information.

3.2. Storage

The pin and socket contacts should remain in the shipping containers and on the reels until ready for use.

The coiled reels should be stored horizontally to prevent deformation during storage that could keep proper feeding through the applicator.

3.3. Crimped Contact Criteria

A. Crimp Height

The crimp applied to the wire barrel portion of the contact is the most compressed area and is most critical in assuring optimum electrical and mechanical performance of the crimped contact.

B. Bellmouths

The front and rear bellmouths are caused by the extrusion of metal during crimping and must be within the range specified in Figure 2.

C. Cutoff Tab and Burr

The cutoff tab and burr resulting from the contact being cut from the carrier strip must be within limits shown to allow the contact to be fully inserted and seated in the housing. See Figure 2.

D. Wire Barrel Flash

The wire barrel flash at the bottom of the wire barrel results from applied crimp pressure and must be within the dimension provided in Figure 2.

E. Insulation Barrel Crimp

The insulation barrel shall grip the insulation firmly without cutting into it. Care must be taken to prevent cutting, nicking, or scraping of the insulation.

F. Crimp Tensile Strength

Crimped contacts should hold firmly to the wire and have a pull-test tensile value meeting that specified in the chart in Figure 2.

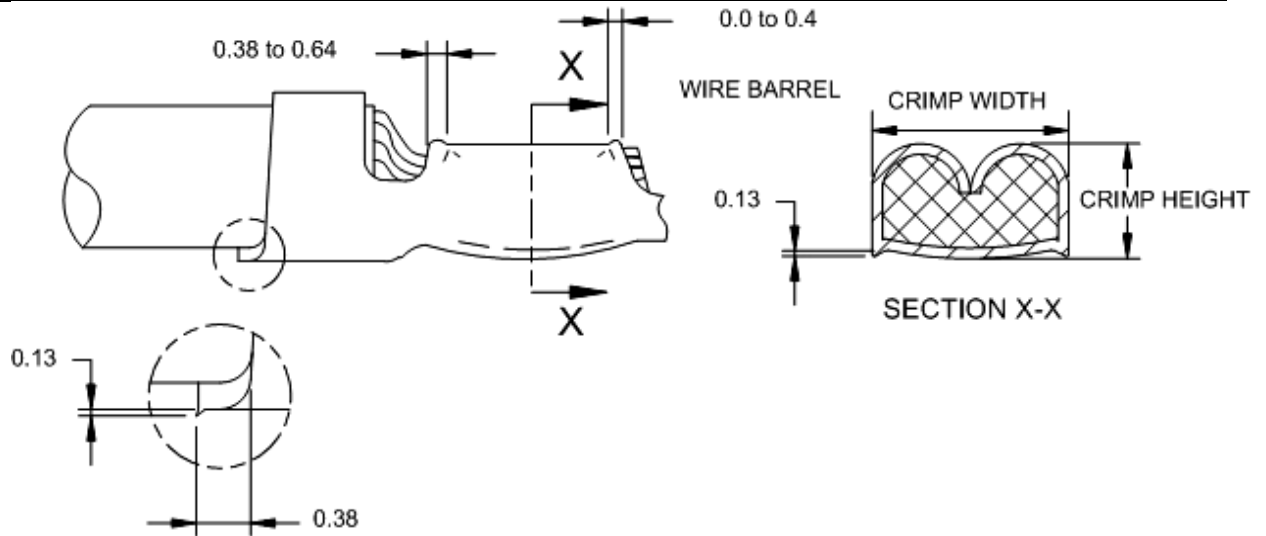


Figure 2

G. Wire Location

After Crimping the wire and insulation must be visible in the transition area between the wire and Insulation barrels. The wire end must be within the limit provided in Figure 3.

H. Wire Barrel Seam

The wire barrel seam shall be completely closed with no wire strands protruding from it. Figure 3

I. Twist or Roll

The crimped wire and insulation barrels must be aligned with the un-crimped portion of the contact to within the limit shown in Figure 3

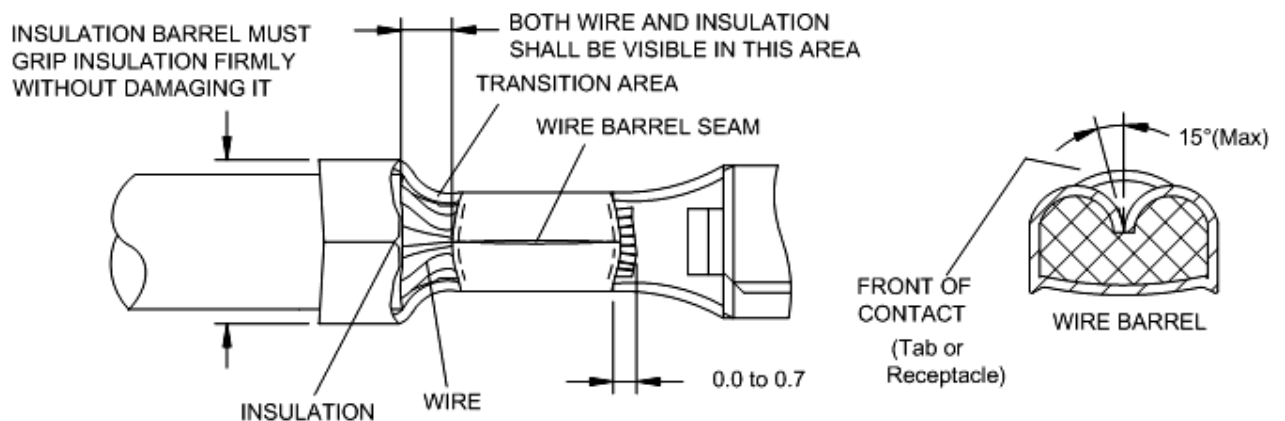


Figure 3

J. Straightness

The force applied during crimping may cause some bending between the crimped wire barrel and the un-crimped tab or receptacle portion of the contact.

1) Up and Down

The crimped contact, including cutoff tab and burr, shall not be bent above or below the datum line more than the amount shown in Figure 4.

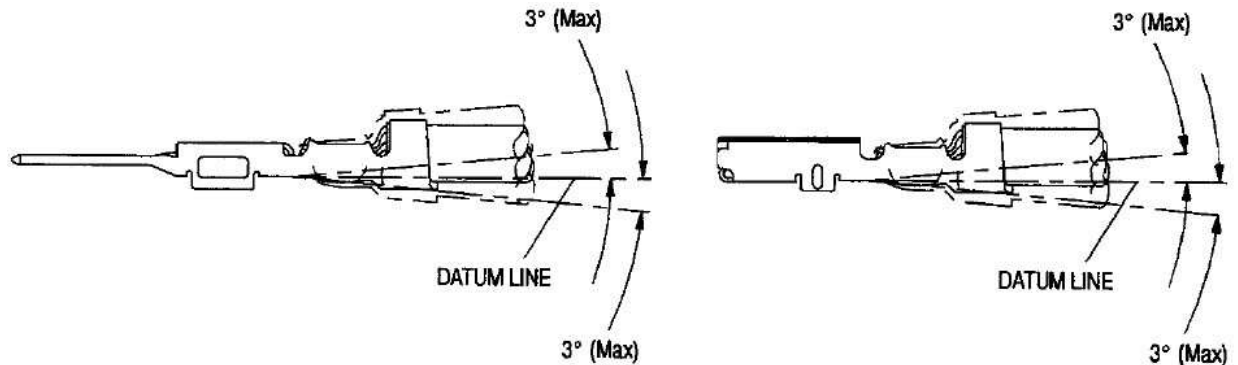


Figure 4

2) SIDE to SIDE

The side-to-side bending of the contact may not exceed the limits provided in Figure 5.


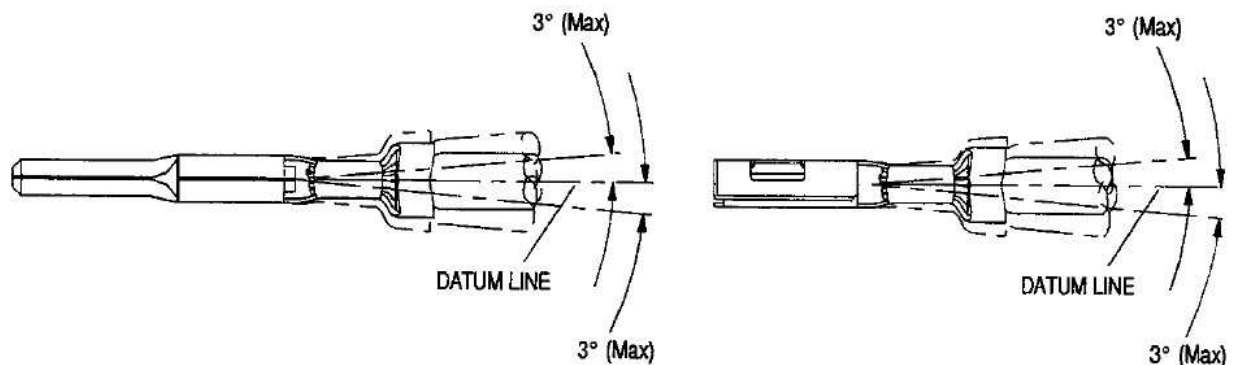


Figure 5

K. Position of the single wire seal on the wire (Sealed Type only)

The end of the wire insulation must at least be flush with the front face of the seal and may extend not more than 1.0mm beyond this.

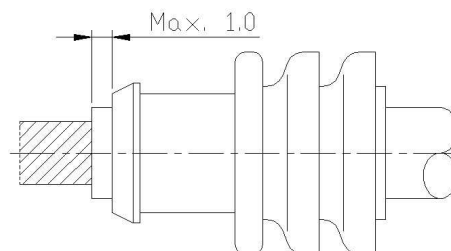

4. VISUAL AID

The following illustrations are to be used by production personnel to ensure properly applied product. The views suggest requirements for good terminations. Applications that appear visually incorrect should be inspected using the information in the main body of this document.

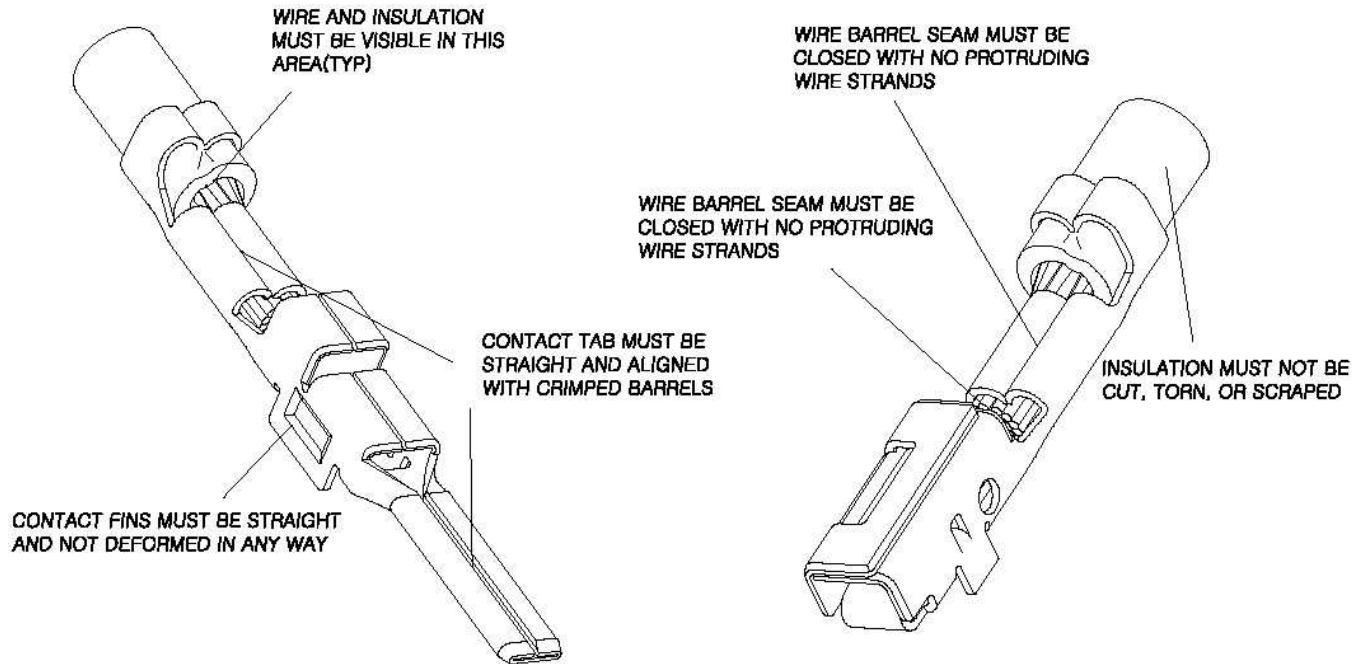


Figure 6

6. Crimp Data:

1) Application Crimp: 090 II Tab & Receptacle (Un-sealed Type)

Contact P/N	Wire Range Nominal Size	Insulation Dia. Range	Wire Strip Length (mm)	Wire Barrel Crimp		Ins. Barrel Crimp Width (mm)	Crimp Tensile Strength (kgf) (min.)
				Width (mm) ^{A)}	Height (mm)		
368088	CAVUS 0.3	1.4 ~ 1.5	4.3	1.8 "F"	1.0 ~ 1.1	2.8 "F"	6
368085			4.3	1.8 "F"	0.75 ~ 0.85	2.8 "F"	6
368088	AVS 0.5	2.0 ~ 2.1	4.3	1.8 "F"	1.04 ~ 1.14	2.8 "F"	9
368085			4.3	1.8 "F"	0.84 ~ 0.94	2.8 "F"	9
368087	CAVUS 0.85	1.8 ~ 1.9	5.3	2.3 "F"	1.15 ~ 1.25	3.05 "F"	13
368084			5.3	2.3 "F"	0.98 ~ 1.08	3.05 "F"	13
368087	AVS 1.25	2.5 ~ 2.6	5.3	2.3 "F"	1.3 ~ 1.4	3.05 "F"	17
368084			5.3	2.3 "F"	1.2 ~ 1.3	3.05 "F"	17
368086	AVSS 2.0	2.6 ~ 2.7	5.3	2.6 "F"	1.62 ~ 1.72	3.05 "F"	20
368083			5.3	2.3 "F"	1.5 ~ 1.6	3.05 "F"	20
368086	AESSX 2.5F	2.9 ~ 3.1	5.3	2.8 "F"	1.77 ~ 1.87	3.05 "F"	25
1897752	CHFUS 0.22	1.0 ~ 1.05	4.0	1.57 "F"	0.89 ±0.03	2.28 "F"	4

*Note: (1) The width of wire barrel is not the actual width, but the width of wire crimper slot.

(2) Control the width of wire barrel within A)+0.2mm after crimp.

2) Application Crimp: 090 III Receptacle (Un-sealed Type)

Contact P/N	Wire Range Nominal Size	Calculated Cross Section Area (mm ²)	Wire Strip Length (mm)	Wire Barrel Crimp		Ins. Barrel Crimp Width (mm)	Crimp Tensile Strength (kgf) (min.)
				Width (mm) ^{A)}	Height (mm)		
1743654	0.3 AVSF, AVXF, AEXF, AVSS, AVX, AEX, AVSSF	0.3054	4.3	1.4 "F"	0.92 ±0.03	2.29 "F"	6
		0.3716			0.96 ±0.03		6
		0.382			0.96 ±0.03		6
	0.35 TXL, FLR	0.324			0.92 ±0.03		7
		0.4156			0.98 ±0.03		7
	0.5 FLX, FLY, TXL, AVSF, AEXF, FLR, AVSSF, AVSS, AEX, CAVS	0.5207			1.04 ±0.03		9
		0.5089			1.04 ±0.03		9
		0.5389			1.04 ±0.03		9
		0.563			1.07 ±0.03		9
1743655	0.75 FLX, FLY, AVSF, AVXF, AEXF, FLR, FLK	0.754	4.3	2.03 "F"	1.11 ±0.05	3.05 "F"	11
		0.7634			1.11 ±0.05		11
		0.8313			1.14 ±0.05		11
	0.8 TXL, AVS	0.760			1.11 ±0.05		11
		0.7757			1.11 ±0.05		11
		0.8042			1.11 ±0.05		11
	0.85 AVSS, AVSSF, AVSF, AVXF, AEXF, AVS, AEX, CAVS	0.8597			1.14 ±0.05		13
		0.8652			1.14 ±0.05		13
		0.8847			1.14 ±0.05		13
	1.0 FLY, FLX, AVS, FLR, FLK, TXL	1.0053			1.21 ±0.05		13
		1.045			1.21 ±0.05		13
		1.1084			1.25 ±0.05		13
		1.13			1.25 ±0.05		13
	1.25 AVSS, AVSF, AVXF, AEXF, AVSSF, AEX, CAVS	1.255			1.31 ±0.05		17
		1.272			1.31 ±0.05		17
		1.286			1.31 ±0.05		17
1743656	1.5 AVS, FLR, FLK	1.528	4.5	2.29 "F"	1.42 ±0.05	3.05 "F"	17
		1.699			1.48 ±0.05		17
	2.0 TXL, FLY, AVSS, AVSSF	1.85			1.54 ±0.05		20
		1.19644			1.58 ±0.05		20
1897598	AESSX 2.5F	2.6546	4.8	2.54 "F"	1.95 ±0.05	3.05 "F"	25
1897753	CHFUS 0.22	0.219	4.0	1.4 "F"	0.83 ±0.03	1.4 "F"	4

* Note: (1) The width of wire barrel is not the actual width, but the width of wire crimper slot.

(2) Control the width of wire barrel within A)+0.2mm after crimp.

(3) Check the Calculated Cross Section Area per wire.

3) Application Crimp: 090 II Tab & Receptacle (Selaed Type)

Contact P/N	Wire Range Nominal Size	Insulation Dia. Range	Wire Strip Length (mm)	Wire Barrel Crimp		Ins. Barrel Crimp	Applicable SWS P/N
				Width (mm) ^{A)}	Height (mm)	Width (mm)	
936260	AVSS 0.3 CAVUS 0.3	1.4 ~ 1.5	4	1.78 "F"	1.05±0.05	3.9 "O"	828904-1
368287			4	1.78 "F"	0.85 ±0.05	3.9 "O"	828904-1
936260	AVS 0.5	2.0 ~ 2.1	4	1.78 "F"	1.13±0.05	3.9 "O"	828904-1
368287			4	1.78 "F"	0.94 ±0.05	3.9 "O"	828904-1
936261	AVSS 0.85 CAVUS 0.85	1.8 ~ 1.9	4	2.28 "F"	1.25±0.05	4.2 "O"	828904-1
368288			4	2.28 "F"	1.07±0.05	4.2 "O"	828904-1
936261	AVS 1.25	2.5 ~ 2.6	4	2.28 "F"	1.41±0.05	4.2 "O"	828905-1
368288			4	2.28 "F"	1.19±0.05	4.2 "O"	828905-1
936262	AVSS 2.0	2.6 ~ 2.7	4	2.79 "F"	1.62±0.05	4.2 "O"	828905-1
368289			4	2.54 "F"	1.52±0.05	4.2 "O"	828905-1
936262	AESSXF 2.5	2.9 ~ 3.1	4	2.79 "F"	1.81±0.05	4.2 "O"	368299-1

*Note: (1) The width of wire barrel is not the actual width, but the width of wire crimper slot.

(2) Control the width of wire barrel within A)+0.2mm after crimp.



Application Specification

114-61004

7. Revision History

F1	REVISED (1897598 Crimp spec, Page 7)	14.APR.'16
F	REVISED (SEALED TYPE CRIMP DATA UPDATED)	21.NOV.'11
E	REVISED (CRIMP DATA UPDATED)	18.SEP.'09
D	REVISED (ADDED NEW WIRE SIZE 2.5 AND MODIFY THE ERROR)	
C	REVISED (CHANGED FRONT BELLMOUTH TO 0~0.4)	-
B	REVISED (CHANGED TENSILE STRENGTH 0.3SQ)	-
A	REVISED (UPDATE TO CORRECT FORMAT)	-
O	RELEASED	-
REV.	REVISION RECORD	DATE