

THIS DRAWING IS A CONTROLLED DOCUMENT.


REVISIONS
変更

P	LTR	DESCRIPTION	DATE	DWN	APVD
	C	REVISED PER ECR-22-142637	16JUN2022	RI	TS


勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
http://www.100y.com.tw

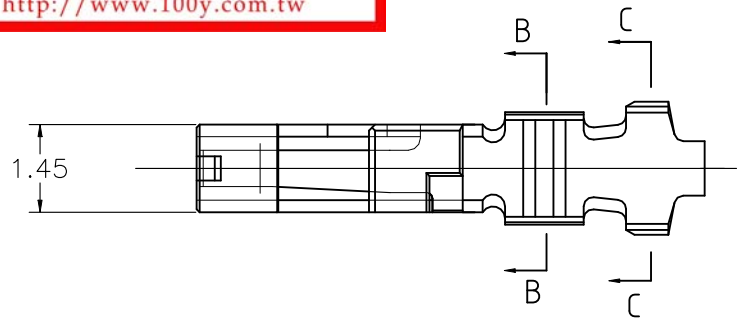


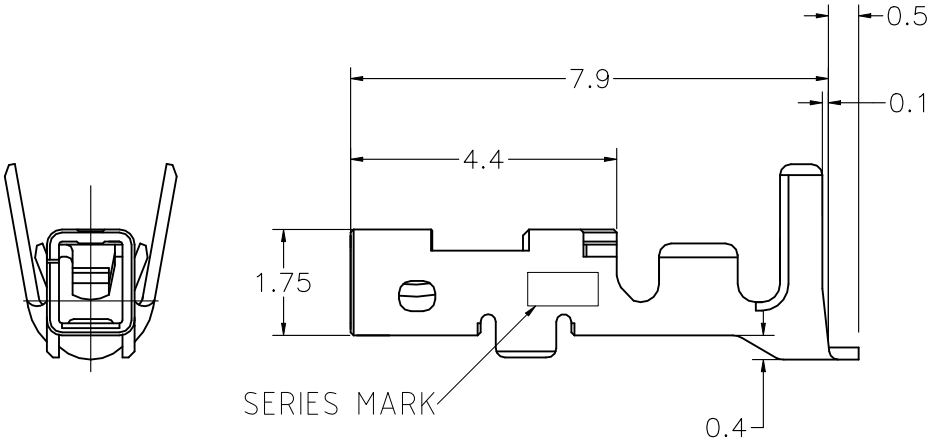



SECT. B-B

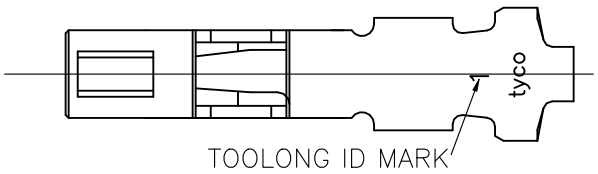



SECT. C-C

1. GENERAL TOLERANCE : ±0.3, ±3°
2. APPLICATION REC-HSG IS APPLIED TO THE PRODUCT OF 2.5mm PITCH OR MORE OF DYNAMIC D1000SERIES. 2.0mmPITCH CANNOT BE USED.
3. OVER Ni PL : 1.27um MIN
   Au PL(CONTACT AREA): 0.38um MIN
4. OVER Ni PL : 1.27um MIN
   Au PL(CONTACT AREA): 0.2um MIN

D L 4	1827588-4 4
D L	1827588-2 3
SERIES MARK	PART NUMBER

TE Connectivity. All Rights Reserved.

DIMENSIONS:
単位： 粍
mm

TOLERANCES UNLESS OTHERWISE SPECIFIED:
一般公差

0 PLC	± –
1 PLC	± –
2 PLC	± –
3 PLC	± –
4 PLC	± –
ANGLES	± –

DWN T.KUDO 23MAR2005
CHK D.MITSUGI 23MAR2005
APVD D.MITSUGI 23MAR2005
PRODUCT SPEC 製品規格 108-78268
APPLICATION SPEC 取付適用規格 114-5377
WEIGHT –

MATERIAL 材料 COPPER ALLOY
FINISH 仕上 –

TE Connectivity

NAME 名称 DYNAMIC D1000 SERIES REC CONTACT (L TYPE)(L/P)

SIZE	CAGE CODE	DRAWING NO 番号	RESTRICTED TO
A4	00779	C- 1827588	–

CUSTOMER DRAWING

SCALE 尺度 8:1 SHEET 1 OF 1 REV C

Crimping requirements for DYNAMIC 1000 Series contacts

1. SCOPE

This Application specification covers the crimping requirements for DYNAMIC 1000 Series contacts

2. APPLICABLE PRODUCT PART NUMBER

See Fig.1.

Contact Type	Size	Contact Part number L/P: Loose Piece		Plating Finish	Wire Size (AWG# REF) [mm2]	Insulation Diameter [mm]
Receptacle Contact	S	1827569-2/ *- 2367817-1【b】	: Reel	Gold Plating	0.05～0.10 (#30～#28)	φ0.60～φ1.20
		1827586-2/ *-2367818-1【b】	: L/P			
	M	1827570-2/ *-2367817-2【b】	: Reel	Gold Plating	0.08～0.37 (#28～#22)	φ1.08～φ1.60
		1827587-2/ *-2367818-2【b】	: L/P			
		1939991-2	: Reel	Gold 0.76Plating		
		1939992-2	: L/P			
		1871303-1	: Reel	Tin Plating		
		1871743-1	: L/P			
	L 【a】	1827571-2	: Reel	Gold Plating	0.08～0.37 (#28～#22)	φ1.08～φ1.90
		1827588-2	: L/P			
		1871304-1	: Reel	Tin Plating		
		1871744-1	: L/P			
	2L 【a】	1827572-2	: Reel	Gold Plating	0.34～0.87 (#22～#18)	φ1.40～φ2.20
		1827589-2	: L/P			
		1871731-1	: Reel	Tin Plating		
		1871745-1	: L/P			
	S	1903111-2/ *-2367819-1【b】	: Reel	Gold Plating	0.05～0.10 (#30～#28)	φ0.60～φ1.20
		1903115-2/ *-2367820-1【b】	: L/P			
	M	1903112-2/ *-2367819-2【b】	: Reel	Gold Plating	0.08～0.37 (#28～#22)	φ1.08～φ1.60
		1903116-2/ *-2367820-2【b】	: L/P			
		1903120-1	: Reel	Tin Plating		
		1903124-1	: L/P			
	L 【a】	1903113-2	: Reel	Gold Plating	0.08～0.37 (#28～#22)	φ1.08～φ1.90
		1903117-2	: L/P			
		1903121-1	: Reel	Tin Plating		
		1903125-1	: L/P			
	2L 【a】	1903114-2	: Reel	Gold Plating	0.34～0.87 (#22～#18)	φ1.40～φ2.20
		1903118-2	: L/P			
		1903122-1	: Reel	Tin Plating		
		1903126-1	: L/P			

Fig.1

【a】. L and 2L size are not applicable for D1100 (2.0mm Pitch) housings.

【b】. D1000 Slim Contact. It is applicable for D1000 slim housings.

© 2024 TE Connectivity Ltd. family of companies.
All Rights Reserved.
| Indicates Change

*Trademark. TE Connectivity, TE connectivity (logo), and TE (logo) are trademarks. Other logos, product, and/or company names may be trademarks of their respective owners.


3. Crimping REQUIREMENTS

See Fig.2 and Fig.3

NO.	Check Item	Specified Requirements	NO.	Check Item	Specified Requirements
①	Wire Stripping Length	2mm±0.3	⑥	Twisting	3˚Max
②	Cut-Off Tab Length	0.25mm Max	⑦	Rolling	5˚Max
③	Rear Bell mouth Length	0.1～0.3mm	⑧	Wire-End Protrusion Length	0.1～0.65mm
④	Bend-Up	3˚Max	⑨【c】	Insulation Barrel Width	See Fig.4, 5
⑤	Bend-Down	3˚Max	⑩【c】	Insulation Barrel Height	See Fig.4, 5

【c】. Insulation barrel crimping dimension ⑨ and ⑩ should be controlled under Fig.5 and Fig.6 not to interfere housings.

Fig 2

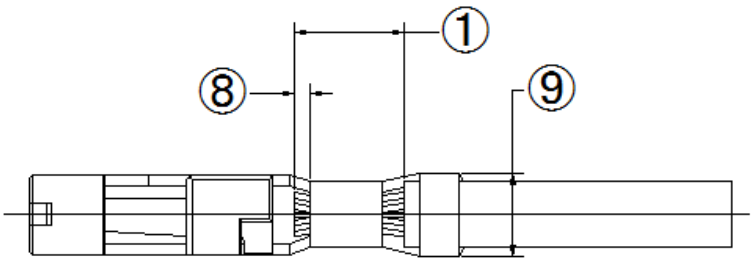

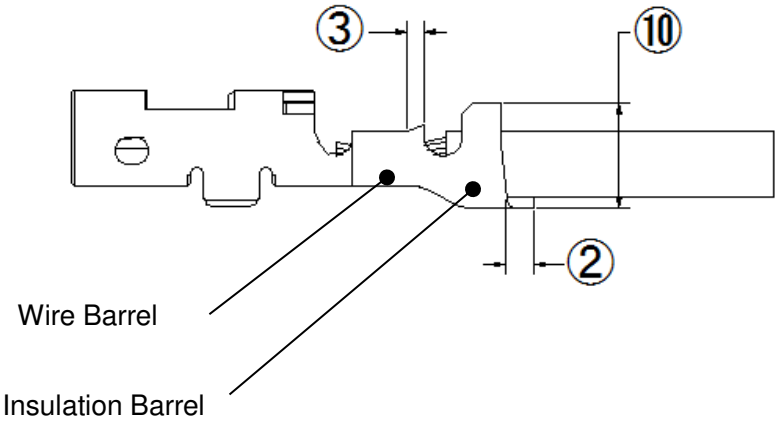


Fig 3

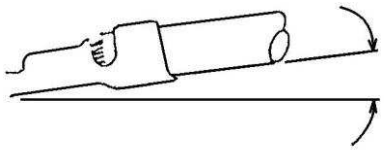
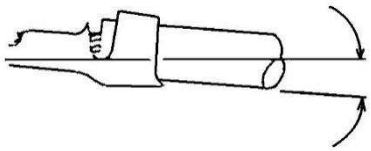




④ Bend-Up  Max	⑤ Bend-Down  Max
⑥Twisting  Max	⑥ Twisting  Max
⑦ Rolling  Max	⑦ Rolling Max 

Fig.4

4. CRIMPING DATA

4.1 Applicator

See Fig.5

Reel Contact Part No		Applicator Number	Wire Size		Insulation Stripping Length [mm]	Wire Crimp		Insulation		Finished Insulation Diameter [mm]	Crimp Tensile Strength [Kg MIN]
			No. of Con-doctor 【e】	Cross Section [mm^2] (AWG) 【f】		Width [mm]	Crimp Height [mm]	⑨ Barrel Width [mm]	⑩ Crimp Height [mm]		
D1000 contact【g】											
S	1827569-2 1903111-2	2151110-1	1	0.05～0.06(#30)	2.0±0.3	0.90 (REF)	0.54±0.03	1.5MAX “ F ”	1.4~1.8MAX	φ0.60~φ1.20	0.5
			1	0.08～0.10(#28)			0.57±0.03				1.0
M	1827570-2 1871303-1 1903112-2 1903120-1 1939991-2	2151082-1	1	0.08～0.10(#28)	2.0±0.3	1.16 (REF)	0.64±0.03	1.5MAX “ F ”	1.6~2.2MAX	φ1.08~φ1.60	1.0
			1	0.12～0.15(#26)			0.67±0.03				2.0
			1	0.21～0.23(#24)			0.73±0.03				3.0
			1	0.34～0.37(#22)			0.80±0.03				4.5
L 【d】	1827571-2 1871304-1 1903113-2 1903121-1	2151111-1	1	0.08 0.10(#28)	2.0±0.3	1.16 (REF)	0.64±0.03	2.1MAX “ F ”	1.6~2.4MAX	φ1.08~φ1.90	1.0
			1	0.12～0.15(#26)			0.67±0.03				2.0
			1	0.21～0.23(#24)			0.73±0.03				3.0
			1	0.34～0.37(#22)			0.80±0.03				4.5
2L 【d】	1827572-2 1871731-1 1903114-2 1903122-1	2151083-1	1	0.34～0.37(#22)	2.0±0.3	1.40 (REF)	0.85±0.03	2.1MAX “ F ”	2.0~2.4MAX	φ1.40~φ2.20	4.5
			1	0.51～0.53(#20)			1.00±0.03				6.5
			1	0.85～0.87(#18)			1.15±0.03				6.5
D1000 Slim contact【g】											
S	*-2367817-1 *-2367819-1	2151110-1	1	0.05～0.06(#30)	2.0±0.3	0.90 (REF)	0.49-0.55	1.5MAX “ F ”	1.4~1.8MAX	φ0.60~φ1.20	0.5
			1	0.08～0.10(#28)			0.52-0.57				1.0
M	*-2367817-2 *-2367819-2	2151082-1	1	0.08～0.10(#28)	2.0±0.3	1.16 (REF)	0.64±0.03	1.5MAX “ F ”	1.6~2.2MAX	φ1.08~φ1.60	1.0
			1	0.12～0.15(#26)			0.67±0.03				2.0
			1	0.21～0.23(#24)			0.73±0.03				3.0
			1	0.34～0.37(#22)			0.80±0.03				4.5

See Fig.5

【d】. L and 2L size are not applicable for D1100 (2.0mm Pitch) housings

【e】. The contacts are not applicable for crimping multi wires. The strand diameter should be over ϕ0.1mm.

【f】. Solid wire is not applied.

【g】. After crimped, check that the crimped sample can be inserted into the housing.

2 Hand Tool

See Fig.6

Loose Piece Contact Part No		Hand Tool Number	Wire Size		Insulation Stripping Length [mm]	Wire Crimp		Insulation		Finished Insulation Diameter [mm]	Crimp Tensile Strength [Kg MIN]
			No. of Con-doctor 【i】	Cross Section [mm^2] (AWG) 【j】		Width [mm]	Crimp Height [mm]	⑨ Barrel Width [mm]	⑩ Crimp Height [mm]		
D1000 contact【l】											
S	1827586-2 1903115-2	2119144-1	1	0.05～0.06(#30)	2.0±0.3	0.90 (REF)	0.49~0.59	1.5MAX " F "	1.3(REF)	φ0.60~φ1.00	0.5
			1	0.08～0.10(#28)			0.52~0.62		1.5(REF)	φ0.80~φ1.20	1.0
M	1827587-2 1871743-1 1903116-2 1903124-1 1939992-2	2119141-1	1	0.08～0.10(#28)	2.0±0.3	1.16 (REF)	0.59~0.69	1.5MAX " F "	1.95(REF)	φ1.08~φ1.40	1.0
			1	0.12～0.15(#26)			0.59~0.69				2.0
			1	0.21～0.23(#24)			0.69~0.79		2.1(REF)	φ1.20~φ1.60	3.0
			1	0.34～0.37(#22)			0.69~0.79				4.5
L 【h】	1827588-2 1871744-1 1903117-2 1903125-1	2119143-1	1	0.08～0.10(#28)	2.0±0.3	1.16 (REF)	0.59~0.69	2.1MAX " F "	2.05(REF)	φ1.08~φ1.40	1.0
			1	0.12～0.15(#26)			0.59~0.69				2.0
			1	0.21～0.23(#24)			0.69~0.79		2.2(REF)	φ1.20~φ1.90	3.0
			1	0.34～0.37(#22)			0.69~0.79				4.5
2L 【h】	1827589-2 1871745-1 1903118-2 1903126-1	2119142-1	1	0.34～0.37(#22)	2.0±0.3	1.40 (REF)	0.80~0.90	2.1MAX " F "	2.1(REF)	φ1.40~φ2.00	4.5
			1	0.51～0.53(#20)			0.80~0.90				6.5
			1	0.85～0.87(#18)			1.10~1.20		2.4(REF)	φ1.80~φ2.20	6.5
D1000 Slim contact【l】											
S	*-2367818-1 *-2367820-1	2381707-2 【m】	1	0.05～0.06(#30)	2.0±0.3	0.90 (REF)	0.49-0.55	1.5MAX " F "	1.3(REF)	φ0.60~φ1.00	0.5
		2381707-2 【n】	1	0.08～0.10(#28)			0.52-0.57		1.5(REF)	φ0.80~φ1.20	1.0
M	*-2367818-2 *-2367820-2	2381748-1 (2119141-1 with 2381710-1) 【k】	1	0.08～0.10(#28)	2.0±0.3	1.16 (REF)	0.59~0.69	1.5MAX " F "	1.95(REF)	φ1.08~φ1.40	1.0
			1	0.12～0.15(#26)			0.59~0.69				2.0
			1	0.21～0.23(#24)			0.69~0.79		2.1(REF)	φ1.20~φ1.60	3.0
			1	0.34～0.37(#22)			0.69~0.79				4.5

Fig.6

【h】. L and 2L size are not applicable for D1100 (2.0mm Pitch) housings

【i】. The contacts are not applicable for crimping multi wires. The strand diameter should be over ϕ0.1mm.

【j】. Solid wire is not applied.

【k】. Apply to use D1000 Hand tool with 2381710-1 by exchange flip locator

【l】. After crimped, check that the crimped sample can be inserted into the housing.

【m】. 2119144-1 with 2381710-1 can be used for crimping if it can be crimped with crimp height 0.49-0.55 mm

【n】. 2119144-1 with 2381710-1 can be used for crimping if it can be crimped with crimp height 0.52-0.57 mm