




TE Connectivity. All Rights Reserved.

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

REVISIONS

P	LTR	DESCRIPTION	DATE	DWN	APVD
	P	REVISED PER ECR-23-181664	08AUG2023	AP	DSC

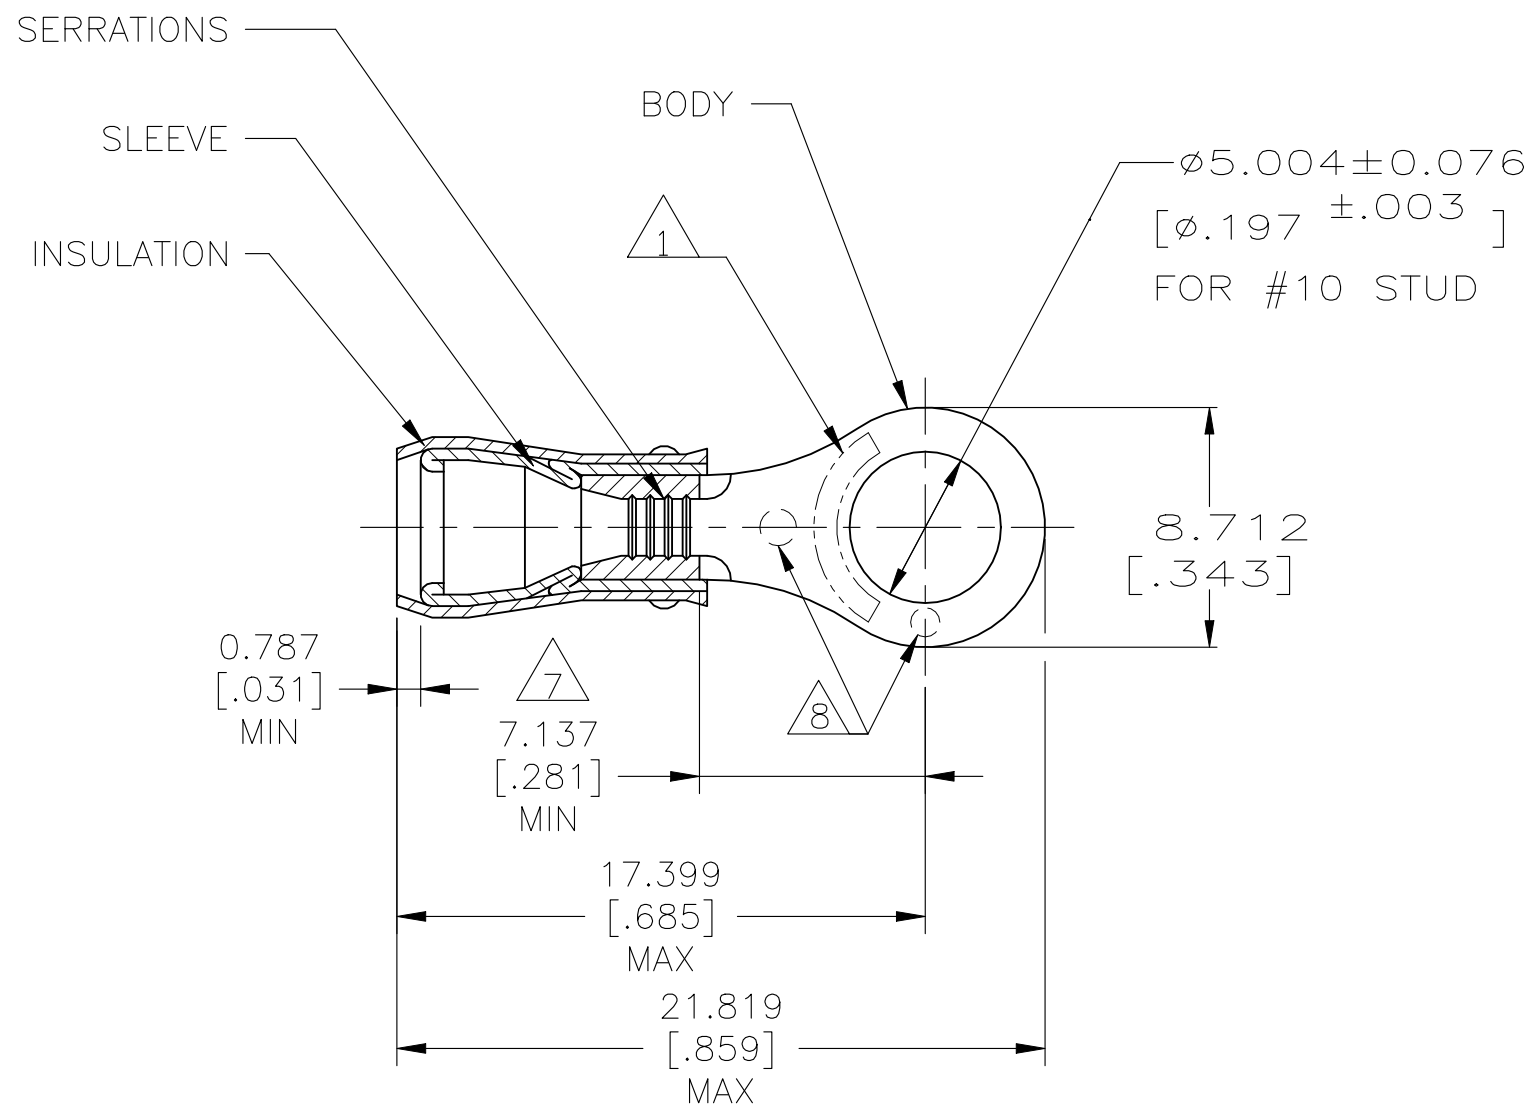

AMP WIRE RANGE	Listed FILE E13288	LR7189 Certified
16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED	16-14 AWG SOLID OR STRANDED

- 1 STAMP AMP 16-14* APPROX AS SHOWN
- 2 WIRE INSULATION DIAMETER:
Ø2.921[.115] TO Ø4.318[.170]
- 3 BODY MATERIAL THK:
0.787±0.051[.031±.002]
- 4 NOTE DELETED
- 5 MATERIAL:
BODY & SLEEVE - COPPER PER ASTM B152
INSULATION - NYLON
- 6 FINISH:
BODY & SLEEVE - TIN PLATE 0.00254[.000100]
MIN EXT THK PER ASTM B545
INSULATION COLOR - BLUE
- 7 APPLIES FROM EGDE OF METAL WIRE BARREL TO
CENTER OF STUD HOLE
- 8 DIMPLE STAMP MARK OPTIONAL

100	LOOSE PIECE, BOX	8-36160-1
5000	ON TAPE, REEL	2-36160-1
1000	LOOSE PIECE	36160
QUANTITY	PACKAGE TYPE	PART NO

AMP INCORPORATED
CUSTOMER SERVICE SYSTEMSMAX RECOMMENDED OPERATING
TEMPERATURE:

105° C [221° F]

VOLTAGE RATING:

300 V MAX

WIRE CROSS SECTIONAL AREA RANGE:

1.04-2.62mm² [2050-5180] CIR MILS
SOLID OR STRANDEDFOR ADDITIONAL
PRODUCT INFORMATION OR
COPIES OF DRAWINGS
AND TECHNICAL DOCUMENTS

PRODUCT INFORMATION CENTER

1-800-522-6752

FOR APPLICATION

TOOLING INFORMATION

TOOLING ASSISTANCE CENTER


1-800-722-1111

FOR ORDER ENTRY

1-800-526-5142

THIS DRAWING IS A CONTROLLED DOCUMENT FOR
AMP INCORPORATED. IT IS SUBJECT TO CHANGE
AND THE CONTROLLING ENGINEERING ORGANIZATION
SHOULD BE CONTACTED FOR THE LATEST REVISION.

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS:
mm [INCHES]TOLERANCES UNLESS
OTHERWISE SPECIFIED:

0 PLC	± -
1 PLC	± -
2 PLC	± -
3 PLC	± 0.127[.005]
4 PLC	± -
ANGLES	± -
FINISH	± -

MATERIAL



DWN

JR RUTH

17DEC99

CHK

RE HERSEY

17DEC99

APVD

T MICHELUTTI

17DEC99

PRODUCT SPEC

UL 486A-B

APPLICATION SPEC

114-2157

WEIGHT

-

CUSTOMER DRAWING



TE Connectivity

NAME

TERMINAL, RING TONGUE,
PIDG™, WIRE SIZE: 16-14 AWG
-

SIZE

CAGE CODE

DRAWING NO

RESTRICTED TO

A300779

C-36160

SCALE 4:1

SHEET 1 OF 1

REV P