


REVISIONS					
P	LTR	DESCRIPTION	DATE	DWN	APVD
	A	RELEASED	23MAR2021	Y.O	E.I
	B	REVISED	08MAR2023	H.O	T.S

I. TECHNICAL CHARACTERISTICS:
CONTACT MATERIAL: CU ALLOY
SURFACE PLATING:GOLD PLATING

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

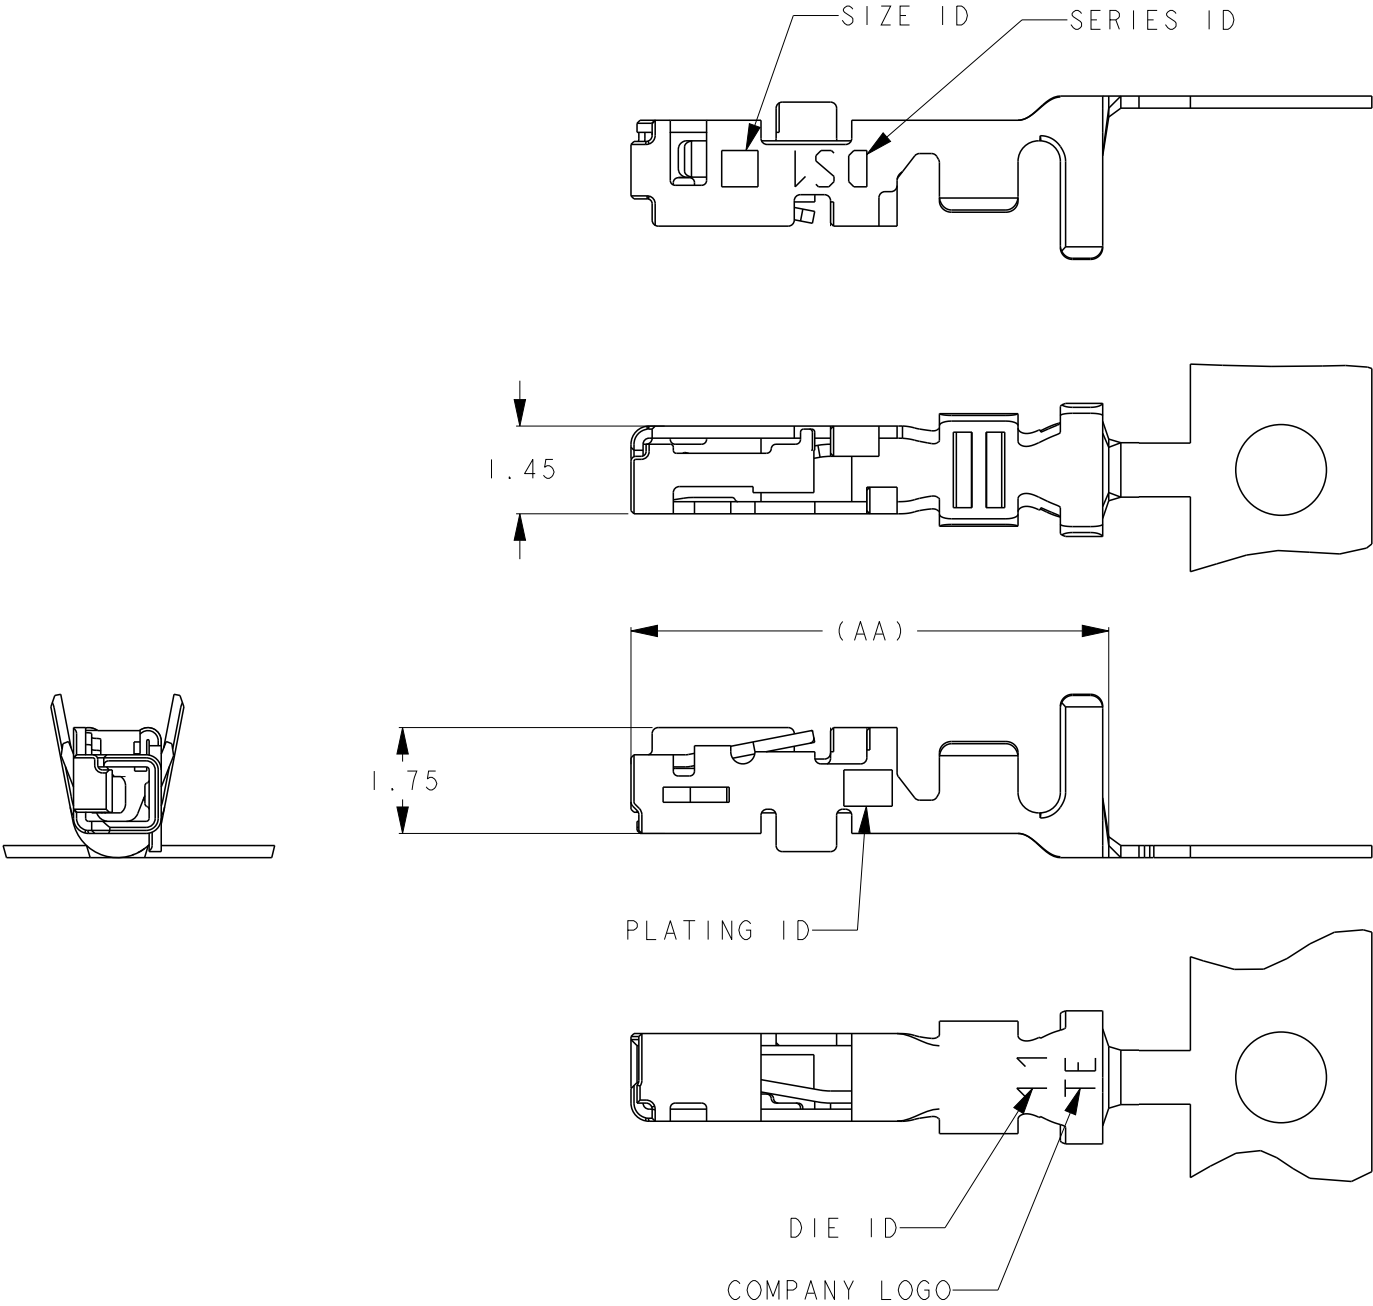

7.9	0.1g	M	3	1.08-1.6	AWG28-22, 0.08-0.37SQmm	M SIZE,GOLD 0.76μm	2-2367817-2
7.9	0.1g	M	1	1.08-1.6	AWG28-22, 0.08-0.37SQmm	M SIZE,GOLD 0.2μm	2367817-2
7.9	0.1g	S	1	0.6-1.2	AWG30-28, 0.05-0.1SQmm	S SIZE,GOLD 0.2μm	2367817-1
DIMENSION AA	NET WEIGHT	SIZE ID	PLATING ID	INSUL. RANGE	WIRE RANGE	DESCRIPTION	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN Y. OKADA 13APR2020	<div></div> TE Connectivity				
DIMENSIONS: mm		CHK T. SHIMOYASU 13APR2020					
		APVD E. IKEMATSU 13APR2020					
TOLERANCES UNLESS OTHERWISE SPECIFIED:		PRODUCT SPEC 108-140257					
MATERIAL -		APPLICATION SPEC 114-5377	NAME REC CONTACT, D1000 SLIM, DYNAMIC -		SIZE A3	CAGE CODE -	DRAWING NO C-2367817
FINISH -		WEIGHT -	RESTRICTED TO -		SCALE 8:1		
		CUSTOMER DRAWING		SHEET 1 OF 1		REV B	

Crimping requirements for DYNAMIC 1000 Series contacts

1. SCOPE

This Application specification covers the crimping requirements for DYNAMIC 1000 Series contacts

2. APPLICABLE PRODUCT PART NUMBER

See Fig.1.

Contact Type	Size	Contact Part number L/P: Loose Piece		Plating Finish	Wire Size (AWG# REF) [mm2]	Insulation Diameter [mm]
Receptacle Contact	S	1827569-2/ *- 2367817-1 【b】	: Reel	Gold Plating	0.05～0.10 (#30～#28)	φ 0.60～φ 1.20
		1827586-2/ *-2367818-1 【b】	: L/P			
	M	1827570-2/ *-2367817-2 【b】	: Reel	Gold Plating	0.08～0.37 (#28～#22)	φ 1.08～φ 1.60
		1827587-2/ *-2367818-2 【b】	: L/P			
		1939991-2	: Reel	Gold 0.76Plating		
		1939992-2	: L/P			
		1871303-1	: Reel	Tin Plating		
		1871743-1	: L/P			
		L 【a】	1827571-2	: Reel		
	1827588-2		: L/P			
	1871304-1		: Reel	Tin Plating		
	1871744-1		: L/P			
	2L 【a】	1827572-2	: Reel	Gold Plating	0.34～0.87 (#22～#18)	φ 1.40～φ 2.20
		1827589-2	: L/P			
		1871731-1	: Reel	Tin Plating		
		1871745-1	: L/P			
	S	1903111-2/ *-2367819-1 【b】	: Reel	Gold Plating	0.05～0.10 (#30～#28)	φ 0.60～φ 1.20
		1903115-2/ *-2367820-1 【b】	: L/P			
	M	1903112-2/ *-2367819-2 【b】	: Reel	Gold Plating	0.08～0.37 (#28～#22)	φ 1.08～φ 1.60
		1903116-2/ *-2367820-2 【b】	: L/P			
		1903120-1	: Reel	Tin Plating		
		1903124-1	: L/P			
	L 【a】	1903113-2	: Reel	Gold Plating	0.08～0.37 (#28～#22)	φ 1.08～φ 1.90
		1903117-2	: L/P			
		1903121-1	: Reel	Tin Plating		
		1903125-1	: L/P			
	2L 【a】	1903114-2	: Reel	Gold Plating	0.34～0.87 (#22～#18)	φ 1.40～φ 2.20
		1903118-2	: L/P			
		1903122-1	: Reel	Tin Plating		
		1903126-1	: L/P			

Fig.1

[a]. L and 2L size are not applicable for D1100 (2.0mm Pitch) housings.

[b]. D1000 Slim Contact. It is applicable for D1000 slim housings.

3. Crimping REQUIREMENTS

See Fig.2 and Fig.3

NO.	Check Item	Specified Requirements	NO.	Check Item	Specified Requirements
①	Wire Stripping Length	2mm±0.3	⑥	Twisting	3° Max
②	Cut-Off Tab Length	0.25mm Max	⑦	Rolling	5° Max
③	Rear Bell mouth Length	0.1~0.3mm	⑧	Wire-End Protrusion Length	0.1~0.65mm
④	Bend-Up	3° Max	⑨ 【c】	Insulation Barrel Width	See Fig.4, 5
⑤	Bend-Down	3° Max	⑩ 【c】	Insulation Barrel Height	See Fig.4, 5

【c】. Insulation barrel crimping dimension ⑨ and ⑩ should be controlled under Fig.5 and Fig.6 not to interfere housings.

Fig 2

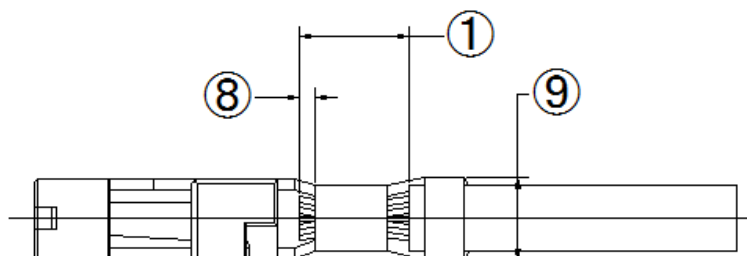
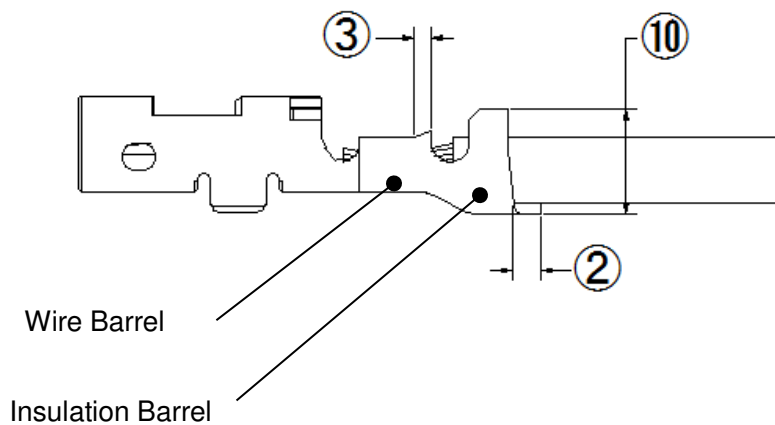


Fig 3

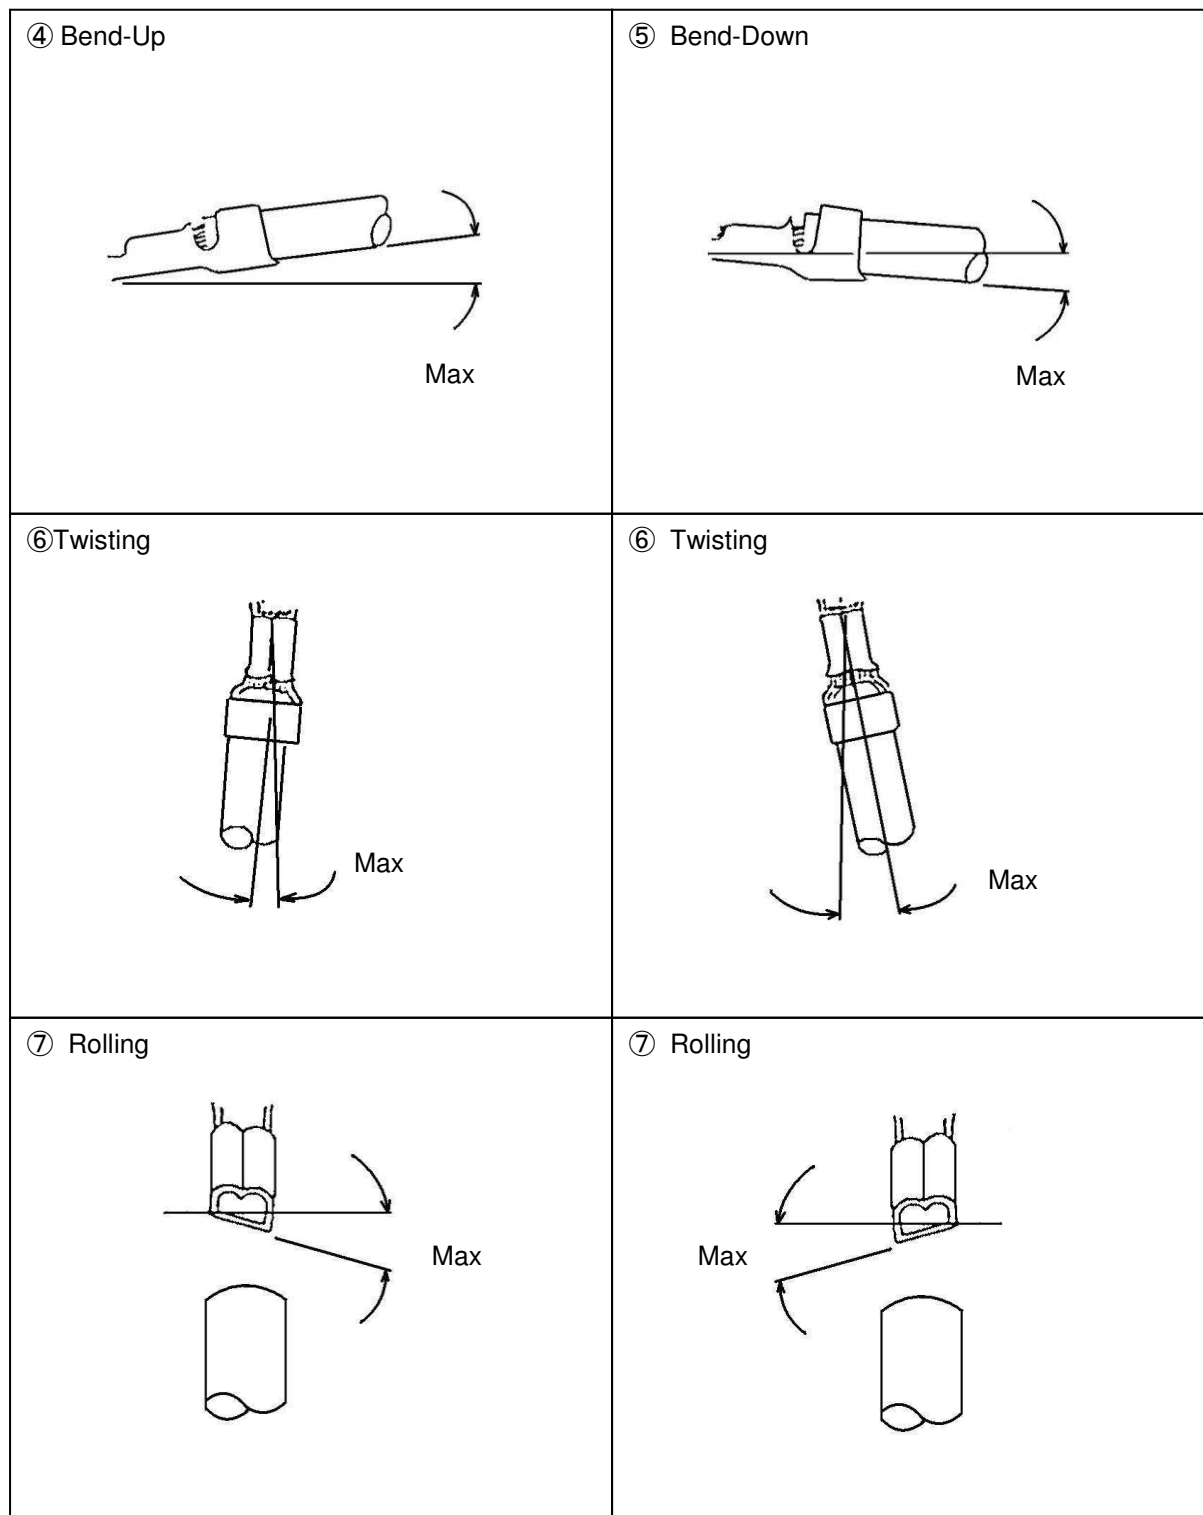


Fig.4

4. CRIMPING DATA

4.1 Applicator

See Fig.5

Reel Contact Part No		Applicator Number	Wire Size		Insulation Stripping Length [mm]	Wire Crimp		Insulation		Finished Insulation Diameter [mm]	Crimp Tensile Strength [Kg MIN]
			No. of Con- ductor [e]	Cross Section [mm ²] (AWG) [f]		Width [mm]	Crimp Height [mm]	⑨ Barrel Width [mm]	⑩ Crimp Height [mm]		
D1000 contact [g]											
S	1827569-2 1903111-2	2151110-1	1	0.05~ 0.06(#30)	2.0±0.3	0.90 (REF)	0.54±0.03	1.5MAX “ F ”	1.4~ 1.8MAX	φ0.60~ φ1.20	0.5
			1	0.08~ 0.10(#28)			0.57±0.03				1.0
M	1827570-2 1871303-1 1903112-2 1903120-1 1939991-2	2151082-1	1	0.08~ 0.10(#28)	2.0±0.3	1.16 (REF)	0.64±0.03	1.5MAX “ F ”	1.6~ 2.2MAX	φ1.08~ φ1.60	1.0
			1	0.12~ 0.15(#26)			0.67±0.03				2.0
			1	0.21~ 0.23(#24)			0.73±0.03				3.0
			1	0.34~ 0.37(#22)			0.80±0.03				4.5
L [d]	1827571-2 1871304-1 1903113-2 1903121-1	2151111-1	1	0.08 0.10(#28)	2.0±0.3	1.16 (REF)	0.64±0.03	2.1MAX “ F ”	1.6~ 2.4MAX	φ1.08~ φ1.90	1.0
			1	0.12~ 0.15(#26)			0.67±0.03				2.0
			1	0.21~ 0.23(#24)			0.73±0.03				3.0
			1	0.34~ 0.37(#22)			0.80±0.03				4.5
2L [d]	1827572-2 1871731-1 1903114-2 1903122-1	2151083-1	1	0.34~ 0.37(#22)	2.0±0.3	1.40 (REF)	0.85±0.03	2.1MAX “ F ”	2.0~ 2.4MAX	φ1.40~ φ2.20	4.5
			1	0.51~ 0.53(#20)			1.00±0.03				6.5
			1	0.85~ 0.87(#18)			1.15±0.03				6.5
D1000 Slim contact [g]											
S	*-2367817-1 *-2367819-1	2151110-1	1	0.05~ 0.06(#30)	2.0±0.3	0.90 (REF)	0.49-0.55	1.5MAX “ F ”	1.4~ 1.8MAX	φ0.60~ φ1.20	0.5
			1	0.08~ 0.10(#28)			0.52-0.57				1.0
M	*-2367817-2 *-2367819-2	2151082-1	1	0.08~ 0.10(#28)	2.0±0.3	1.16 (REF)	0.64±0.03	1.5MAX “ F ”	1.6~ 2.2MAX	φ1.08~ φ1.60	1.0
			1	0.12~ 0.15(#26)			0.67±0.03				2.0
			1	0.21~ 0.23(#24)			0.73±0.03				3.0
			1	0.34~ 0.37(#22)			0.80±0.03				4.5

See Fig.5

[d]. L and 2L size are not applicable for D1100 (2.0mm Pitch) housings

[e]. The contacts are not applicable for crimping multi wires. The strand diameter should be over ϕ 0.1mm.

[f]. Solid wire is not applied.

[g]. After crimped, check that the crimped sample can be inserted into the housing.

2 Hand Tool

See Fig.6

Loose Piece Contact Part No		Hand Tool Number	Wire Size		Insulation Stripping Length [mm]	Wire Crimp		Insulation		Finished Insulation Diameter [mm]	Crimp Tensile Strength [Kg MIN]
			No. of Con- ductor 【i】	Cross Section [mm ²] (AWG) 【j】		Width [mm]	Crimp Height [mm]	⑨ Barrel Width [mm]	⑩ Crimp Height [mm]		
D1000 contact 【I】											
S	1827586-2 1903115-2	2119144-1	1	0.05~ 0.06(#30)	2.0±0.3	0.90 (REF)	0.49~0.59	1.5MAX “ F ”	1.3(REF)	φ0.60~ φ1.00	0.5
			1	0.08~ 0.10(#28)			0.52~0.62		1.5(REF)	φ0.80~ φ1.20	1.0
M	1827587-2 1871743-1 1903116-2 1903124-1 1939992-2	2119141-1	1	0.08~ 0.10(#28)	2.0±0.3	1.16 (REF)	0.59~0.69	1.5MAX “ F ”	1.95(REF)	φ1.08~ φ1.40	1.0
			1	0.12~ 0.15(#26)			0.59~0.69				2.0
			1	0.21~ 0.23(#24)			0.69~0.79		2.1(REF)	φ1.20~ φ1.60	3.0
			1	0.34~ 0.37(#22)			0.69~0.79				4.5
L 【h】	1827588-2 1871744-1 1903117-2 1903125-1	2119143-1	1	0.08~ 0.10(#28)	2.0±0.3	1.16 (REF)	0.59~0.69	2.1MAX “ F ”	2.05(REF)	φ1.08~ φ1.40	1.0
			1	0.12~ 0.15(#26)			0.59~0.69				2.0
			1	0.21~ 0.23(#24)			0.69~0.79		2.2(REF)	φ1.20~ φ1.90	3.0
			1	0.34~ 0.37(#22)			0.69~0.79				4.5
2L 【h】	1827589-2 1871745-1 1903118-2 1903126-1	2119142-1	1	0.34~ 0.37(#22)	2.0±0.3	1.40 (REF)	0.80~0.90	2.1MAX “ F ”	2.1(REF)	φ1.40~ φ2.00	4.5
			1	0.51~ 0.53(#20)			0.80~0.90				6.5
			1	0.85~ 0.87(#18)			1.10~1.20		2.4(REF)	φ1.80~ φ2.20	6.5
D1000 Slim contact 【I】											
S	*-2367818-1 *-2367820-1	-【m】	1	0.05~ 0.06(#30)	2.0±0.3	0.90 (REF)	-【m】	1.5MAX “ F ”	1.3(REF)	φ0.60~ φ1.00	0.5
		-【n】	1	0.08~ 0.10(#28)			-【n】		1.5(REF)	φ0.80~ φ1.20	1.0
M	*-2367818-2 *-2367820-2	2381748-1 (2119141-1 with 2381710-1) 【k】	1	0.08~ 0.10(#28)	2.0±0.3	1.16 (REF)	0.59~0.69	1.5MAX “ F ”	1.95(REF)	φ1.08~ φ1.40	1.0
			1	0.12~ 0.15(#26)			0.59~0.69				2.0
			1	0.21~ 0.23(#24)			0.69~0.79		2.1(REF)	φ1.20~ φ1.60	3.0
			1	0.34~ 0.37(#22)			0.69~0.79				4.5

Fig.6

[h]. L and 2L size are not applicable for D1100 (2.0mm Pitch) housings

[i]. The contacts are not applicable for crimping multi wires. The strand diameter should be over φ0.1mm.

[j]. Solid wire is not applied.

[k]. Apply to use D1000 Hand tool with 2381710-1 by exchange flip locator

[l]. After crimped, check that the crimped sample can be inserted into the housing.

[m]. 2119144-1 with 2381710-1 can be used for crimping if it can be crimped with crimp height 0.49-0.55 mm

[n]. 2119144-1 with 2381710-1 can be used for crimping if it can be crimped with crimp height 0.52-0.57 mm