




ohne Ansaughaube
without hood




Verpackt in Gurtverpackung
Tape on Reel Packaging
Verpackungseinheit: 320 Stück
Packaging unit: 320 pcs



Abspulrichtung - *Reel off Direction*

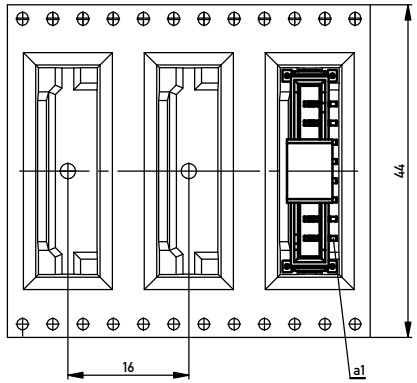

Leiterplatten-Layout Vorschlag für SMT
PCB-Layout Proposal for SMT




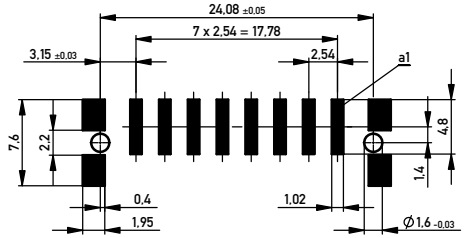


Anforderungsstufe 1
Performance Level 1

Kontaktbereich vergoldet
Mating Area gold plating

Anschlussbereich verzinnt 4-6 µm
Terminal Area 4-6 µm tin plating

Koplanarität der Anschlüsse ≤ 0,1 mm
Coplanarity Area of Termination ≤ 0,1 mm

Ident-Nr. *part-no.*	Codierung *coding*	Farbe *color*	A	B	C	D	Bemerkung *note*
454209		weiß *white*	0,6	9,0	1,2	8,4	Codierung wie Variante schwarz *Encoding such variant black*
294652		rot *red*	4,2	5,4	4,8	4,8	
294651		grün *green*	3,0	6,6	3,6	6,0	
294650		blau *blue*	1,8	7,8	2,4	7,2	
294649		schwarz *black*	0,6	9,0	1,2	8,4	

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
http://www.100y.com.tw

Copyright by ERNI GmbH
Proprietary notice pursuant to ISO 16016 to be observed

Information:

Tolerances

All Dimensions in mm

Scale 3:1

All rights reserved.
Only for Information.
To ensure that this is the latest version of this drawing, please contact one of the ERNI companies before using.

Subject to modification without prior notice.
Drawing will not be updated.

Designation
M 2,54 SRC-P, 8-polig

ERNI www.ERNI.com

224994

Index		Date	
9		30.04.2013	

Class SRCP

A2