
DRAWING MADE IN THIRD ANGLE PROJECTION

3	2	1	5016	LOC DF	DIST BO

THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION

© COPYRIGHT

REVISIONS					
P	F	ZONE	LTR	DESCRIPTION	DATE	APPROVED
			Z1	REVISED PER ECO-11-005294	06APR11	HMR

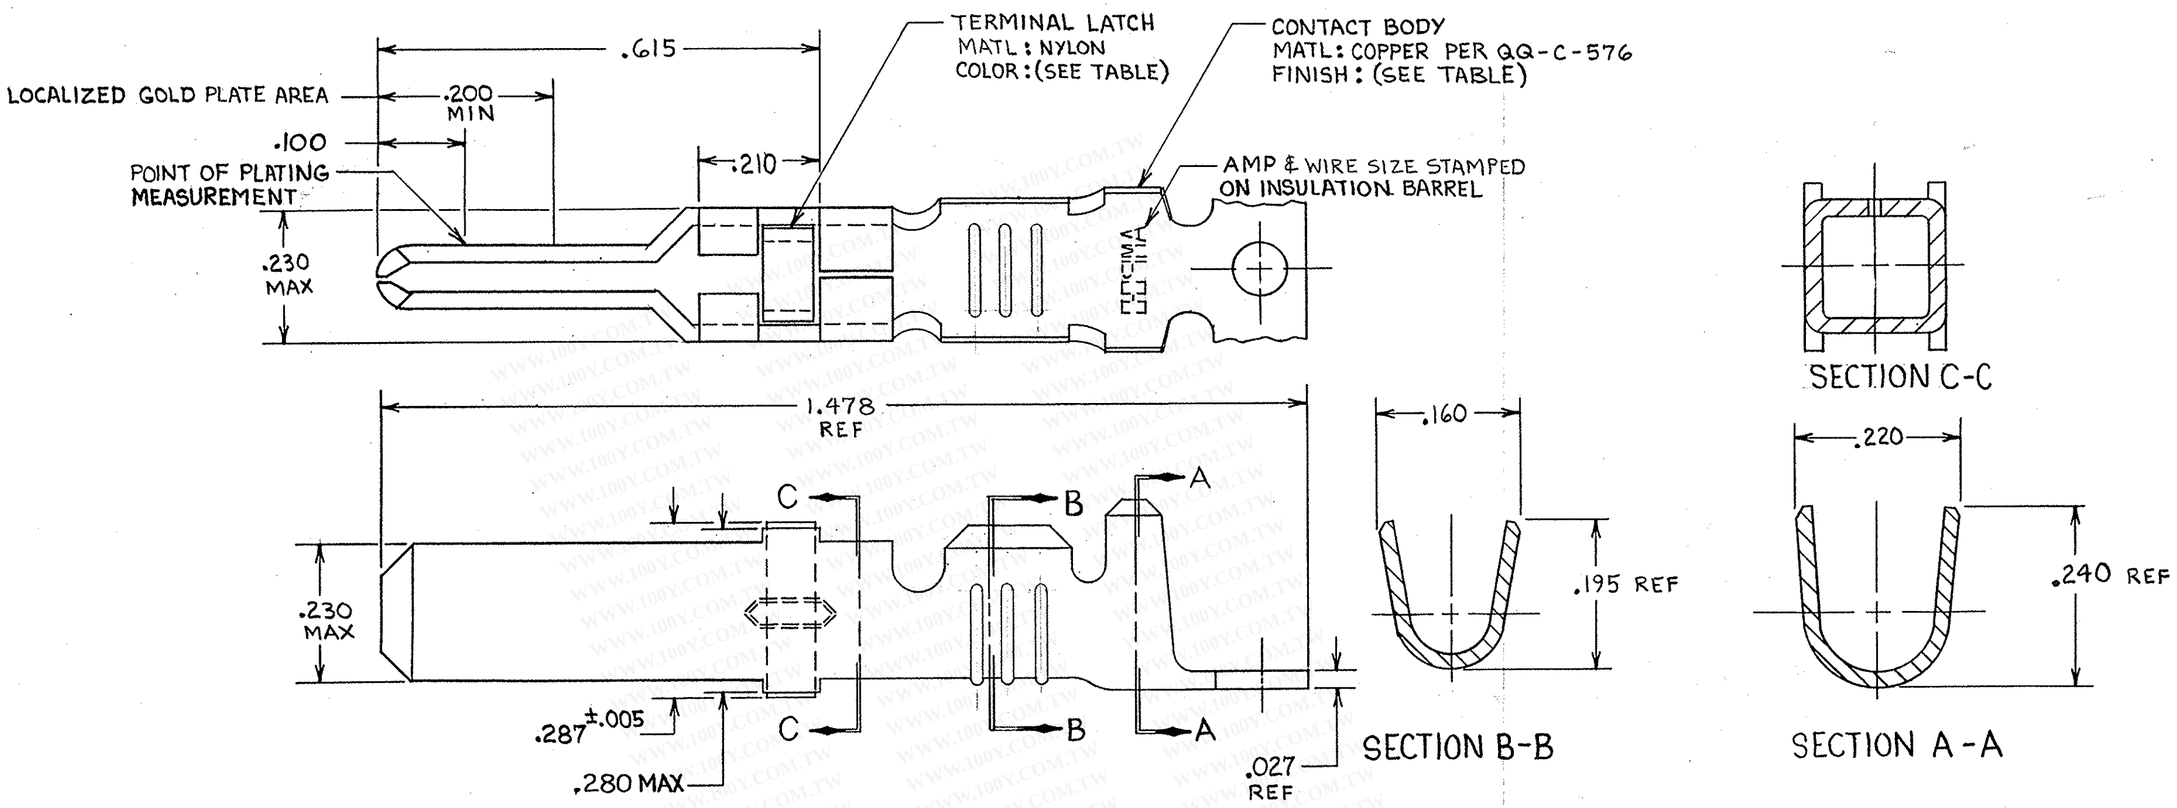

1. REELED FOR USE WITH STANDARD APPLICATORS.
2. REELED FOR USE WITH HEAVY DUTY MINI-APPLICATORS.
3. PLATED WITH .000100 MIN SILVER PER QQ-S-365.
4. PLATED WITH .000015 MIN GOLD PER MIL-G-45204 IN THE LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER .000030 MIN NICKEL PER QQ-N-290.
5. PLATED WITH .000030 MIN GOLD PER MIL-G-45204 IN THE LOCALIZED GOLD PLATE AREA, GOLD FLASH ON THE REMAINDER, OVER .000030 MIN NICKEL PER QQ-N-290.
6. PLATED WITH .000050 MIN 93-7% TIN-LEAD ALLOY OVER .000030 MIN NICKEL PER QQ-N-290.
7. WIRE RANGE = 12-16 AWG.
8. INSULATION RANGE = .140-.165 DIA.
9. PLATED TIN (NO LEAD) .000050 MIN THK PER ASTM-B-545 OVER NICKEL .000030 MIN THK PER QQ-N-290

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

TERMINAL LATCH COLOR	FINISH	L.P. ASS'Y P/N REF	STRIP ASS'Y P/N
BLACK	9	66261-5	1-66255-2
BLACK	9	66261-5	1-66255-1
NATURAL	NONE	—	1-66255-0
NATURAL	NONE	—	66255-9
NATURAL	3	66261-4	66255-8
NATURAL	3	66261-4	66255-7
BLACK	5	66261-2	66255-6
BLACK	6	66261-1	66255-5
BLACK	4	OBSOLETE	66255-4
BLACK	4	OBSOLETE	66255-3
BLACK	5	66261-2	66255-2
BLACK	6	66261-1	66255-1

66255

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES.
TOLERANCES ON:
DECIMALS ±.010
ANGLES ±

MATERIAL: SEE CALLOUT

FINISH: SEE DASH NO

CONTRACT NO

DR Rick Rohrbaugh 9-27-85
CHK Larry G. Lawver 10-1-85
APPD L.R. Balash 10-1-85
APPD Dennis E. Smith 10-3-85
DSGN APPD
OTHER APPD

TE Connectivity

NAME: MALE TYPE XII CONTACT STRIP ASSEMBLY

SIZE	FSCM NO	DRAWING NO
C	00779	66255

SCALE NTS SHEET

CUSTOMER DRAWING