

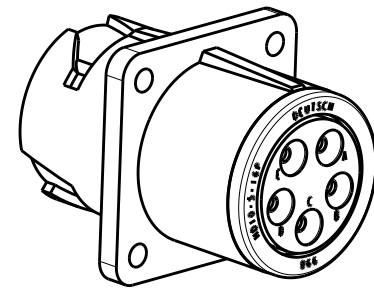
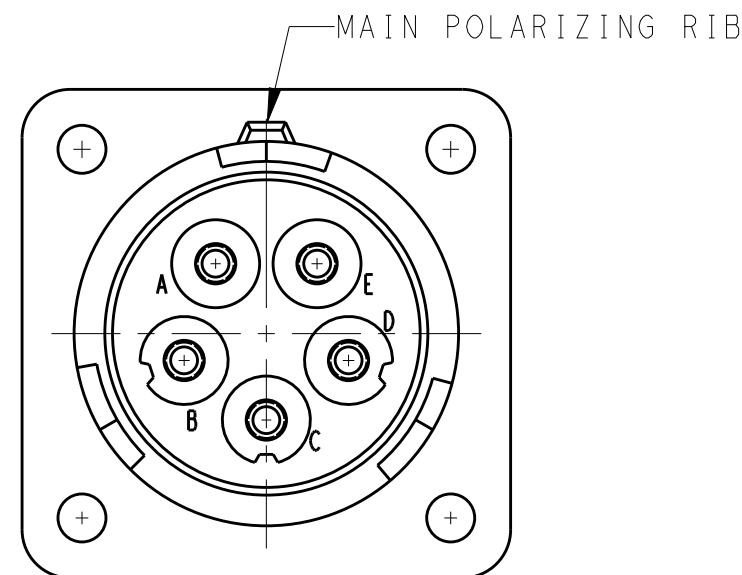
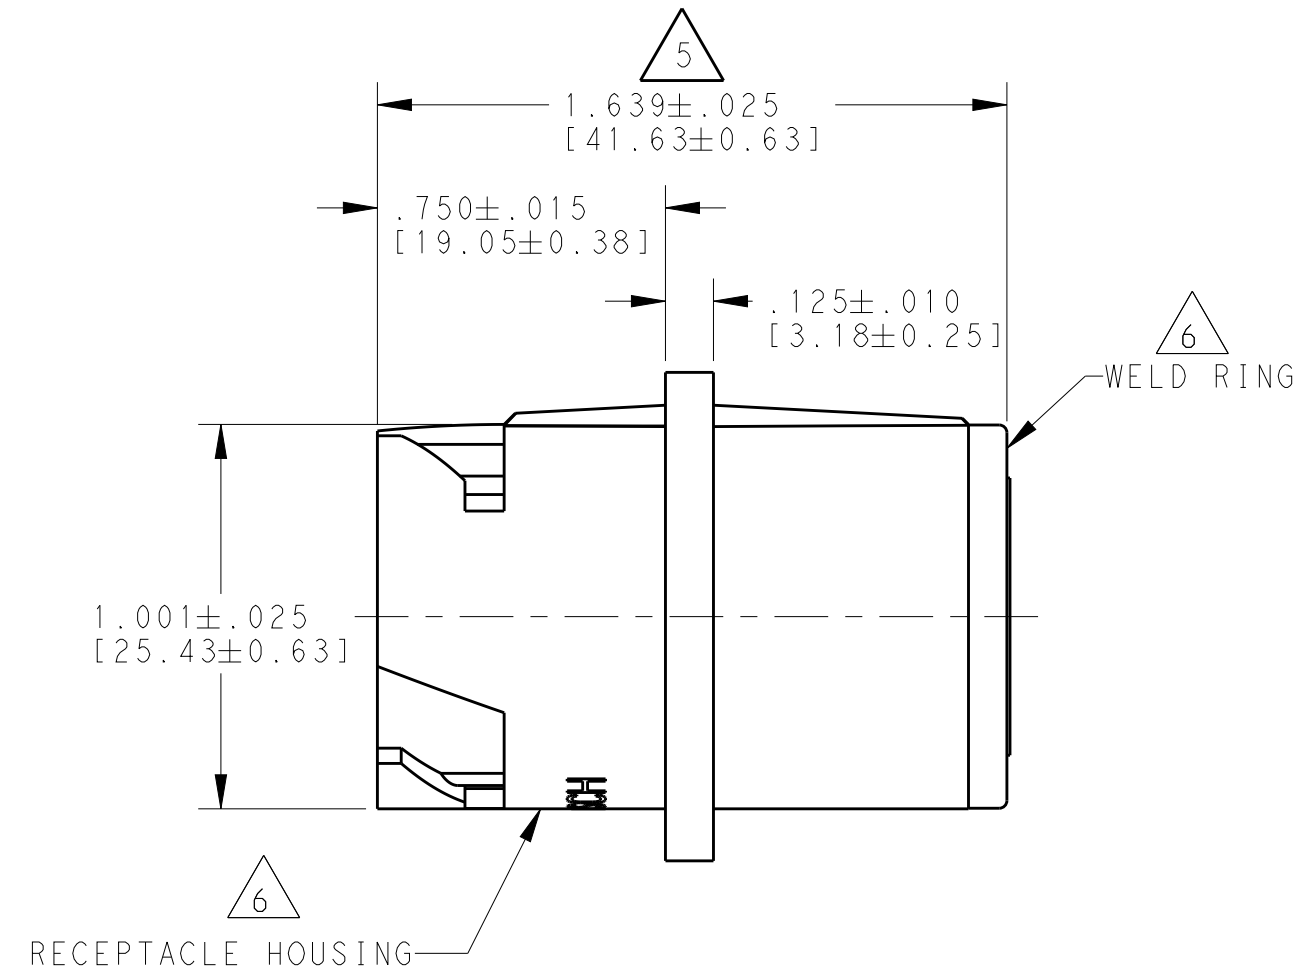


LOC	DIST	REVISIONS					
		P	LTR	DESCRIPTION	DATE	DWN	APVD
-	-		F	REVISED PER E.O. P18547	13APR2004	-	RDR
			G	REVISED PER E.O. P20555	21JUL2010	-	RDR
			H	REVISED PER E.O. P21366	4JUL2012	-	RDR
			H1	REVISED PER ECO-14-002953	29JAN2014	PV	DM

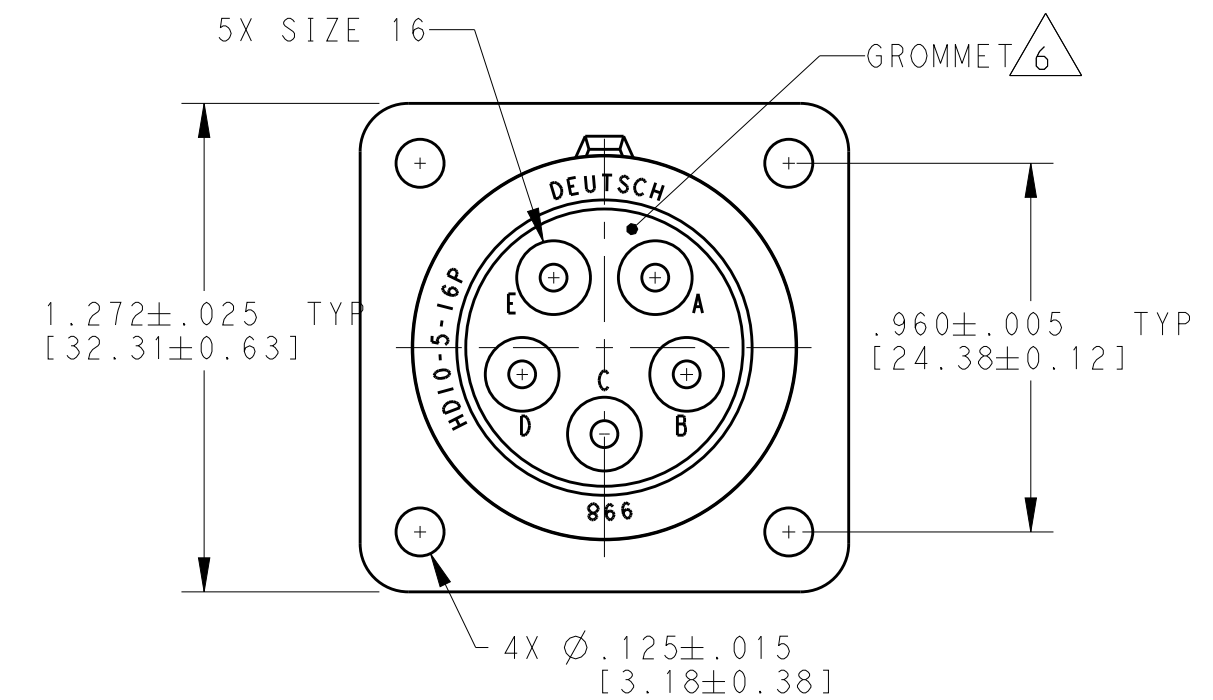

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力電子(上海) 86-21-34970699
勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

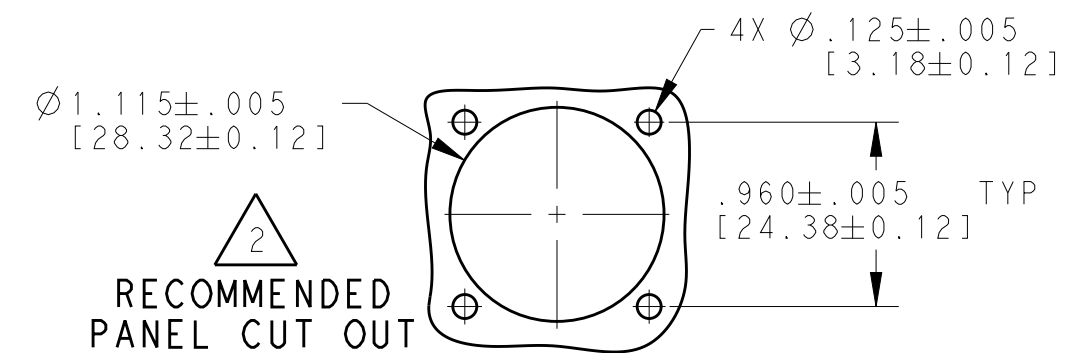

- 6 MATERIAL:
RECEPTACLE HOUSING AND WELD RING: PA 15%GF (GREY)
GROMMET: SILICONE (RED)
- 5 OVERALL DIMENSION DOES NOT INCLUDE RUBBER GROMMET.
- 4 THIS RECEPTACLE MATES WITH FOLLOWING PLUG (X=SEAL TYPE, XXXX = ALL MODIFICATIONS).
HD16-5-16SX-XXXX
- 3 SEE DRAWING 0425-015-0000 FOR CONTACT AND WIRE
PERFORMANCE AND APPLICATION CHARACTERISTICS.
- 2 MAXIMUM PANEL THICKNESS IS .250 [6.35].

1. SEE TABLE FOR USABLE WIRE RANGE AND INSULATION RANGE.

CONTACT SIZE	MINIMUM O.D.	MAXIMUM O.D.	WIRE RANGE [mm ²] 
16	.100 [2.54]	.150 [3.81]	14-20 AWG [2.0-.50]

NOTES:

THIS DRAWING IS A CONTROLLED DOCUMENT.		DWN J. HAYNES 05OCT1999		 TE Connectivity	
		CHK I. GRANTCHAROVA 16SEP2013			
DIMENSIONS: INCHES[mm]		TOLERANCES UNLESS OTHERWISE SPECIFIED: 0 PLC ± 1 PLC ± 2 PLC ± 3 PLC ± .025 4 PLC ± ANGLES ±0°30'0" FINISH		NAME RECEPTACLE CONNECTOR SQUARE FLANGE HD10 SERIES ARR. 5-16 COLOUR: GREY	
		PRODUCT SPEC - APPLICATION SPEC - WEIGHT 31.95 (g)		SIZE CAGE CODE DRAWING NO RESTRICTED TO -	
MATERIAL 		Customer Drawing		SCALE 2:1 SHEET 1 OF 1 REV H1	