
THIS DRAWING IS UNPUBLISHED. RELEASED FOR PUBLICATION –,– .
© COPYRIGHT – By – ALL RIGHTS RESERVED.


LOC	DIST
AF	50


REVISIONS


P	LTR	DESCRIPTION	DATE	DWN	APVD
	K	REVISED PER ECR–13–004343	30JUL13	KH	KR

勝特力電材超市–龍山店 886-3-5773766
勝特力電材超市–光復店 886-3-5729570
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
http://www.100y.com.tw

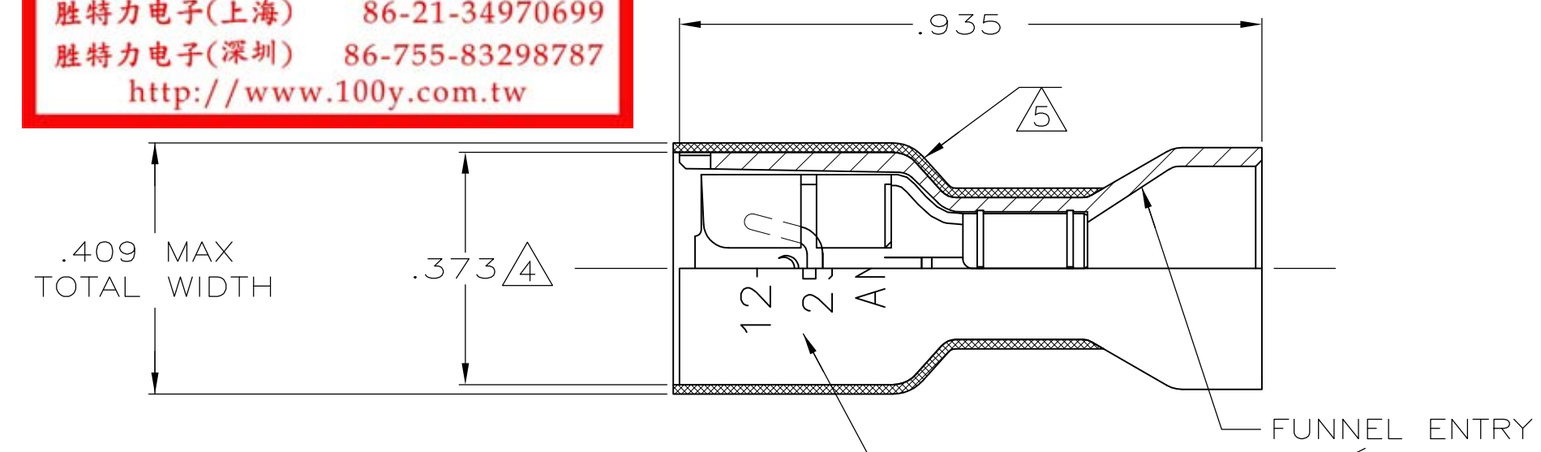

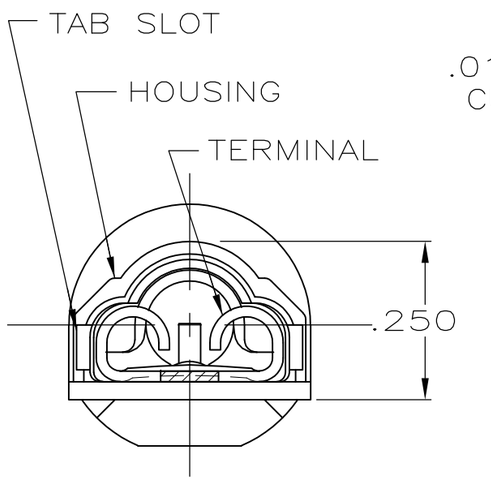

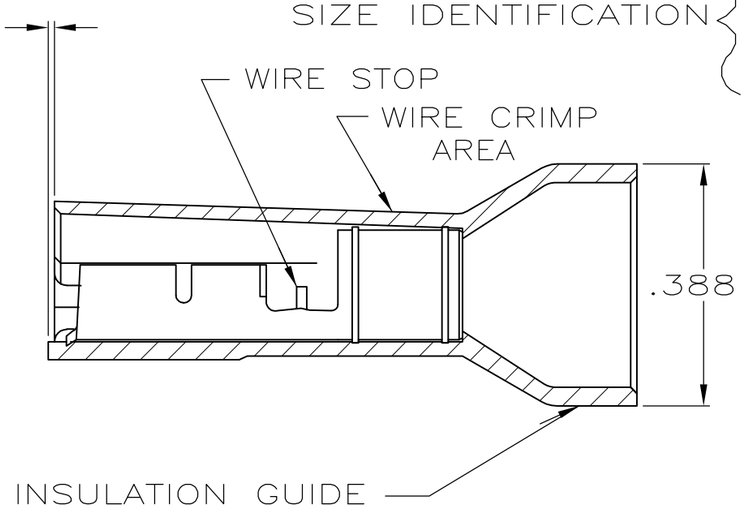

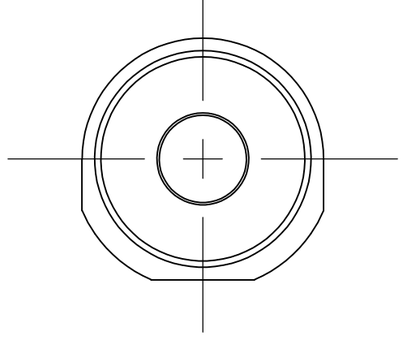

1 MATES WITH .032±.001x.250 TAB

2 WIRE STRIP LENGTH .312

3 INSULATION SIZE .320 MAX DIA

4 DIMENSION DOES NOT INCLUDE TRIM BURR

5 .015 MAX CARRIER TRIM BURR PER SIDE IS ALLOWABLE IN THE SHADED AREA

HOUSING:NYLON,COLOR–YELLOW TRANSLUCENT RECEPTACLE: BRASS,TIN	4–520448–2
MATERIAL & FINISH	PART NO

THIS DRAWING IS A CONTROLLED DOCUMENT.

DIMENSIONS: INCHES

TOLERANCES UNLESS OTHERWISE SPECIFIED:
0 PLC ± –
1 PLC ± –
2 PLC ± –
3 PLC ± .015
4 PLC ± –
ANGLES ± –

MATERIAL: SEE TABLE

FINISH: SEE TABLE

DWN	P FORTNEY 11/4/88
CHK	MS FEHER 11/7/88
APVD	K RANDOLPH 11/7/88
PRODUCT SPEC	108–2043
APPLICATION SPEC	114–2035
WEIGHT	–

TE Connectivity

NAME: RECEPTACLE ASSEMBLY,ULTRA–FAST, LOOSE PIECE .250 SERIES,12–10 AWG

SIZE	CAGE CODE	DRAWING NO	RESTRICTED TO
A3	00779	C–520448	–

CUSTOMER DRAWING

SCALE	SHEET	REV
4:1	1 OF 1	K