
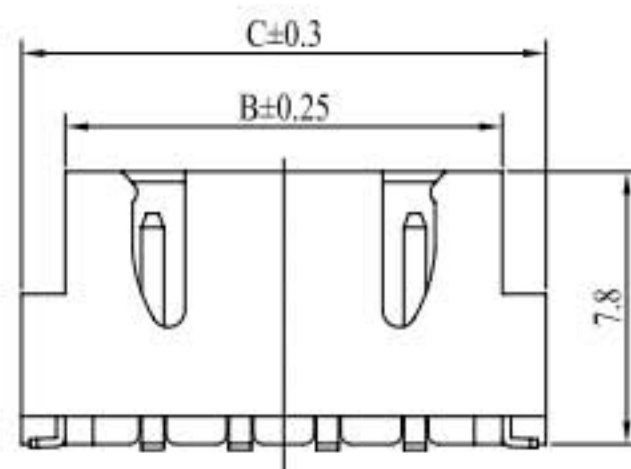
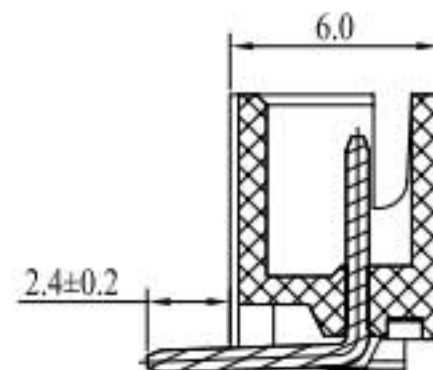
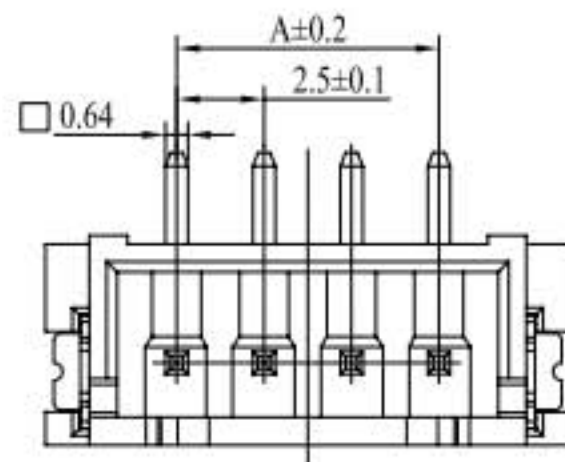


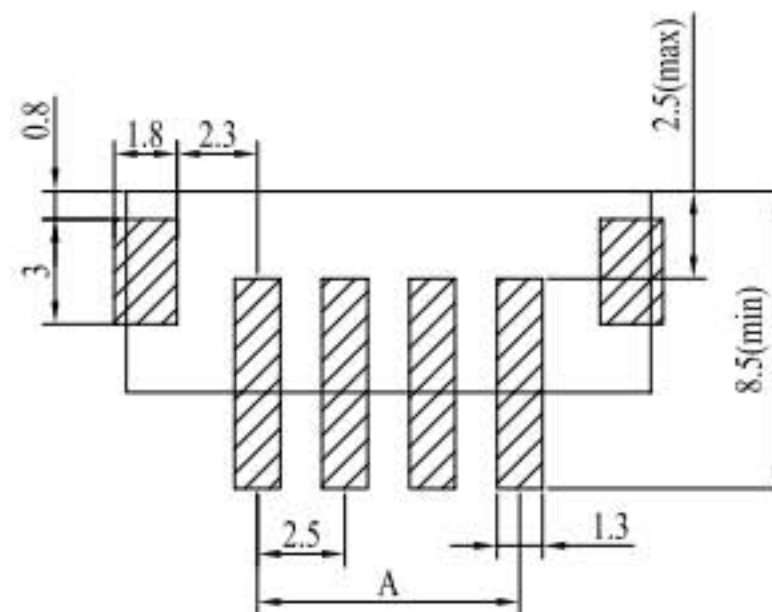

PCB板安装尺寸

- ◆ 额定电压: 250V AC DC
Voltage rating: 250V AC DC
- ◆ 额定电流: 3.0A AC DC #22
Current rating: 3.0A AC DC #22
- ◆ 耐压值: 1000V AC/minute
Withstand voltage 1000V AC/minute
- ◆ 绝缘电阻: 1000M Ω MIN
Insulation resistance: 1000M Ω MIN
- ◆ 接触电阻: 0.02 Ω MAX
Contact resistance: 0.02 Ω MAX
- ◆ 工作温度: -25°C ~ +85°C
Working Temperature: -25°C ~ +85°C
- ◆ 间距: 2.5 mm
Pitch: 2.5mm

- ◆ 绝缘体: 尼龙9T UL94V-0
Insulator: PA9T UL94V-0
- ◆ 接触针: 黄铜
Contact PIN: Brass
- ◆ 焊片: 黄铜
Solder tab :: Brass

勝特力材料 886-3-5773766
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100v.com.tw](http://www.100v.com.tw)

GENERAL TOLERANCE		SCALE		DRAWING 张勤国		DATE 20140719		DWG. NO. FAXH		TITLT. 成品图		REV. A	
XX. ±0.25	XXX. ±0.40	UNIT mm		CHECK 赵阿权		DATE 20140719		PARTS NO. XH-LT-NA				SHEET. 1/1	
X. ±0.20	XXX. ±0.05			APPROVE 丁泽宝		DATE 20140719							
.X ±0.15	X.° ±2°	SIZE A4											
XX ±0.10	X.° ±1°												