
編號	產品型號	品牌規格
105759	ZIF-FPC-0.5mm-SMT-48P-上接	ZIF-FPC-0.5mm-SMT-48P臥上接 180度的抽拉式(即抽屜式用推的
105760	ZIF-FPC-0.5mm-SMT-48P-下接	ZIF-FPC-0.5mm-SMT-48P臥下接 180度的抽拉式(即抽屜式用推的





0.5全包下接（4-60P）

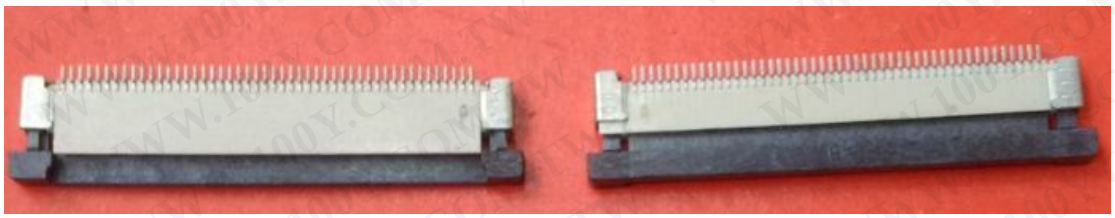

0.5全包上接（4-60P）

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw


ACAD GENERATED DRAWING. DON'T CHANGE BY HAND


PITCH 0.5mm FPC CONNECTOR SMT TYPE


性能:


额定电流：0.4A
额定电压：50V
耐电压：200V
接触电阻：≤20mΩ
绝缘电阻：500MΩ
工作温度：-20℃~+85℃


塑件（材质）：LCP，UL94V-0
锁扣（材质）：LCP，UL94V-0
插簧（材质）：磷青铜，镀锡/镀金
焊片（材质）：磷青铜，镀锡/镀金

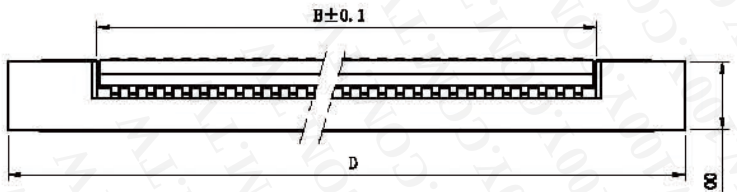


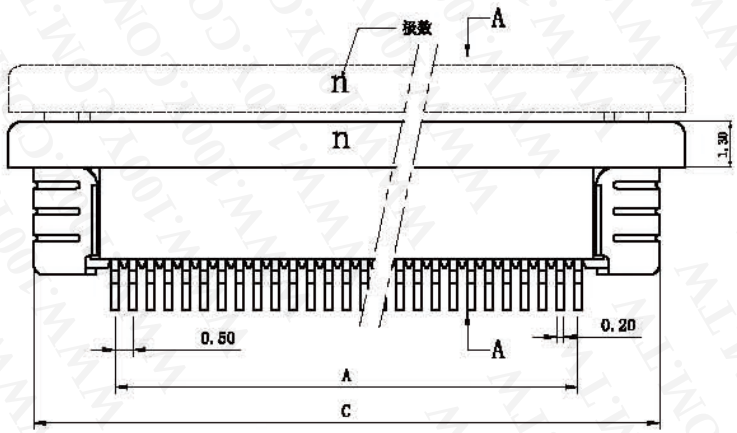




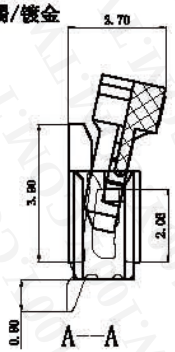


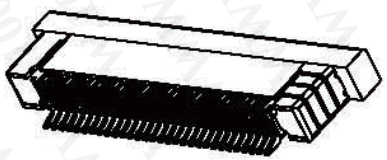



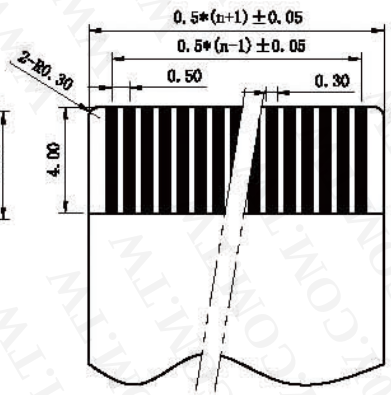

适用扁平电缆

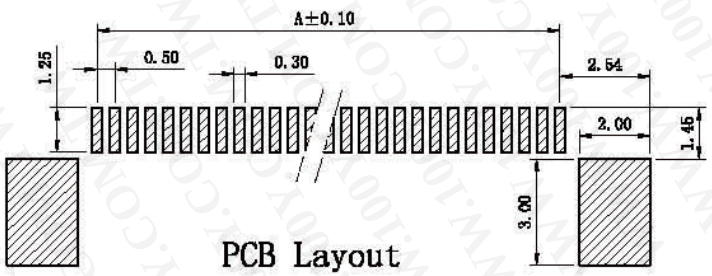

PCB Layout

孔位	A	B	C	D
4	1.50	2.60	6.35	7.65
5	2.00	3.10	6.85	8.15
6	2.50	3.60	7.35	8.65
7	3.00	4.10	7.85	9.15
8	3.50	4.60	8.35	9.65
9	4.00	5.10	8.85	10.15
10	4.50	5.60	9.35	10.65
11	5.00	6.10	9.85	11.15
12	5.50	6.60	10.35	11.65
13	6.00	7.10	10.85	12.15
14	6.50	7.60	11.35	12.65
15	7.00	8.10	11.85	13.15
16	7.50	8.60	12.35	13.65
17	8.00	9.10	12.85	14.15
18	8.50	9.60	13.35	14.65
19	9.00	10.10	13.85	15.15
20	9.50	10.60	14.35	15.65
21	10.00	11.10	14.85	16.15
22	10.50	11.60	15.35	16.65
23	11.00	12.10	15.85	17.15
24	11.50	12.60	16.35	17.65
25	12.00	13.10	16.85	18.15
26	12.50	13.60	17.35	18.65
27	13.00	14.10	17.85	19.15
28	13.50	14.60	18.35	19.65
29	14.00	15.10	18.85	20.15
30	14.50	15.60	19.35	20.65
31	15.00	16.10	19.85	21.15
32	15.50	16.60	20.35	21.65
33	16.00	17.10	20.85	22.15
34	16.50	17.60	21.35	22.65
35	17.00	18.10	21.85	23.15
36	17.50	18.60	22.35	23.65
37	18.00	19.10	22.85	24.15
38	18.50	19.60	23.35	24.65
39	19.00	20.10	23.85	25.15
40	19.50	20.60	24.35	25.65
41	20.00	21.10	24.85	26.15
42	20.50	21.60	25.35	26.65
43	21.00	22.10	25.85	27.15
44	21.50	22.60	26.35	27.65
45	22.00	23.10	26.85	28.15
46	22.50	23.60	27.35	28.65
47	23.00	24.10	27.85	29.15
48	23.50	24.60	28.35	29.65
49	24.00	25.10	28.85	30.15
50	24.50	25.60	29.35	30.65
51	25.00	26.10	29.85	31.15
52	25.50	26.60	30.35	31.65
53	26.00	27.10	30.85	32.15
54	26.50	27.60	31.35	32.65
55	27.00	28.10	31.85	33.15
56	27.50	28.60	32.35	33.65
57	28.00	29.10	32.85	34.15
58	28.50	29.60	33.35	34.65
59	29.00	30.10	33.85	35.15
60	29.50	30.60	34.35	35.65

X ± 0.3	X° ± 5°	UNITS mm	NAME (INTENDED USE): 0.5mm FPC (A 型)下接
.X ± 0.25	.X° ± 2°	MAT'L	PART NO. (INTENDED USE): 0.5K-AX-nPWH
.XX ± 0.20	.XX° ± 1°	FINISH	APPD:
.XXX ± 0.10	.XXX° ± 0.5°	Q'TY	CHKD:
			DR: YLZ 2011.09.28

TITLE: 0.5mm FPC (A 型)下接


DWG NO.: 050K05-AXB0000000


SCALE	SHEET	REV.
1/1	1/1	A


THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE RUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE RUI ELECTRON FACTORY


ACAD GENERATED DRAWING. DON'T CHANGE BY HAND

PITCH 0.5mm FPC CONNECTOR SMT TYPE

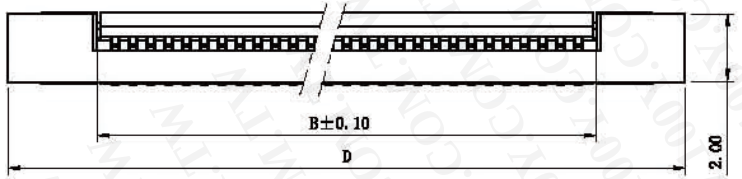

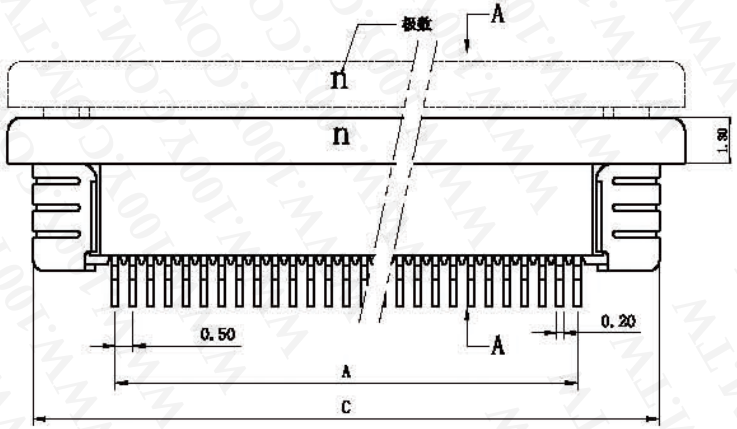






性能：


- 额定电流：0.4A
- 额定电压：50V
- 耐电压：200V
- 接触电阻：≤20mΩ
- 绝缘电阻：500MΩ
- 工作温度：-20℃～+85℃


- 塑件（材质）：LCP，UL94V-0
- 锁扣（材质）：LCP，UL94V-0
- 插簧（材质）：磷青铜，镀锡/镀金
- 焊片（材质）：磷青铜，镀锡/镀金


孔位	A	B	C	D
4	1.50	2.60	6.35	7.65
5	2.00	3.10	6.85	8.15
6	2.50	3.60	7.35	8.65
7	3.00	4.10	7.85	9.15
8	3.50	4.60	8.35	9.65
9	4.00	5.10	8.85	10.15
10	4.50	5.60	9.35	10.65
11	5.00	6.10	9.85	11.15
12	5.50	6.60	10.35	11.65
13	6.00	7.10	10.85	12.15
14	6.50	7.60	11.35	12.65
15	7.00	8.10	11.85	13.15
16	7.50	8.60	12.35	13.65
17	8.00	9.10	12.85	14.15
18	8.50	9.60	13.35	14.65
19	9.00	10.10	13.85	15.15
20	9.50	10.60	14.35	15.65
21	10.00	11.10	14.85	16.15
22	10.50	11.60	15.35	16.65
23	11.00	12.10	15.85	17.15
24	11.50	12.60	16.35	17.65
25	12.00	13.10	16.85	18.15
26	12.50	13.60	17.35	18.65
27	13.00	14.10	17.85	19.15
28	13.50	14.60	18.35	19.65
29	14.00	15.10	18.85	20.15
30	14.50	15.60	19.35	20.65
31	15.00	16.10	19.85	21.15
32	15.50	16.60	20.35	21.65
33	16.00	17.10	20.85	22.15
34	16.50	17.60	21.35	22.65
35	17.00	18.10	21.85	23.15
36	17.50	18.60	22.35	23.65
37	18.00	19.10	22.85	24.15
38	18.50	19.60	23.35	24.65
39	19.00	20.10	23.85	25.15
40	19.50	20.60	24.35	25.65
41	20.00	21.10	24.85	26.15
42	20.50	21.60	25.35	26.65
43	21.00	22.10	25.85	27.15
44	21.50	22.60	26.35	27.65
45	22.00	23.10	26.85	28.15
46	22.50	23.60	27.35	28.65
47	23.00	24.10	27.85	29.15
48	23.50	24.60	28.35	29.65
49	24.00	25.10	28.85	30.15
50	24.50	25.60	29.35	30.65
51	25.00	26.10	29.85	31.15
52	25.50	26.60	30.35	31.65
53	26.00	27.10	30.85	32.15
54	26.50	27.60	31.35	32.65
55	27.00	28.10	31.85	33.15
56	27.50	28.60	32.35	33.65
57	28.00	29.10	32.85	34.15
58	28.50	29.60	33.35	34.65
59	29.00	30.10	33.85	35.15
60	29.50	30.60	34.35	35.65

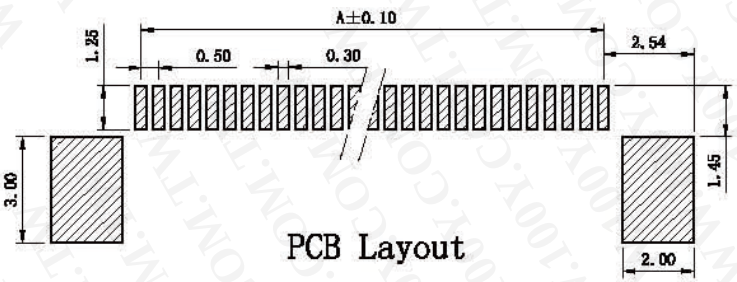

PCB Layout

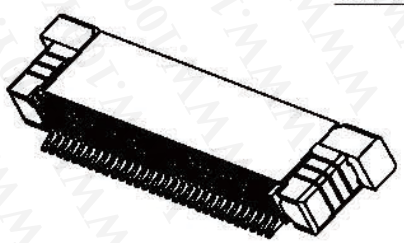



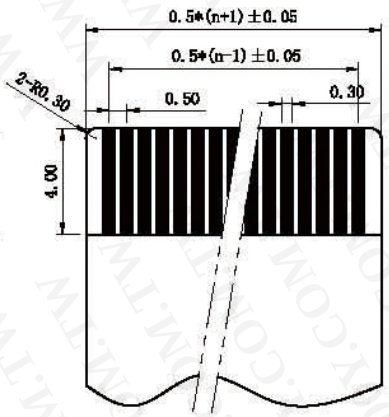

适用扁平电缆

X. ± 0.3	X° ± 5°	UNITS mm	NAME (INTENDED USE) 0.5mm FPC (A 型)上接	
.X ± 0.25	.X° ± 2°	MAT'L	PART NO. (INTENDED USE) 0.5K-AS-nPWH	TITLE: 0.5mm FPC (A 型)上接
.XX ± 0.20	.XX° ± 1°	FINISH	APPD:	DWG NO.: 050K04-ASB0000000
.XXX ± 0.10	.XXX° ± 0.5°	Q'TY	CHKD:	SCALE 1/1 · SHEET 1/1 · REV. A
THESE DRAWINGS AND SPECIFICATIONS ARE THE PROPERTY OF DE HUI ELECTRON FACTORY AND SHALL NOT BE REPRODUCED, COPIED OR USED IN ANY MANNER WITHOUT THE PRIOR WRITTEN CONSENT OF DE HUI ELECTRON FACTORY			DR: YLZ 2011.09.28	

WWW.100Y.COM.TW