


10		9		8		7	6	5	4	3		2		1
LOOSE PIECE		TAPE MOUNTED		DIMENSIONS				DIMENSIONS						FINISH
MATERIAL NUMBER	ENGINEERING NUMBER	MATERIAL NUMBER	ENGINEERING NUMBER	STUD SIZE	S ±.005	W MAX	C MIN	ID MIN	MWID	B REF	L MAX	H REF	T REF	INSULATION COLOR
191270007	AA-815-06	191270009	AA-815-06T	6	.146/3.71	.301/7.6	.207/5.3	.054/1.37	.138/3.51	.400/10.16	.781/19.84	.08/2.0	.031/0.79	RED
191270010	AA-815-08	191270011	AA-815-08T	8	.173/4.39	.301/7.6	.207/5.3	.054/1.37	.138/3.51	.400/10.16	.781/19.84	.08/2.0	.031/0.79	RED
191270012	AA-815-10	191270013	AA-815-10T	10	.198/5.03	.301/7.6	.207/5.3	.054/1.37	.138/3.51	.400/10.16	.781/19.84	.08/2.0	.031/0.79	RED
191270039	BB-816-06	191270041	BB-816-06T	6	.146/3.71	.301/7.6	.209/5.3	.081/2.06	.165/4.19	.400/10.16	.810/20.32	.08/2.0	.031/0.79	BLUE
191270042	BB-816-08	191270044	BB-816-08T	8	.173/4.39	.301/7.6	.209/5.3	.081/2.06	.165/4.19	.400/10.16	.810/20.32	.08/2.0	.031/0.79	BLUE
191270099	BB-816-10	— — — —	— — — —	10	.198/5.03	.301/7.6	.209/5.3	.081/2.06	.165/4.19	.400/10.16	.810/20.32	.08/2.0	.031/0.79	BLUE
— — — —	— — — —	— — — —	— — — —	— — — —	— — — —	— — — —	— — — —	— — — —	— — — —	— — — —	— — — —	— — — —	— — — —	— — — —
191270086	C-817-08	191270087	C-817-08T	8	.173/4.39	.385/9.8	.270/6.85	.128/3.25	.225/5.71	.560/14.22	1.046/26.57	.10/2.5	.040/1.02	YELLOW
191270089	C-817-10	191270090	C-817-10T	10	.209/5.3	.385/9.8	.270/6.85	.128/3.25	.225/5.71	.560/14.22	1.046/26.57	.10/2.5	.040/1.02	YELLOW

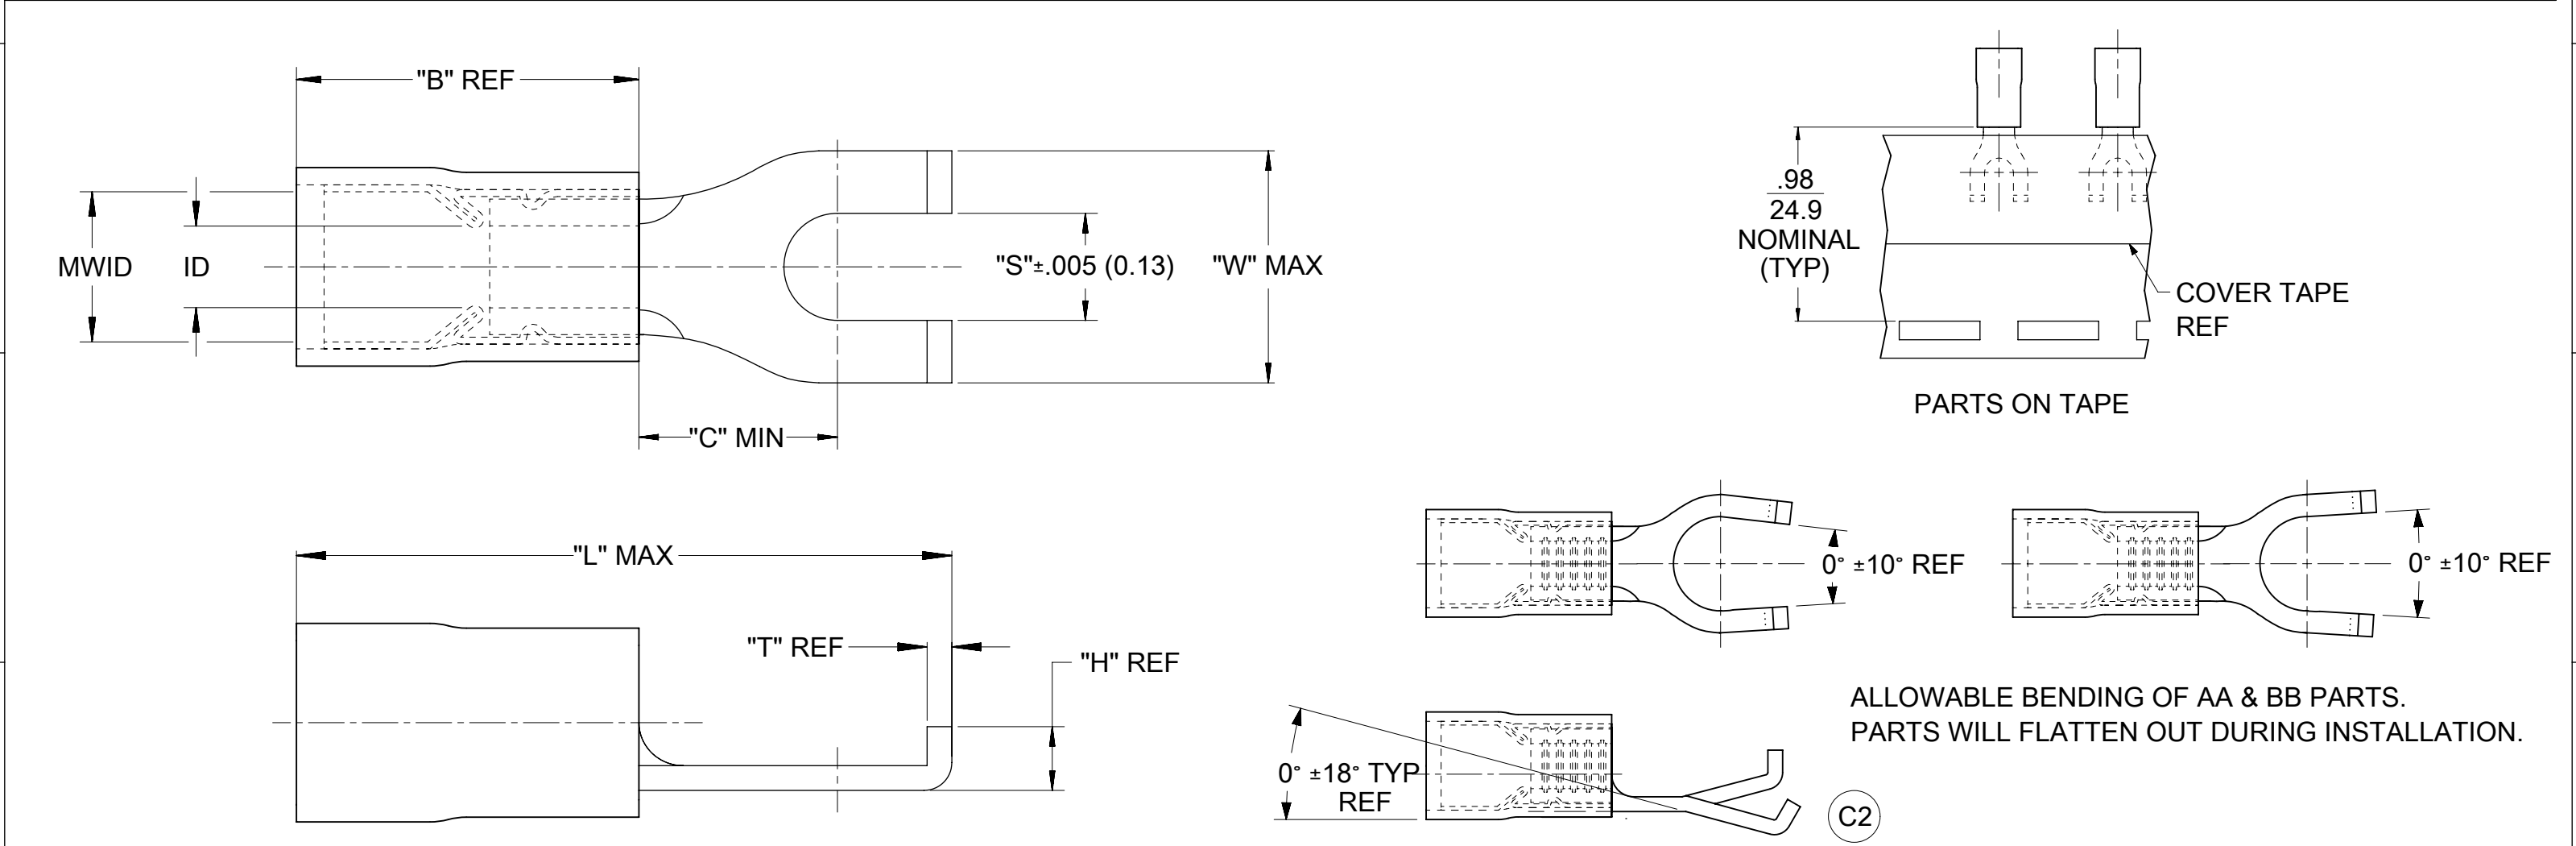

NOTES:

1. MATERIAL: COPPER
2. PLATING: ELECTRO-TIN
3. MWID = MAXIMUM WIRE INSULATION DIAMETER
4. PART IS RoHS COMPLIANT

勝特力電材超市-龍山店 886-3-5773766
勝特力電材超市-光復店 886-3-5729570
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
<http://www.100y.com.tw>

THIS DRAWING CONTAINS INFORMATION THAT IS PROPRIETARY TO MOLEX ELECTRONIC TECHNOLOGIES, LLC AND SHOULD NOT BE USED WITHOUT WRITTEN PERMISSION	
DIMENSION UNITS IN/MM	SCALE 4:1
CURRENT REV DESC: ADD ALLOWABLE BENDING DETAIL VIEW W/ DIM'S..	
GENERAL TOLERANCES (UNLESS SPECIFIED)	
4 PLACES ±	±
3 PLACES ±	± 0.005
2 PLACES ±	± 0.01
1 PLACE ±	± 0.25
0 PLACES ±	±
ANGULAR TOL	± 0.5 °
DRAFT WHERE APPLICABLE MUST REMAIN WITHIN DIMENSIONS	THIRD ANGLE PROJECTION
DRWN: DMYRICK	2022/05/26
CHK'D: JMACNEIL	2022/06/01
APPR: JMACNEIL	2022/06/01
INITIAL REVISION:	
DRWN: DLM	2003/08/25
APPR: RWD	2003/08/25
DRAWING	SERIES
B-SIZE	19127
MATERIAL NUMBER	CUSTOMER
SEE TABLE	GENERAL MARKET
DOCUMENT NUMBER	DOC TYPE
SD-19127-003	PSD
DOC PART	REVISION
001	C2
SHEET NUMBER	
1 OF 1	



产品编号：[191270009](#)


Product Description：Avikrimp Flanged
Spade Tongue Terminal for 22-18 AWG Wire,
Stud Size 6 (M3.5), Mylar Tape Carrier

系列号：19127

状态：Active

Product Category：Ring and Spade
Terminals

工程编号：AA-815-06T



文件和资源

图纸

[图纸 191270009_sd.pdf](#)

3D 模型和设计文件

[3D模型 191270009_stp.zip](#)

规格

[产品规格 PS-19902-011-001.pdf](#)

[产品规格 PS-19902-015-001.pdf](#)

产物环境合规

合规

GADSL/IMDS	Not Relevant
China RoHS	
EU ELV	Not Relevant
Low-Halogen Status	Low-Halogen per IEC 61249-2-21
REACH SVHC	Not Contained per D(2023)3788-DC (14 Jun 2023)
EU RoHS	Compliant per EU 2015/863

[多部分产品合规性声明](#)

- Eu RoHS
- REACH SVHC
- Low-Halogen

[多部分行业合规性文件](#)

- IPC 1752A Class C
- IPC 1752A Class D
- Molex Product Compliance Declaration
- IEC-62474
- chemSHERPA (xml)

欧盟 RoHS 合格证书

产品详情

常规

状态	活动
类别	Ring and Spade Terminals
系列	19127
说明	Avikrimp Flanged Spade Tongue Terminal for 22-18 AWG Wire, Stud Size 6 (M3.5), Mylar Tape Carrier
关键字	Spade Terminal, Spade Terminals
产品系列	Solderless Terminals
产品名称	Avikrimp
类型	Spade
UPC	800753098909

机构

CSA	LR18689
UL	E32244

物理

筒型	已关闭
阻燃性	94V-2
绝缘	Nylon (PA)
材料 - 接合部位电镀	Tin
净重	0.801/g
包装形式	Adhesive Tape on Reel
螺柱规格	6 (M3.5)
导线绝缘直径	3.56mm max.
线径规格 (AWG)	18, 20, 22
线缆尺寸mm²	0.25-1.50

进程

无铅	不适用
----	-----

施工工具

全局

描述	产品编号
ATP Crimp Dies for the Tape Crimp Module and ATP-101 & 301 Press	<u>0192880023</u>
Mini-Mac Pneumatic Applicator for Ring and Spade Terminals, 18-22 AWG	<u>0638851300</u>