


REV	DESCRIPTION	DATE
-----	-------------	------

△ DIM. REV.
△ RDC-98091

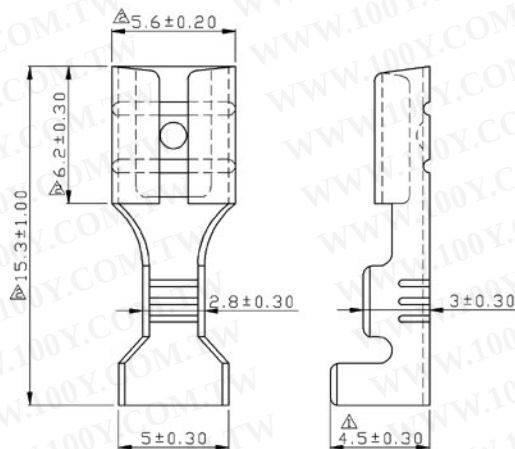

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

NOTE :

1. MAXIMUM ELECTRIC CURRENT :

A.W.G.	22	20	18
AMP.	3	4	7
2. WIRE RANGE : 22-18 A.W.G. (1.5-0.75 mm²)
3. NEMA TAB : 0.032 inch * 0.187 inch (0.8 mm * 4.8 mm)
4. THICKNESS : 0.30 mm



Tolerance Unless Otherwise Specified		
0 ~ 10 mm ± 0.40	ANGLE	
10 ~ 20 mm ± 0.80	0° ±	REF ±
> 20 mm ±	° ±	° ±

NAME	OPEN BARREL DISCONNECTORS	UNIT	mm	
PART NO.	See Chart	MATERIAL	BRASS	APPROVE
NUMBER	KT-970008-C	SCALE	SHEET PAGE	CHECKED
DATE	2008/01/14	5/1	1-2	10F1
				DRAWN

ITEM NO.	SURFACE TREATMENT
604LR(8)	BRASS FINISH
604LT(8)	TIN PLATED