


CPM-1


Unit:mm

SERIES PROBE CPM-1

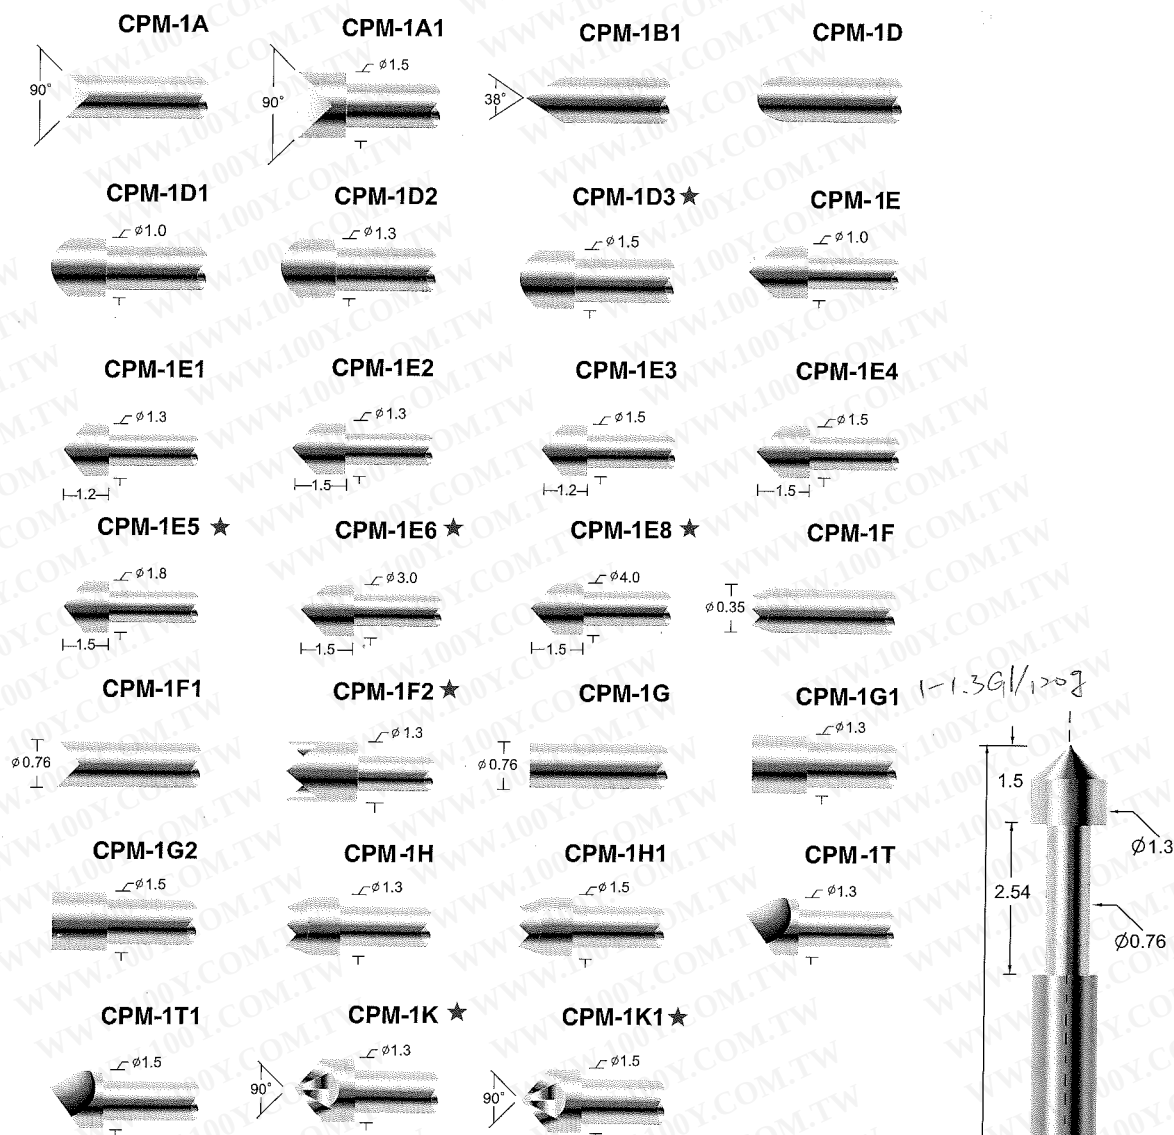

Probe specifications CPM-1

- Recommended min. center (最小間距) : 1.9 (.0748")
- Mounting hole size (鑽孔尺寸) : 1.35 (.0531") / 1.4 (.0551")
- Full travel (行程) : 2.54 (0.1")
- Materials and finishes (材料及塗飾) :
 Plunger : SK, Ni plated, phosphor bronze
 Barrel : Phosphor bronze, Gold plated
 Spring : Stainless Steel
- Current rating (額定電流) : 3A
- Contact resistance (接觸電阻) : 50m Ω
- Spring force (全壓彈力) : 120g
- ★ 為訂製品代號

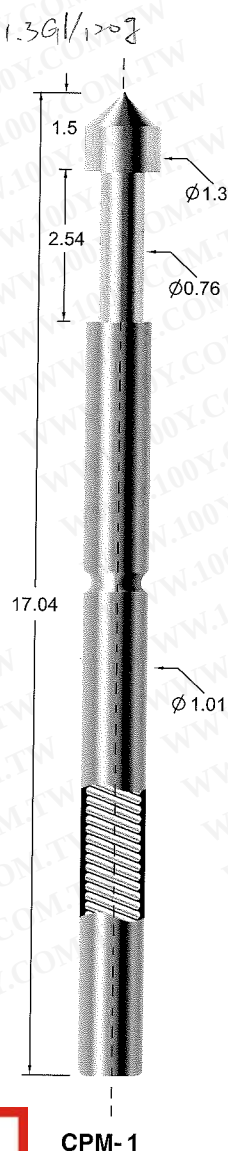

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

CPM-25 R-8

Unit:mm

1809
3009

SERIES PROBE CPM-25 SERIES RECEPTACLE R-8

