
Banana Plug - Uninsulated Panel Mount Threaded Stud

EMERSON Network Power

INCHES (MILLIMETERS)
CUSTOMER DRAWINGS AVAILABLE UPON REQUEST

SPECIFICATIONS
Plug Body: Brass per QQ-B-626D
Plug Spring: Nickel silver per QQ-C-585
Finish: Nickel
Panel Thickness: Up to .25 (6.35) .625 (16.00)
Hardware: Nickel plated nut, stamped tin plated solder terminal (unassembled)
RATINGS
Current: 15 amps
Contact Resistance: 0.010 ohms maximum



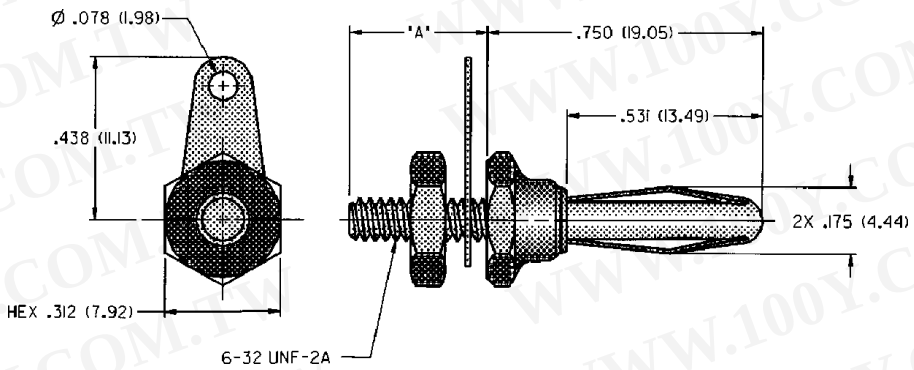

NICKEL PLATING	
108-0750-001	.375 (9.50)

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

For Standard Banana Jack: .166 (4.23) Diameter
FEATURES:
• Two stud lengths adapt to different panel sizes
• Pierced hole for up to 14 gauge wire