
DIN Rail terminal blocks ／ DK..-TF series

DK4-TF(5x20)



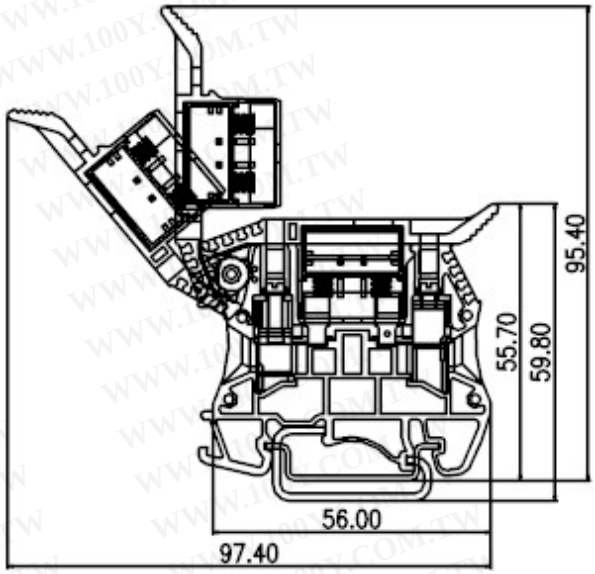

Approval		
Technical Data	UL	IEC
Rated voltage	300V	300V
Rated current	16A	6.3A
Conductor cross-section, solid (AWG / mm^2)	24~12 / 0.5~4	
Conductor cross-section, flexible (AWG / mm^2)	24~12 / 0.5~4	
Rated impulse withstand voltage	6KV	
Torque (N-m)	0.8	
Screw	M3	
Wire strip length	10~12mm	
Insulating material	PA	
TxHxW (mm)	8x 54.8 x 56	

Optional color	Cat. No.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

	Accessories	Cat. No.
End cover		DK4C-TF
Partition		
Small partition		
Insertion bridge	2 way 3 way 4 way 10 way	
Insertion bridge	2 way 3 way 4 way 10 way	CSC-602N CSC-603N CSC-604N CSC-610N
Screw-on bridge	2 way 3 way 4 way 10 way	
Marking label		TM28
Mounting Rail		TS-35 / TS-32
Tool		0.5 x 3mm

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw