

DIN Rail terminal blocks ／ DK..-TR series

DK1.5-TR

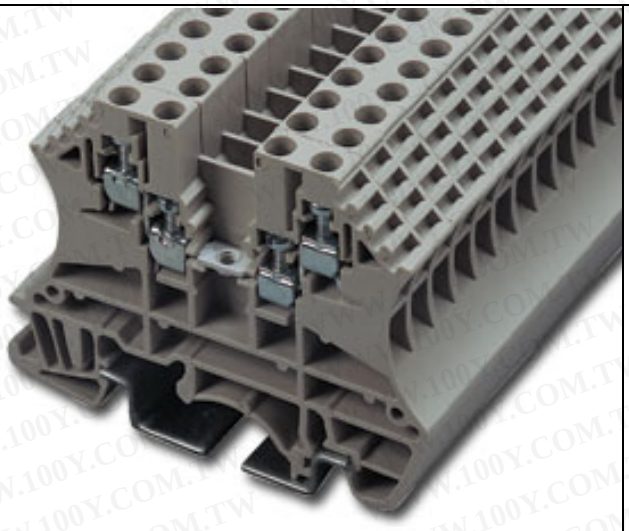

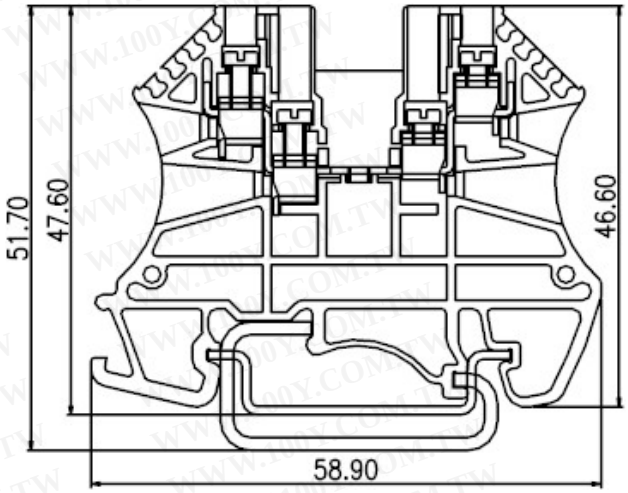

Approval		
Technical Data	UL	IEC
Rated voltage	300V	630V
Rated current	10A	17.5A
Conductor cross-section, solid (AWG / mm^2)	22~14 / 0.5~1.5	
Conductor cross-section, flexible (AWG / mm^2)	22~14 / 0.5~1.5	
Rated impulse withstand voltage	8KV	
Torque (N-m)	0.4	
Screw	M2.5	
Wire strip length	6~7mm	
Insulating material	PA	
TxHxW (mm)	5.1 x 46.8 x 58.9	

Optional color	Cat. No.
●	DK1.5-TR-RD
●	DK1.5-TR-BL
●	DK1.5-TR-BK
●	DK1.5-TR-OR

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

	Accessories	Cat. No.
End cover		DK1.5C-TR
Partition		
Small partition		
Insertion bridge	2 way 3 way 4 way 10 way	
Insertion bridge	2 way 3 way 4 way 10 way	CSC-2.502 CSC-2.503 CSC-2.504 CSC-2.510
Screw-on bridge	2 way 3 way 4 way 10 way	DS2.5-02P DS2.5-03P DS2.5-04P DS2.5-10P
Marking label		TM26
Mounting Rail		TS-35 / TS-32
Tool		0.4 x 2.5mm

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw