

圓型&Y 型裸端子




型号 ITEM NO.	STUD SIZE 螺栓口径 美制螺栓号		尺寸 DIMENSION mm								包装 PCS/ PACK	使用工具 USE THE TOOLS	说明 EXPLANATION
	Metric	American	d2	W	F	L	H	d1	D	T			
HRNB3.5-4	4	#8	4.3	8.0	7.7	17.7	6.0	3.0	5.0	1.0	1000	HX-10 AN-10 AP-10 FSB-056TD	端头材质: 紫铜 导线截面:2.5-4mm² 最大电流:I _{max} =37A Wire range : 2.5-4mm² A. W. G. : (14-12) Max.current=37A
HRNB3.5-5S	5	#10	5.3										
HRNB3.5-5L	5	#10	5.3										
HRNB3.5-6	6	1/4 "	6.5										
HRNB3.5-8	8	5/16 "	8.5										
HRNB3.5-10	10	3/8 "	10.5										
HRNB3.5-12	12	1/2 "	13.0	19.2	16.0	31.6	6.8	3.5	5.5	1.0	1000	HX-10 AN-10 AP-10 FSB-056TD	端头材质: 紫铜 导线截面:4-6mm² 最大电流:I _{max} =48A Wire range : 4-6mm² A. W. G. : (12-10) Max.current=48A
HRNB5.5-3.2	3	#4	3.2	7.2	5.9	16.3							
HRNB5.5-3.7	3.5	#6	3.7										
HRNB5.5-4S	4	#8	4.3	9.5	8.85	19.6							
HRNB5.5-4L	4	#8	4.3										
HRNB5.5-5	5	#10	5.3	9.5	8.85	19.6							
HRNB5.5-6	6	1/4 "	6.5	12.0	10.5	22.5							
HRNB5.5-6M	6	1/4 "	6.5				13.0	25.0					
HRNB5.5-8	8	5/16 "	8.5	15.0	13.5	27.0							
HRNB5.5-10	10	3/8 "	10.5										
HRNB5.5-12	12	1/2 "	13.0	19.2	16.0	31.6	6.0	3.5	5.5	1.0	500	FSB-056TD	
HRNB5.5-14	14	9/16 "	15.0	32.0	25.2	47.2	6.0	3.5	5.5	1.0	250		
HRNB5.5-16	16	5/8 "	17.0										
HRNB5.5-20	20	3/4 "	21.0										

端头材质: 紫铜
导线截面: 10-35mm²
最大电流: I_{max}=160A

RING TERMINALS
JIS 2805

- Material
- Terminal Body: Copper
- Plating: Tin

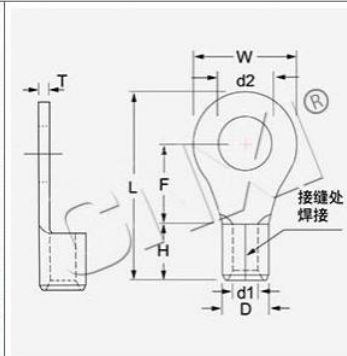

型号 ITEM NO.	STUD SIZE 螺孔口直径 美制螺线号		尺寸 DIMENSION mm								包装 PCS/ PACK	使用工具 USE THE TOOLS	说明 EXPLANATION
	Metric	American	d2	W	F	L	H	d1	D	T			
HRNB14-4	4	#8	4.3	12.0	13.3	29.8	10.5	6.0	9.3	1.5	500	HX-50B CT-80 FSC-616TD	端头材质: 紫铜 导线截面: 10-16mm² 最大电流: I _{max} =88A Wire range : 10-16mm² A. W. G. : (6) Max.current=88A
HRNB14-5	5	#10	5.3										
HRNB14-6S	6	1/4 "	6.5										
HRNB14-6L	6	1/4 "	6.5	16.0	14.0	32.5	10.5	6.0	9.0	1.5	250		
HRNB14-8	8	5/16 "	8.5										
HRNB14-10	10	3/8 "	10.5										
HRNB14-10L	10	3/8 "	10.5	22.0	19.5	41.0	10.5	6.0	9.0	1.5	250		
HRNB14-12	12	1/2 "	13.0										
HRNB14-14	14	9/16 "	15.0										
HRNB14-16	16	5/8 "	17.0	28.0	24.0	48.5	10.5	6.0	9.0	1.5	250		
HRNB14-20	20	3/4 "	21.0										

HRNB22-4	4	#8	4.3	12.2	15.1	33.2	12.0	8.1	11.5	1.7	250	HX-50B CT-80	端头材质: 紫铜 导线截面:16-25mm ² 最大电流:I _{max} =115A Wire range : 16-25mm ² A. W. G. : (4) Max.current=115A
HRNB22-5S	5	#10	5.3										
HRNB22-5L	5	#10	5.3										
HRNB22-6S	6	1/4 "	6.5	16.5	13.5	33.7							
HRNB22-6L	6	1/4 "	6.5										
HRNB22-8	8	5/16 "	8.5										
HRNB22-10	10	3/8 "	10.5										
HRNB22-10L	10	3/8 "	10.5	22.0	19.5	42.5	12.0	8.1	11.5	1.7	200		
HRNB22-12	12	1/2 "	13.0										
HRNB22-14	14	9/ 16 "	15.0										
HRNB22-16	16	5/8 "	17.0	28.0	24.0	50.0	12.0	8.1	11.5	1.7	200		
HRNB22-20	20	3/4 "	21.0										
HRNB38-5	5	#10	5.3	15.3	17.4	39.0	14.0	9.7	13.3	1.8	200	HX-50B CT-80	端头材质: 紫铜 导线截面:35mm ² 最大电流:I _{max} =160A Wire range : 35mm ² A. W. G. : (2) Max.current=160A
HRNB38-6	6	1/4 "	6.5										
HRNB38-6L	6	1/4 "	6.5	22.0	17.7	42.7	14.0	9.7	13.3	1.8	100		
HRNB38-8S	8	5/16 "	8.5	15.3	17.4	39.0	14.0	9.7	13.3	1.8	200		
HRNB38-8L	8	5/16 "	8.5	22.0	17.7	42.7	14.0	9.7	13.3	1.8	100		
HRNB38-10	10	3/8 "	10.5	15.3	17.4	39.0	14.0	9.7	13.3	1.8	200		
HRNB38-10L	10	3/8 "	10.5	22.0	17.7	42.7	14.0	9.7	13.3	1.8	100		
HRNB38-12	12	1/2 "	13.0										
HRNB38-14	14	9/ 16 "	15.0										
HRNB38-16	16	5/8 "	17.0	28.0	24.0	52.0	14.0	9.7	13.3	1.8	100		
HRNB38-20	20	3/4 "	21.0										




叉形裸端头HSNB系列(TU型)

端头材质: 紫铜
导线截面: 2.5-25mm²
最大电流: I_{max}=115A



产品详情

SPADE TERMINALS

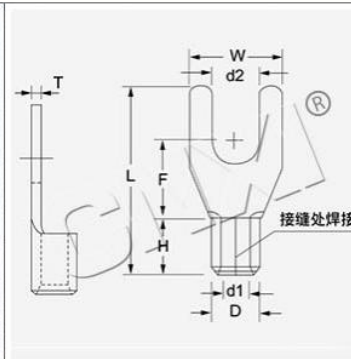

©Material

③Terminal Body: Copper

③Plating: Tin



RoHS

型号 ITEM NO.	STUD SIZE 螺线口直径 美制螺线号		尺寸 DIMENSION mm								包装 PCS/ PACK	使用工具 USE THE TOOLS	说明 EXPLANATION	
	Metric	American	d2	W	F	L	H	d1	D	T				
HSNB3.5-3.2	3.2	#6	3.2	5.7	8.0	7.7	18.3	6.0	3.0	5.0	1.0	1000	HX-10 AN-10 AP-10 FSB-056TD	端头材质: 紫铜 导线截面: 2.5-4mm² 最大电流:Imax=37A Wire range : 2.5-4mm² A. W. G. : (14-12) Max.current=37A
HSNB3.5-3.7	3.5	#6	3.7											
HSNB3.5-4	4	#8	4.3	10.5	12.5	26.5	6.0	3.5	5.5	1.0	1000	HX-10 AN-10 AP-10 FSB-056TD	端头材质: 紫铜 导线截面: 4-6mm² 最大电流:Imax=48A Wire range : 4-6mm² A. W. G. : (10-12) Max.current=48A	
HSNB3.5-5	5	#10	5.3											
HSNB3.5-6	6	1/4 "	6.5	12.0	9.1	21.5	6.0	3.5	5.5	1.0	1000	HX-10 AN-10 AP-10 FSB-056TD	端头材质: 紫铜 导线截面: 6-10mm² 最大电流:Imax=62A Wire range : 6-10mm² A. W. G. : (8) Max.current=62A	
HSNB3.5-8	8	5/16 "	8.5	14.0	11.5	23.7								
HSNB3.5-10	10	3/8 "	10.5	17.5	12.5	26.5	6.0	3.5	5.5	1.0	1000	HX-10 AN-10 AP-10 FSB-056TD	端头材质: 紫铜 导线截面: 10-16mm² 最大电流:Imax=88A Wire range : 10-16mm² A. W. G. : (6) Max.current=88A	
HSNB5.5-3.7S	3.5	#6	3.7	7.2	7.5	17.4								
HSNB5.5-3.7	3.5	#6	3.7	8.3	7.0	18.5	6.0	3.5	5.5	1.0	1000	HX-10 AN-10 AP-10 FSB-056TD	端头材质: 紫铜 导线截面: 16-25mm² 最大电流:Imax=115A Wire range : 16-25mm² A. W. G. : (4) Max.current=115A	
HSNB5.5-4SSS	4	#8	4.3	6.3	7.5	17.4								
HSNB5.5-4S	4	#8	4.3	8.3	7.0	18.5	6.0	3.5	5.5	1.0	1000	HX-10 AN-10 AP-10 FSB-056TD	端头材质: 紫铜 导线截面: 16-25mm² 最大电流:Imax=115A Wire range : 16-25mm² A. W. G. : (4) Max.current=115A	
HSNB5.5-4L	4	#8	4.3	9.0	7.0	18.5								
HSNB5.5-5	5	#10	5.3				12.0	12.0	24.7					
HSNB5.5-6S	6	1/4 "	6.5	14.0	11.5	23.7	6.0	3.5	5.5	1.0	1000	HX-10 AN-10 AP-10 FSB-056TD	端头材质: 紫铜 导线截面: 16-25mm² 最大电流:Imax=115A Wire range : 16-25mm² A. W. G. : (4) Max.current=115A	
HSNB5.5-6L	6	1/4 "	6.5	17.5	12.5	26.5								
HSNB5.5-8	8	5/16 "	8.5	17.5	12.5	26.5	6.0	3.5	5.5	1.0	1000	HX-10 AN-10 AP-10 FSB-056TD	端头材质: 紫铜 导线截面: 16-25mm² 最大电流:Imax=115A Wire range : 16-25mm² A. W. G. : (4) Max.current=115A	
HSNB5.5-10	10	3/8 "	10.5	17.5	12.5	26.5								
HSNB8-4	4	#8	4.3	9.0	7.6	20.8	8.5	4.8	7.2	1.2	1000	HX-50B CT-80 FSC-616TD	端头材质: 紫铜 导线截面: 10-16mm² 最大电流:Imax=88A Wire range : 10-16mm² A. W. G. : (6) Max.current=88A	
HSNB8-5	5	#10	5.3	9.0	8.1									
HSNB8-6	6	1/4 "	6.5	12.0	9.2	23.8	8.5	4.8	7.2	1.2	1000	HX-50B CT-80 FSC-616TD	端头材质: 紫铜 导线截面: 10-16mm² 最大电流:Imax=88A Wire range : 10-16mm² A. W. G. : (6) Max.current=88A	
HSNB8-8	8	5/16 "	8.5	13.8	10.7	25.4								
HSNB8-10	10	3/8 "	10.5	15.9			9.0	9.5	25.5	10.5	6.0	9	1.5	500
HSNB14-4	4	#8	4.3	11.0	9.5	25.5	10.5	6.0	9					
HSNB14-5	5	#10	5.3	13.8	10.7	28.5								
HSNB14-6	6	1/4 "	6.5	15.9			11.0	9.5	27.8	12	8.1	11.5	1.7	250
HSNB14-8	8	5/16 "	8.5	13.8	10.7	28.5								
HSNB14-10	10	3/8 "	10.5	15.9			11.0	9.5	27.8	12	8.1	11.5	1.7	250
HSNB22-5	5	#10	5.3	16.5	13.5	33.5	12	8.1	11.5					
HSNB22-6	6	1/4 "	6.5											
HSNB22-8	8	5/16 "	8.5	16.5	13.5	33.5	12	8.1	11.5	1.7	250	HX-50B CT-80	端头材质: 紫铜 导线截面: 16-25mm² 最大电流:Imax=115A Wire range : 16-25mm² A. W. G. : (4) Max.current=115A	
HSNB22-10	10	3/8 "	10.5											