



鳳凰冷压端头

PHOENIX COLD PRESS TERMINAL

勝特力電材超市-龍山店 886-3-5773766


勝特力電材超市-光復店 886-3-5729570

勝特力电子(上海) 86-21-34970699

勝特力电子(深圳) 86-755-83298787

<http://www.100y.com.tw>

Contents | 目录

	1-2	圓形預絕緣端頭 ROURD SHAPE NAKED TERMINAL
	3	叉形預絕緣端頭 FORK SHAPE PREINSULATION TERMINAL
	4	片形預絕緣端頭 PLATE SHAPE PRE-INSUATION TERMINAL
	5	針形預絕緣端頭 NEEDIE SHAPE TERMINAL
	6	公預絕緣端頭 MALE PRE-INSULATIONTERMINAL
	6	公母鉤形絕緣端頭 HOCK SHAPE PRE-INSULATIONTERMINAL
	7	母預絕緣端頭 FEMALE PER-INSULATION TERMINAL
	7	快速接合连接器 QUICK SPLICE CONNECTORS
	8	全絕緣套端頭 FULL PRE-INSULATION TERMINAL
	8	子彈形母全絕緣端頭 BULLET SHAPE FEMALE FULL INSULATION TERMINAL
	8	子彈形公預絕緣端頭 BULLET SHAPE MALE PRE-INSULATION TERMINAL
	9-10	雙線插入式管形預絕緣端頭 DOUBLE WIRE INSERT TYPE RING PREFAB INSULATED TERMINAL
	11-12	管形裸端頭 PIPE BARE TERMINAL
	13	管形預絕緣端頭 PIPE BARE TERMINAL
	13	絕緣对接连接器 Insulated Butt Connectors
	14	圓形裸端頭 ROUND SHAPE NAKED TERMINAL
	15-20	圓形裸端頭 ROUND SHAPE NAKED TERMINAL
	21-22	叉形裸端頭 FORK SHAPE NAKED TERMINAL
	23	片形裸端頭 PLATE SHAPE NAKED TERMINAL
	24	針形裸端頭 NEEDLE SHAPE NAKED TERMINAL
	25-27	圓形冷壓端頭 CIRCULAR COLD PRESS TERMINAL
	28	叉形冷壓端頭 FORK COLD PRESS TERMINAL
	29	圓形船用裸端頭 BARE CIRCULAR TERMINAL FOR WATERCRAFT
	30	針形冷壓端頭 PIN COLD TERMINAL
	31	C45杆片焊縫 C45 INSERTING SLICE WELDING SEAM
	31	旋上式線螺母接头(内置弹簧的翅膀式) SCREW-ON WIRE NUT CONNECTORS (WING TYPE WITH SPRING INSERT)
	32	冷壓端子护套 COLD PRESS TERMINAL SHEATH
	32	OT 銅開口接線鼻 OT COPPER OPEN CONNECTING NOSE/GT-1
	33	DTL 系列銅鋁接線端子 DTL COPPER-ALUMINIUM CONNECTING TERMINALS
	33	DT 系列銅接線端子(堵油型) DT COPPER CONNECTING TERMINALS
	34	DT 系列鋁接線端子(堵油型) DT ALUMINIUM CONNECTING TERMINALS
	34	JG 銅接線端頭 JG COPPER CONNECTION TERMINAL
	34	SC(JGK) SC(JGA) 引進銅接線端頭 SC(JGK) SC(JGA) IMPORT COPPER TERMINAL



圆形预绝缘端头 ROUND SHAPE NAKED TERMINAL

绝缘材料: 绝缘 PVC

绝缘颜色

22-16 A.W.G:红色 16-14 A.W.G:蓝色


端子材料: 紫铜

INSULATON MATERIAL: VINYL

INSULATION COLOR

22-16 A.W.G: RED 16-14 A.W.G: BLUE

TERMINAL MATERIAL: COPPER



线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 英寸 DIMENSION inch mm							
		Φ		B	F	L	E	D	C	T	
22-16 A.W.G. 0.5-1.5 mm ²	RV1-3.2	#4	.126 3.2	.216 5.5	.197 5.0	.689 17.5	.394 10.0	.157 4.0	.067 1.7	.030 0.75	
	RVS1-3.7	#6	.146 3.7								
	RVM1-3.7	#6	.146 3.7	.260 6.6	.248 6.3	.764 19.4					
	RVL1-3.7	#6	.146 3.7	.315 8.0	.276 7.0	.819 20.8					
	RVS1-4	#8	.169 4.3	.260 6.6	.248 6.3	.764 19.4					
	RVL1-4	#8	.169 4.3	.315 8.0	.276 7.0	.819 20.8					
	RV1-5	#10	.209 5.3								
	RVL1-5	#10	.209 5.3	.457 11.6	.433 11.0	1.055 26.8					
	RV1-6	1/4	.252 6.4								
	RV1-8	5/16	.331 8.4								
	RV1-10	3/8	.413 10.5	.535 13.6	.547 13.9	1.201 30.5					
	RV1-12	1/2	.512 13.0	.756 19.2	.630 16.0	1.394 35.4					
	RV1-14	9/16	.591 15.0	1.063 27.0	.827 21.0	1.744 44.3				.031 0.8	
	RV1-16	5/8	.669 17.0								
	RV1-20	3/4	.827 21.0								
16-14 A.W.G. 1.5-2.5 mm ²	RV2-3.2	#4	.126 3.2	.260 6.6	.189 4.8	.701 17.8	.394 10.0	.177 4.5	.091 2.3	.031 0.8	
	RVS2-3.7	#6	.146 3.7		.248 6.3	.764 19.4					
	RVM2-3.7	#6	.146 3.7								
	RVL2-3.7	#6	.146 3.7	.335 8.5	.307 7.8	.858 21.8					
	RVS2-4	#8	.169 4.3	.260 6.6	.248 6.3	.764 19.4					
	RVL2-4	#8	.169 4.3	.335 8.5	.307 7.8	.858 21.8					
	RVS2-5	#10	.209 5.3								
	RVL2-5	#10	.209 5.3	.374 9.5	.287 7.3	1.055 26.8					
	RV2-6	1/4	.252 6.4	.472 12.0	.433 11.0						



圆形预绝缘端头 ROUND SHAPE NAKED TERMINAL

绝缘材料: 绝缘 PVC

绝缘颜色

16-14 A.W.G:蓝色 14-12A.W.G:黑色 12-10 A.W.G:黄色

端子材料: 紫铜

MAXIMUM ELECTRIC CURRENT:

INSULATION MATERIAL: VINYL

INSULATION COLOR

16-14 A.W.G:BLUE 14-12A.W.G:BLACK 12-10 A.W.G:YELLOW

TERMINAL MATERIAL: COPPER



线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM NO.	饰钮尺寸 STUD SIZE		尺寸 英寸 DIMENSION inch mm						
		φ		B	F	L	E	D	C	T
16-14 A.W.G. 1.5-2.5 mm ²	RV2-8	5/16	.331 8.4	.472 12.0	.433 11.0	1.055 26.8	.394 10.0	.177 4.5	.091 2.3	.031 0.8
	RV2-10	3/8	.413 10.5	.535 13.6	.547 13.9	1.201 30.5				
	RV2-12	1/2	.512 13.0	.756 19.2	.630 16.0	1.394 35.4				
	RV2-14	9/16	.591 15.0	1.063 27.0	.827 21.0	1.744 44.3				
	RV2-16	5/8	.669 17.0							
	RV2-20	3/4	.827 21.0							
14-12 A.W.G. 2.5-4 mm ²	RV3-4	#8	.169 4.3	.315 8.0	.303 7.7	.984 25.0	.512 13.0	.248 6.3	.188 3.0	.039 1.0
	RVS3-5	#10	.209 5.3							
	RVL3-5	#10	.209 5.3	.472 12.0	.370 9.4	1.181 28.4				
	RV3-6	1/4	.252 6.4							
12-10 A.W.G. 4-6 mm ²	RV5-3.7	#6	.146 3.7	.283 7.2	.240 6.1	.894 22.7	.512 13.0	.248 6.3	.134 3.4	.039 1.0
	RVS5-4	#8	.169 4.3							
	RVL5-4	#8	.169 4.3	.374 9.5	.358 9.1	1.047 26.6				
	RV5-5	#10	.209 5.3							
	RV5-6	1/4	.252 6.4	.472 12.0	.413 10.5	1.167 29.5				
	RVM5-6	1/4	.252 6.4		.512 13.0	1.260 32.0				
	RV5-8	5/16	.331 8.4	.591 15.0	.531 13.5	1.339 34.0				
	RV5-10	3/8	.413 10.5							
	RV5-12	1/2	.512 13.0	.756 19.2	.630 16.0	1.520 38.6				
	RV5-14	9/16	.591 15.0							
	RV5-16	5/8	.669 17.0	1.260 32.0	.992 25.2	2.134 54.2				
	RV5-20	3/4	.827 21.0							



叉形预绝缘端头

FORK SHAPE PREINSULATION TERMINAL

绝缘材料: 绝缘 PVC

绝缘颜色

22-16 A.W.G.: 红色 16-14 A.W.G.: 蓝色

14-12 A.W.G.: 黑色 12-10 A.W.G.: 黄色

端子材料: 紫铜


INSULATION MATERIAL: VINYL

INSULATION COLOR

22-16 A.W.G.: RED 16-14 A.W.G.: BLUE

14-12 A.W.G.: BLACK 12-10 A.W.G.: YELLOW

TERMINAL MATERIAL: COPPER



线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						英寸 inch mm	
		φ		B	F	L	E	D	C	T	
22-16 A.W.G. 0.5-1.5 mm ²	SV1-3.2	#4	.126 3.2	.323 5.7	.256 6.5	.827 21.0	.394 10.0	.157 4.0	.067 1.7	.030 0.75	
	SVS1-3.7	#6	.146 3.7								
	SVL1-3.7	#6	.146 3.7	.252 6.4							
	SVLL1-3.7	#6	.146 3.7	.283 7.2							
	SVS1-4	#8	.169 4.3	.252 6.4	.256 6.5	.827 21.0					
	SVM1-4	#8	.169 4.3	.283 7.2							
	SVL1-4	#8	.169 4.3	.319 8.1							
	SVS1-5	#10	.209 5.3								
	SVL1-5	#10	.209 5.3	.374 9.5							.256 6.5
	SVS1-6	1/4	.252 6.4								
	SVL1-6	1/4	.252 6.4	.472 12.0							
16-14 A.W.G. 1.5-2.5 mm ²	SV2-3.2	#4	.126 3.2	.224 5.7	.256 6.5	.827 21.0	.394 10.0	.177 4.5	.091 2.3	.031 0.8	
	SVS2-3.7	#6	.146 3.7								
	SVL2-3.7	#6	.146 3.7	.236 6.0							
	SVLL2-3.7	#6	.146 3.7	.283 7.2							
	SVS2-4	#8	.169 4.3	.252 6.4	.256 6.5						
	SVM2-4	#8	.169 4.3	.283 7.2							
	SVL2-4	#8	.169 4.3	.311 7.9							
	SVS2-5	#10	.209 5.3	.256 6.5	.827 21.0						
	SVL2-5	#10	.209 5.3			.366 9.3					
	SVS2-6	1/4	.252 6.4								
	SVL2-6	1/4	.252 6.4			.472 12.0					.433 11.0
14-12 A.W.G. 2.5-4 mm ²	SV3-3.7	#6	.146 3.7	.315 8.0	.276 7.0	.996 25.3	.512 13.0	.248 6.3	.188 3.0	.039 1.0	
	SV3-4	#8	.169 4.3								
	SV3-5	#10	.209 5.3								
	SV3-6	1/4	.252 6.4	.472 12.0	.358 9.1	1.122 28.5					
12-10 A.W.G. 4-6 mm ²	SVS5-3.7	#6	.146 3.7	.283 7.2	.295 7.5	.961 24.4	.512 13.0	.248 6.3	.134 3.4	.039 1.0	
	SV5-3.7	#6	.146 3.7	.327 8.3	.276 7.0	1.004 25.5					
	SVSS5-4	#8	.169 4.3	.283 7.2	.295 7.5	.961 24.4					
	SVS5-4	#8	.169 4.3	.327 8.3	.276 7.0	1.004 25.5					
	SVL5-4	#8	.169 4.3								
	SV5-5	#10	.209 5.3	.283 9.0							
	SVS5-6	1/4	.252 6.4								
	SVL5-6	1/4	.252 6.4	.472 12.0	.472 12.0	1.240 31.5					
SV5-8	5/16	.315 8.4	.551 14.0	.413 10.5	1.201 30.5						

片形预绝缘端头 PLATE SHAPE PRE-INSULATION TERMINAL

绝缘材料: 绝缘 PVC

绝缘颜色

12-10 A.W.G:黄色 22-16A.W.G:红色 16-14 A.W.G:蓝色


端子材料: 紫铜

INSULATION MATERIAL: VINYL

INSULATION COLOR

12-10 A.W.G: YELLOW 22-16A.W.G: RED 16-14 A.W.G: BLUE

TERMINAL MATERIAL: COPPER

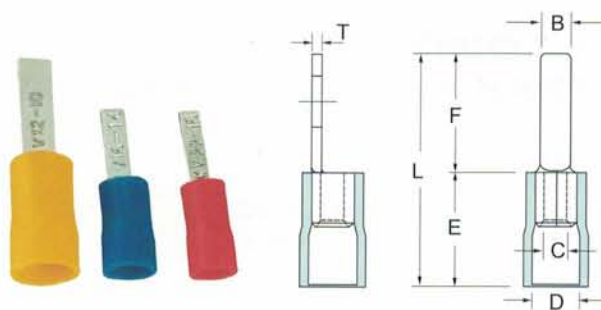

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	尺寸 英寸 DIMENSION inch mm						
		B	F	L	E	D	C	T
22-16 A.W.G. 0.5-1.5 mm ²	DBV1-10	.091 2.3	.394 10.0	.780 19.8	.394 10.0	.157 4.0	.067 1.7	.030 0.75
	DBV1-14	.118 3.0	.551 14.0	.937 23.8				
	DBV1-18	.087 2.2	.709 18.0	1.094 27.8				
16-14 A.W.G. 1.5-2.5 mm ²	DBV2-10	.094 2.4	.394 10.0	.780 19.8	.394 10.0	.177 4.5	.091 2.3	.031 0.8
	DBV2-14	.094 2.4	.551 14.0	.937 23.8				
	DBVL2-14	.118 3.0						
	DBV2-18	.087 2.2	.709 18.0	1.094 27.8				
	DBVL2-18	.110 2.8						
12-10 A.W.G. 4-6mm ²	DBV5-10	.110 2.8	.394 10.0	.906 23.0	.512 13.0	.248 6.3	.134 3.4	.039 1.0
	DBVS5-14	.157 4.0	.551 14.0	1.063 27.0				
	DBV5-14	.177 4.5	.551 14.0					
	DBVS5-18	.079 2.0	.709 18.0	1.120 31.0			.142 3.6	
	DBV5-18	.177 4.5	.709 18.0				.134 3.4	

针形预绝缘端头 NEEDLE SHAPE TERMINAL

绝缘材料: 绝缘 PVC

绝缘颜色


12-10 A.W.G:黄色 22-16A.W.G:红色 16-14 A.W.G:蓝色

端子材料: 紫铜

INSULATION COLOR: VINYL

12-10 A.W.G: YELLOW 22-16A.W.G: RED 16-14 A.W.G: BLUE

TERMINAL MATERIAL: COPPER

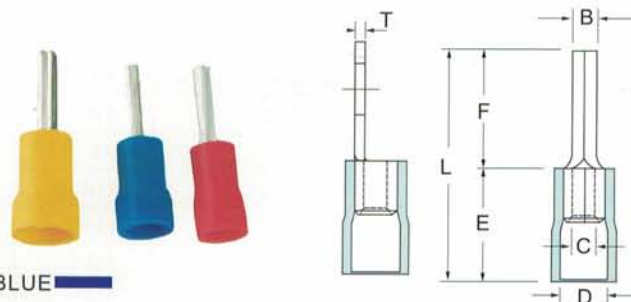

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM NO.	尺寸 英寸 DIMENSION inch mm						
		B	F	L	E	D	C	T
22-16 A.W.G. 0.5-1.5 mm ²	PTV1-10	.075 1.9	.394 10.0	.780 19.8	.394 10.0	.157 4.0	.067 1.7	.030 0.75
	PTV1-13		.512 13.0	.898 22.8				
	PTV1-18		.630 20.0	1.016 30.0				
16-14 A.W.G. 1.5-2.5 mm ²	PTV2-10	.075 1.9	.394 10.0	.780 19.8	.394 10.0	.177 4.5	.091 2.3	.031 0.8
	PTVL2-13		.512 13.0	.898 22.8				
	PTV2-18		.630 20.0	1.024 30.5				
12-10 A.W.G. 4-6 mm ²	PTV5-13	.110 2.8	.551 14.0	1.063 27.0	.512 13.0	.248 6.3	.134 3.4	.039 1.0
	PTV5-18	.110 2.8	20.0	33.0				
	PTV5-20	.110 2.8	23.0	36.0				



公预绝缘端头 MALE PRE-INSULATION TERMINAL

绝缘材料: 绝缘 PVC

绝缘颜色

22-16 A.W.G:红色 16-14A.W.G:蓝色 12-10 A.W.G:黄色

端子材料: 黄铜

22-16 A.W.G:C=1.7mm 16-14A.W.G:C=2.3mm 12-10A.W.G:C=3.4mm


INSULATION COLOR:VINYL TERMINAAMTERIAL.BRASS

INSULATION COLOR:

22-16 A.W.G:RED 16-14A.W.G:BLUE 12-10 A.W.G:YELLOW

TERMINAL MATERIAL:COPPER

22-16 A.W.G:C=1.7mm 16-14A.W.G:C=2.3mm 12-10A.W.G:C=3.4mm

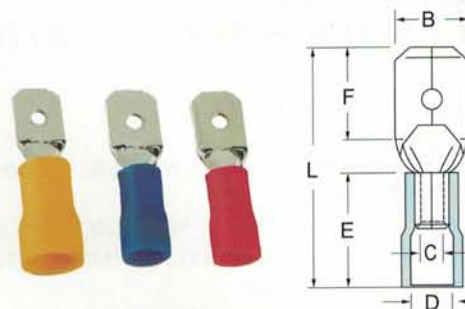

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	头部尺寸	尺寸 DIMENSION				英寸 inch mm	D	T
			B	F	L	E			
22-16 A.W.G. 0.5-1.5 mm ²	MDD1-110(5)	.020×.110 (0.5×2.8)	.110 2.8	.256 6.5	.728 18.5	.394 10.0	.157 4.0	.020 0.5	
	MDD1-110(8)	.032×.110 (0.8×2.8)						.016 0.4	
	MDD1-187(5)	.020×.187 (0.5×4.75)	.189 4.8	.256 6.5	.748 19.0			.020 0.5	
	MDD1-187(8)	.032×.187 (0.8×4.75)						.016 0.4	
	MDD1-250	.032×.250 (0.8×6.35)	.250 6.35	.303 7.7	.827 21.0				
16-14 A.W.G. 1.5-2.5 mm ²	MDD2-187(5)	.020×.187 (0.5×4.75)	.189 4.8	.256 6.5	.748 19.0	.394 10.0	.177 4.5	.020 0.5	
	MDD2-187(8)	.032×.187 (0.8×4.75)						.016 0.4	
	MDD2-250	.032×.250 (0.8×6.35)	.250 6.35	.303 7.7	.827 21.0				
12-10 A.W.G. 4-6 mm ²	MDD5-250	.032×.250 (0.8×6.35)	.250 6.35	.303 7.7	.945 24.0	.512 13.0	.217 5.5	.016 0.4	

公母钩形绝缘端头 HOOK SHAPE PRE-INSULATION TERMINAL

绝缘材料: 绝缘 PVC

绝缘颜色

22-16 A.W.G:红色 16-14A.W.G:蓝色 12-10 A.W.G:黄色

端子材料: 黄铜

22-16 A.W.G:C=1.7mm 16-14A.W.G:C=2.3mm 12-10A.W.G:C=3.4mm


INSULATION COLOR:VINYL TERMINAAMTERIAL.BRASS

INSULATION COLOR:

22-16 A.W.G:RED 16-14A.W.G:BLUE 12-10 A.W.G:YELLOW

TERMINAL MATERIAL:COPPER

22-16 A.W.G:C=1.7mm 16-14A.W.G:C=2.3mm 12-10A.W.G:C=3.4mm

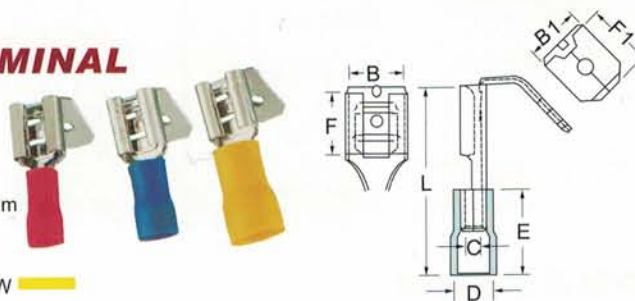

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM NO.	头部尺寸	尺寸 DIMENSION								英寸 inch mm
			B	B1	F	F1	L	E	D	T	
22-16 A.W.G. 0.5-1.5 mm ²	PBDD1-250	.032×.250 (0.8×6.35)	.260 6.6	.250 6.35	.315 8.0	.323 8.2	.866 22.0	.394 10.0	.157 4.0	.016 0.4	
16-14 A.W.G. 1.5-2.5 mm ²	PBDD2-250	.032×.250 (0.8×6.35)	.260 6.6	.250 6.35	.315 8.0	.323 8.2	.866 22.0	.394 10.0	.177 4.5	.016 0.4	
12-10 A.W.G. 4-6 mm ²	PBDD5-250	.032×.250 (0.8×6.35)	.260 6.6	.250 6.35	.315 8.0	.323 8.2	.945 24.0	.512 13.0	.217 5.5	.016 0.4	



母预绝缘端头

FEMALE PRE-INSULATION TERMINAL

绝缘材料: 绝缘 PVC

绝缘颜色

22-16 A.W.G: 红色 16-14 A.W.G: 蓝色 12-10 A.W.G: 黄色

端子材料: 黄铜

22-16 A.W.G: C=1.7mm 16-14 A.W.G: C=2.3mm 12-10 A.W.G: C=3.4mm


INSULATION COLOR: VINYL TERMINAL MATERIAL: BRASS

INSULATION COLOR:

22-16 A.W.G: RED 16-14 A.W.G: BLUE 12-10 A.W.G: YELLOW

TERMINAL MATERIAL: COPPER

22-16 A.W.G: C=1.7mm 16-14 A.W.G: C=2.3mm 12-10 A.W.G: C=3.4mm

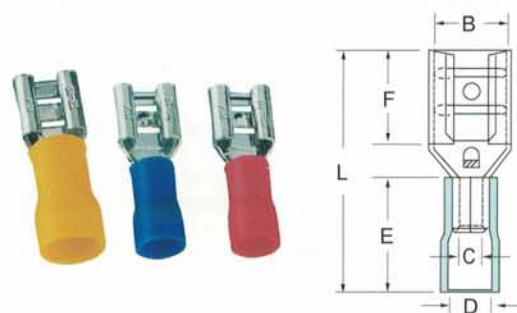

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	头部尺寸	尺寸 英寸 DIMENSION inch mm					
			B	F	L	E	D	T
22-16 A.W.G. 0.5-1.5 mm ²	FDD1-110(5)	.020×.110 (0.5×2.8)	.126 3.2	.256 6.5	.772 19.6	.433 11.0	.157 4.0	.012 0.3
	FDD1-110(8)	.032×.110 (0.8×2.8)	.126 3.2					
	FDD1-187(5)	.020×.187 (0.5×4.75)	.197 5.0	.252 6.4	.787 20.0			.016 0.4
	FDD1-187(8)	.032×.187 (0.8×4.75)	.197 5.0					
	FDD1-250	.032×.250 (0.8×6.35)	.260 6.6	.287 7.3	.846 21.5			.016 0.4
16-14 A.W.G. 1.5-2.5 mm ²	FDD2-110(5)	.020×.110 (0.5×2.8)	.126 3.2	.256 6.5	.772 19.6	.433 11.0	.177 4.5	.012 0.3
	FDD2-110(8)	.032×.110 (0.8×2.8)	.126 3.2					
	FDD2-187(5)	.020×.187 (0.5×4.75)	.197 5.0	.252 6.4	.787 20.0			.016 0.4
	FDD2-187(8)	.032×.187 (0.8×4.75)	.197 5.0					
	FDD2-250	.032×.250 (0.8×6.35)	.260 6.6	.287 7.3	.846 21.5			.016 0.4
12-10A.W.G. 4-6 mm ²	FDD5-250	.032×.250 (0.8×6.35)	.260 6.6	.287 7.3	.925 23.5	.512 13.0	.248 6.3	.016 0.4

快速接合连接器


QUICK SPLICE CONNECTORS

端子材料: PVC

端子材料: 黄铜

TERMINAL MATERIAL: PVC

TERMINAL MATERIAL: BRASS

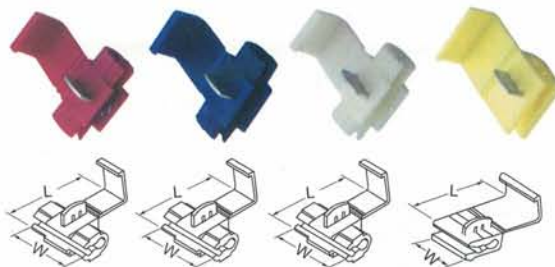

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	W 英寸 inch mm	L 英寸 inch mm	颜色 COLOR
22-18 A.W.G. 0.5-1.0 mm ²	878100	.787 20.0	1.063 27.0	红 RED
18-14 A.W.G. 0.75-2.5 mm ²	878101	.787 20.0	1.063 27.0	蓝 BLUE
18-14 A.W.G. 0.75-2.5 mm ²	878101	.787 20.0	1.063 27.0	白 WHITE
12-10 A.W.G. 4-6 mm ²	878201	.807 20.5	1.358 34.5	黄 YELLOW



全绝缘套端头 FULL PRE-INSULATION TERMINAL

绝缘材料: 绝缘 PVC

端子材料: 黄铜

绝缘颜色

22-16 A.W.G: 红色 16-14 A.W.G: 蓝色 12-10 A.W.G: 黄色

端子管标识符:

22-16 A.W.G: C=1.7mm 16-14 A.W.G: C=2.3mm 12-10 A.W.G: C=3.4mm


INSULATION MATERIAL: VINYL TERMINAL MATERIAL: BRASS

INSULATION COLOR:

22-16 A.W.G: RED 16-14 A.W.G: BLUE 12-10 A.W.G: YELLOW

TERMINAL BARREL I.D:

22-16 A.W.G: C=1.7mm 16-14 A.W.G: C=2.3mm 12-10 A.W.G: C=3.4mm

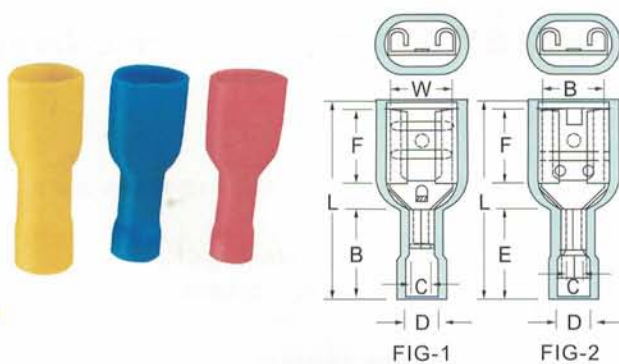

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	头部尺寸	尺寸 DIMENSION 英寸 inch mm						FIG
			B	F	L	E	D	T	
22-16 A.W.G. 0.5-1.5 mm ²	FDFD1-187(5)	.020×.187 (0.5×4.75)	.197 5.0	.252 6.4	.807 20.5	.413 10.5	.157 4.0	.016 0.4	1
	FDFD1-187(8)	.032×.187 (0.8×4.75)	.197 5.0						
	FDFD1-250	.032×.250 (0.8×6.35)	.260 6.6	.287 7.3	23		.154 3.9		2
16-14 A.W.G. 1.5-2.5 mm ²	FDFD2-187(5)	.020×.187 (0.5×4.75)	.197 5.0	.252 6.4	.796 20.2	.413 10.5	.185 4.7	.0016 0.4	1
	FDFD2-187(8)	.032×.187 (0.8×4.75)	.197 5.0						
	FDFD2-250	.032×.250 (0.8×6.35)	.260 6.6	.287 7.3	23				
12-10 A.W.G. 4-6 mm ²	FDFD5-250	.032×.250 (0.8×6.35)	.260 6.6	.287 7.3	.953 24.2	.492 12.5	.244 6.2	.016 0.4	1

子弹形母全绝缘端头 BULLET SHAPE FEMALE FULL INSULATION TERMINAL

绝缘材料: 绝缘 PVC 端子材料: 黄铜

绝缘颜色

22-16 A.W.G: 红色 16-14 A.W.G: 蓝色 12-10 A.W.G: 黄色

端子管标识符:

22-16 A.W.G: C=1.7mm 16-14 A.W.G: C=2.3mm 12-10 A.W.G: C=3.4mm


INSULATION MATERIAL: VINYL TERMINAL MATERIAL: BRASS

INSULATION COLOR:

22-16 A.W.G: RED 16-14 A.W.G: BLUE 12-10 A.W.G: YELLOW

TERMINAL BARREL I.D:

22-16 A.W.G: C=1.7mm 16-14 A.W.G: C=2.3mm 12-10 A.W.G: C=3.4mm

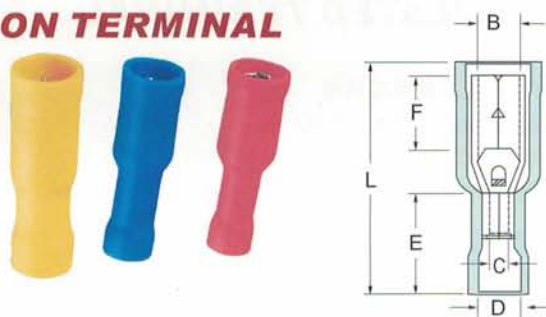

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	尺寸 DIMENSION 英寸 inch mm					
		B	F	L	E	D	T
22-16 A.W.G. 0.5-1.5 mm ²	FRD1-156	.153 3.9	.287 7.3	.917 23.3	.413 10.5	.150 3.8	.016 0.4
	FRD2-156	.153 3.9	.287 7.3	.925 23.5	.413 10.5	.185 4.7	.016 0.4
16-14 A.W.G. 1.5-2.5 mm ²	FRD2-195	.193 4.9	.276 7.0	.965 24.5			
12-10 A.W.G. 4-6 mm ²	FRD5-195	.193 4.9	.276 7.0	.988 25.1	.492 12.5	.244 6.2	.018 0.45



凤凰冷压端头

PHOENIX COLD PRESS TERMINAL

子弹形公预绝缘端头

BULLET SHAPE MALE PRE-INSULATION TERMINAL

绝缘材料: 绝缘 PVC

绝缘颜色

22-16 A.W.G:红色 16-14 A.W.G:蓝色 12-10 A.W.G:黄色

端子材料: 黄铜

22-16 A.W.G:C=1.7mm 16-14 A.W.G:C=2.3mm 12-10 A.W.G:C=3.4mm


INSULATION MATERIAL: VINYL TERMINAL MATERIAL: BRASS

INSULATION COLOR:

22-16 A.W.G: RED 16-14 A.W.G: BLUE 12-10 A.W.G: YELLOW

TERMINAL MATERIAL: COPPER

22-16 A.W.G:C=1.7mm 16-14 A.W.G:C=2.3mm 12-10 A.W.G:C=3.4mm

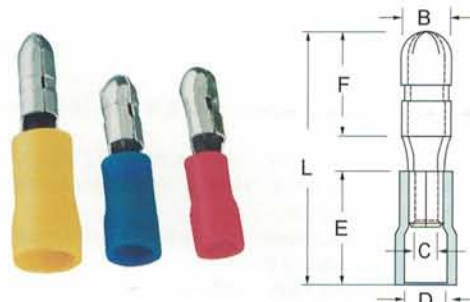

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM NO.	尺寸 DIMENSION 英寸 inch mm					
		B	F	L	E	D	T
22-16 A.W.G. 0.5-1.5 mm ²	MPD1-156	.157 4.0	.335 8.5	.886 22.0	.433 11.0	.157 4.0	.016 0.4
16-14 A.W.G. 1.5-2.5 mm ²	MPD2-156	.157 4.0	.335 8.5	.886 22.0	.433 11.0	.197 5.0	.016 0.4
	MPD2-195	.197 5.0	.335 8.5	.886 22.0			
12-10 A.W.G. 4-6 mm ²	MPD5-195	.197 5.0	.335 8.5	.925 23.5	.512 13.0	.256 6.5	.016 0.4

双线插入式管形预绝缘端头

DOUBLE WIRE INSERT TYPE RING PREFAB INSULATED TERIMINAL

端头材质: 镀锡紫铜管

绝缘套材质: 尼龙 PVC

CONNECTOR MATERIAL: COPPER TUBE


INSULATION MATERIAL: NYLON



电线范围 WIRE RANGE A.W.G mm ²	型号 ITEM NO	尺寸 DIMENSION						法国颜色 德国颜色 COLOR GERMANY COLOR FRANCE	使用压接工具型号 USING PRESSING AND CONNECTING TOOL TYPE
		F	L	W	B	D	C		
2×22A.W.G 2×0.5 mm ²	TE0508	8.0	14.5	5.0	6.5	1.8	1.5	□白色 ■橙色	
2×20A.W.G 2×0.75 mm ²	TE7508	8.0	14.5	5.5	6.7	2.1	1.8	■蓝色 □白色	
	TE7510	10.0	16.7						
2×18A.W.G 2×1.0 mm ²	TE1008	8.0	15.1	5.5	7.1	2.3	2.0	■红色 ■黄色	
	TE1010	10.0	17.1						
2×16A.W.G 2×1.5 mm ²	TE1508	8.0	15.5	6.4	7.2	2.6	2.3	■黑色 ■红色	
	TE1512	12.0	19.5						
2×14A.W.G 2×2.5 mm ²	TE2510	10.0	18.5	8.0	8.5	3.3	2.9	■灰色 ■蓝色	
	TE2513	13.0	21.5						
2×12A.W.G 2×4 mm ²	TE4012	12.0	23.1 10.0	8.8	11.1	4.2	3.8	■橙色 ■灰色	
2×10A.W.G 2×6 mm ²	TE6014	14.0	26.1	9.5	12.0	5.3	4.9	■绿色 ■黑色	
2×8A.W.G 2×10 mm ²	TE10-14	14.0	26.6	12.6	12.0	6.9	6.5	■棕色 □乳白色	
2×6A.W.G 2×16 mm ²	TE16-14	14.0	31.3	19.0	17.3	8.7	8.3	□乳白色 ■绿色	



管形裸端頭 PIPE BARE TERMINAL



端子材料：鍍銀紫銅管

TERMINAL MATERIAL : BRAZEN PLATING TIN

电线范围 WIRE RANGE A.W.G mm ²	型号 ITEMNO	尺寸 DIMENSION				使用压接工具型号 USING PRESSING AND CONNECTING TOOL TYPE
		L	D	C	W	
		mm	mm	mm	mm	
26 A.W.G. 0.2 mm ²	GT0206	6.0	1.1	0.8	1.5	
	GT0207	7.0				
	GT0208	8.0				
24 A.W.G. 0.3 mm ²	GT0306	6.0	1.1	0.8	1.5	
	GT0308	8.0				
22 A.W.G. 0.5 mm ²	GT0505	5.0	1.4	1.1	1.7	FXT2000L 使用0.5钳口
	GT0506	6.0				
	GT0508	8.0				
	GT0510	10.0				
	GT0512	12.0				
20 A.W.G. 0.75 mm ²	GT7506	6.0	1.6	1.3	1.9	FXT2000L 使用0.75钳口
	GT7508	8.0				
	GT7510	10.0				
	GT7512	12.0				
	GT7515	15.0				
	GT7520	20.0				
18 A.W.G. 1.0 mm ²	GT1006	6.0	1.8	1.5	2.2	FXT2000L 使用1.0钳口
	GT1008	8.0				
	GT1010	10.0				
	GT1012	12.0				
	GT1015	15.0				
	GT1018	18.0				
	GT1020	20.0				
16 A.W.G. 1.5 mm ²	GT1507	7.0	2.0	1.7	2.5	FXT2000L 使用1.5钳口
	GT1508	8.0				
	GT1510	10.0				
	GT1512	12.0				
	GT1515	15.0				
	GT1518	18.0				
	GT1520	20.0				
14 A.W.G. 2.5 mm ²	GT2506	6.0	2.5	2.2	3.3	FXT2000L 使用2.5钳口
	GT2507	7.0				
	GT2508	8.0				
	GT2510	10.0				
	GT2512	12.0				
	GT2515	15.0				
	GT2518	18.0				
	GT2520	20.0				
	GT2525	25.0				
12 A.W.G. 4 mm ²	GT4009	9.0	3.4	3.0	3.9	FXT2000L 使用4.0钳口
	GT4010	10.0				
	GT4012	12.0				
	GT4015	15.0				




鳳凰冷壓端頭

PHOENIX COLD PRESS TERMINAL

管形裸端頭

PIPE BARE TERMINAL




端子材料：鍍銀紫銅管

TERMINAL MATERIAL : BRAZEN PLATING TIN

电线范围 WIRE RANGE A.W.G mm ²	型号 ITEMNO	尺寸 DIMENSION				使用压接工具型号 USING PRESSING AND CONNECTING TOOL TYPE
		L	D	C	W	
		mm	mm	mm	mm	
12 A.W.G. 4 mm ²	GT4018	18.0	3.4	3.0	3.9	FXT2000M 使用4.0钳口
	GT4020	20.0				
10 A.W.G. 6 mm ²	GT6006	6.0	4.0	3.6	4.7	FXT2000M 使用6.0钳口
	GT6010	10.0				
	GT6012	12.0				
	GT6015	15.0				
	GT6018	18.0				
	GT6020	20.0				
8 A.W.G. 10 mm ² S	GT10-12	12.0	4.9	4.3	5.5	FXT2000M 使用10钳口
	GT10-15	15.0				
	GT10-18	18.0				
8 A.W.G. 10 mm ²	GT10-12	12.0	5.6	5.2	6.2	FXT2000M 使用10钳口
	GT10-15	15.0				
	GT10-16	16.0				
	GT10-18	18.0				
	GT10-20	20.0				
	GT10-25	25.0				
6 A.W.G. 16 mm ²	GT16-12	12.0	6.4	6.0	7.4	FXT2000M 使用16钳口
	GT16-15	15.0				
	GT16-16	16.0				
	GT16-18	18.0				
	GT16-20	20.0				
	GT16-22	22.0				
	GT16-25	25.0				
	GT16-30	30.0				
4 A.W.G. 25 mm ²	GT16-32	32.0	7.8	7.4	9.1	FXT2000N 使用25钳口
	GT25-12	12.0				
	GT25-15	15.0				
	GT25-16	16.0				
	GT25-18	18.0				
	GT25-20	20.0				
	GT25-22	22.0				
	GT25-25	25.0				
2 A.W.G. 35 mm ²	GT25-30	30.0	8.7	8.3	10.2	FXT2000N 使用35钳口
	GT25-32	32.0				
	GT35-12	12.0				
	GT35-15	15.0				
	GT35-16	16.0				
	GT35-18	18.0				
	GT35-20	20.0				
	GT35-25	25.0				
1/0 A.W.G. 50 mm ²	GT35-30	30.0	11.0	10.4	12.7	FXT2000P 使用50钳口
	GT35-32	32.0				
	GT50-15	15.0				
	GT50-18	18.0				
	GT50-22	22.0				
	GT50-25	25.0				
	GT50-30	30.0				
	GT50-32	32.0				

管形裸端头 PIPE BARE TERMINAL


端子材料：镀银紫铜管
TERMINAL MATERIAL: BRAZEN PLATING TIN



电线范围 WIRE RANGE A.W.G mm ²	型号 ITEMNO	尺寸 DIMENSION				使用压接工具型号 USING PRESSING AND CONNECTING TOOL TYPE
		L	D	C	W	
		mm	mm	mm	mm	
2/0 A.W.G. 70 mm ²	GT70-15	15.0	12.5	11.9	15.8	FXT2000L 使用50钳口 USING 50 FOR FXT2000L
	GT70-22	22.0				
	GT70-25	25.0				
	GT70-30	30.0				
3/ A.W.G. 95 mm ²	GT95-25	25.0	15.6	14.8	17.3	
	GT95-30	30.0				
	GT95-32	32.0				
	GT95-34	34.0				
4/0 A.W.G. 120 mm ²	GT120-30	30.0	17.7	16.7	20.2	
	GT120-32	32.0				
	GT120-34	34.0				
	GT120-38	38.0				
	GT120-40	40.0				
150/300A.W.G. 150 mm ²	GT150-32	32.0	20.6	19.6	23.0	
	GT150-34	34.0				
	GT150-38	38.0				
	GT150-40	40.0				
150/300A.W.G. 185 mm ²	GT185-32	32.0	21.4	20.2	23.9	
	GT185-40	40.0				

管形预绝缘端头 PIPE BARE TERMINAL

端头材质：镀锡紫铜管
绝缘套材质：尼龙 PVC
CONNECTOR MATERIAL: COPPER TUBE
INSULATION MATERIAL: NYLON



电线范围 WIRE RANGE A.W.G mm ²	型号 ITEMNO	尺寸 DIMENSION					法国颜色 德国颜色 COLOR GERMANY COLOR FRANCE	使用压接工具型号 USING PRESSING AND CONNECTING TOOL TYPE
		F	L	W	D	C		
24A.W.G. 0.3 mm ²	E0306	6.0	10.5	2.5	1.1	0.8	□青绿色	
	E0308	8.0	12.5					
22A.W.G. 0.5 mm ²	E0505	5.0	11.0	2.6	1.3	1.0	□白色 ■橙色	使用0.5钳口 USING 0.5 FOR
	E0506	6.0	12.0					
	E0508	8.0	14.0					
	E0510	10.0	16.0					
	E0512	12.0	18.0					
20A.W.G. 0.75 mm ²	E7506	6.0	12.3	2.8	1.6	1.3	■蓝色 □白色	使用0.75钳口 USING 0.75 FOR
	E7508	8.0	14.3					
	E7510	10.0	16.3					
	E7512	12.0	18.3					
	E7518	18.0	24.3					
18A.W.G. 1.0 mm ²	E1006	6.0	12.3	3.0	1.8	1.5	■红色 ■黄色	使用1.0钳口 USING 1.0 FOR
	E1008	8.0	14.3					
	E1010	10.0	16.3					
	E1012	12.0	18.3					
	E1018	18.0	24.3					



管形预绝缘端头 PIPE BARE TERMINAL

端头材质：镀锡紫铜管

绝缘套材质：尼龙 PVC

CONNECTOR MATERIAL: COPPER TUBE

INSULATION MATERIAL: NYLON




电线范围 WIRE RANGE A.W.G mm ²	型号 ITEMNO	尺寸 DIMENSION					法国颜色 德国颜色 COLOR GERMANY COLOR FRANCE	使用压接工具型号 USING PRESSING AND CONNECTING TOOL TYPE
		F	L	W	D	C		
16A.W.G. 1.5 mm ²	E1508	8.0	14.3	3.5	2.1	1.8	<div>■ 黑色</div> <div>■ 红色</div>	使用1.5钳口 USING 1.5 FOR
	E1510	10.0	16.3					
	E1512	12.0	18.3	3.5				
	E1515	15.0	21.3					
	E1518	18.0	24.3					
14A.W.G. 2.5 mm ²	E2508	8.0	15.4	4.0	2.6	2.3	<div>■ 灰色</div> <div>■ 蓝色</div>	使用2.5钳口 USING 2.5 FOR
	E2510	10.0	17.4					
	E2512	12.0	19.4					
	E2518	18.0	25.4					
	E2525	25.0	32.4					
12A.W.G. 4.0 mm ²	E4009	9.0	16.4	4.5	3.2	2.8	<div>■ 橙色</div> <div>■ 灰色</div>	使用4.0钳口 USING 4.0 FOR
	E4010	10.0	17.4					
	E4012	12.0	19.4					
	E4018	18.0	25.4					
10A.W.G. 6.0 mm ²	E6012	12.0	20.5	6.0	3.9	3.5	<div>■ 绿色</div> <div>■ 黑色</div>	使用6.0钳口 USING 6.0 FOR
	E6018	18.0	26.5					
8A.W.G. 10 mm ²	E10-12	12.0	21.5	7.5	4.9	4.5	<div>■ 棕色</div> <div>□ 乳白色</div>	使用10钳口 USING 10 FOR
	E10-18	18.0	27.5					
6A.W.G. 16 mm ²	E16-12	12.0	22.0	8.7	6.2	5.8	<div>□ 乳白色</div> <div>■ 绿色</div>	使用16钳口 USING 16 FOR
	E16-18	18.0	28.0					
4A.W.G. 25 mm ²	E25-12	12.0	25.0	11.0	7.9	7.5	<div>■ 黑色</div> <div>■ 棕色</div>	使用25钳口 USING 25 FOR
	E25-15	15.0	28.0					
	E25-16	16.0	29.0					
	E25-18	18.0	31.0					
	E25-22	22.0	35.0					
2A.W.G. 35 mm ²	E35-16	16.0	30.0	12.5	8.7	8.3	<div>■ 红色</div> <div>□ 米色</div>	使用35钳口 USING 35 FOR
	E35-18	18.0	32.0					
	E35-22	22.0	36.0					
	E35-25	25.0	39.0					
1/0A.W.G. 50 mm ²	E50-12	12.0	28.0	15.0	10.9	10.3	<div>■ 蓝色</div> <div>■ 绿色</div>	使用50钳口 USING 50 FOR
	E50-20	20.0	36.0					
	E50-25	25.0	41.0					
2/0A.W.G. 70 mm ²	E70-20	20.0	37.0	16.0	14.3	13.5	<div>■ 黄色</div>	
	E70-25	25.0	42.0					
	E70-27	27.0	44.0					
3/0A.W.G. 95 mm ²	E95-25	25.0	44.0	18.5	15.3	14.5	<div>■ 红色</div>	
4/0A.W.G. 120 mm ²	E120-27	27.0	47.6	20.3	17.5	16.5	<div>■ 蓝色</div>	
	E120-32	32.0	52.6					
250/300A.W.G. 150 mm ²	E150-25	25.0	50.6	23.4	20.6	19.6	<div>■ 黄色</div>	
	E150-27	27.0	52.6					
	E150-32	32.0	57.6					



非绝缘对接&并接连接器

Non-Insulated Butt & Paralle Connectors

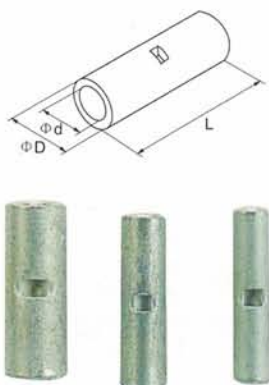


材料：无缝管

MATERIAL: SEAMLESS TUBE

项 目 ITEM N.O.	适用线材 AWG#(mm ²) Applicable Wire AWG#(mm ²)	L	d	ΦD
BNT1	22-16 (0.25-1.65)	15.0	1.7	3.3
BNT2	16-14 (1.04-2.63)	15.0	2.4	4.0
BNT5	12-10 (2.63-6.64)	15.0	3.6	5.5
BNT8	8mm	21.0	4.6	7.0
BNT14	14mm	26.0	5.9	8.9
BNT22	22mm	29.0	7.8	11.3
BNT38	38mm	32.0	9.5	13.0

乙烯基&尼龙-绝缘对接连接器

Vinyl & Nylon-Insulated Butt Connectors

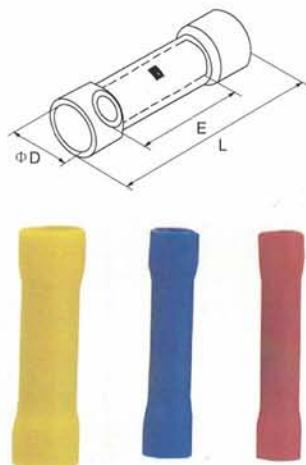


材料：无缝管 (PVC)

MATERIAL: SEAMLESS TUBE (PVC)

项 目 ITEM N.O.	适用线材 AWG#(mm ²) Applicable Wire AWG#(mm ²)	E	L	ΦD
BV1	22-16 (0.25-1.65)	15.0	25.0	3.9
BV2	16-14 (1.04-2.63)	15.0	25.0	4.3
BV5	12-10 (2.63-6.64)	15.0	26.0	6.6
BV8	8mm	21.5	36.0	8.1

乙烯基-绝缘并接连接器

Vinyl-Insulated Paralle Connectors

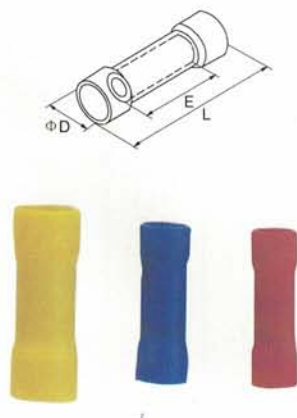

材料：无缝管 (PVC)

MATERIAL: SEAMLESS TUBE (PVC)


项 目 ITEM N.O.	适用线材 AWG#(mm ²) Applicable Wire AWG#(mm ²)	E	L	ΦD
PVT1	22-16 (0.25-1.65)	8.0	16	4.3
PVT2	16-14 (1.04-2.63)	8.0	16	5.0
PVT5	12-10 (2.63-6.64)	8.5	20	6.7



圆形裸端头 ROUND SHAPE NAKED TERMINAL

端子材料：紫铜

TERMINAL MATERIAL: COPPER

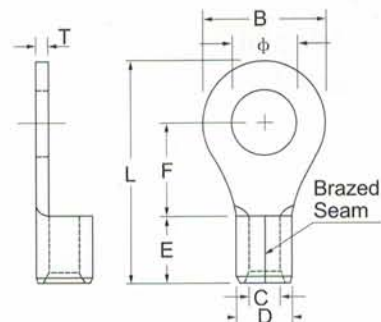

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						英寸 inch mm	
	焊 缝 WELDING SEAM	φ		B	F	L	E	D	C	T	
22-16 A.W.G. 0.5-1.5 mm ²	RNB1-3.2	#4	.126 3.2	.216	.197	.492	.189 4.8	.134 3.4	.067 1.7	.030 0.75	
	RNBS1-3.7	#6	.146 3.7	5.5	5.0	12.5					
	RNBM1-3.7	#6	.146 3.7	.260 6.6	.248 6.3	.567 14.4					
	RNBL1-3.7	#6	.146 3.7	.315 8.0	.276 7.0	.622 15.8					
	RNBS1-4	#8	.169 4.3	.260 6.6	.248 6.3	.567 14.4					
	RNBL1-4	#8	.169 4.3	.315	.276	.622					
	RNB1-5	#10	.209 5.3	8.0	7.0	15.8					
	RNBL1-5	#10	.209 5.3	.457 11.6	.433 11.0	.858 21.8					
	RNB1-6	1/4	.252 6.4								
	RNB1-8	5/16	.331 8.4								
	RNB1-10	3/8	.413 10.5	.535 13.6	.547 13.9	1.004 25.5					
	RNB1-12	1/2	.512 13.0	.756 19.2	.630 16.0	1.197 30.4					
	RNB1-14	9/16	.591 15.0	1.063 27.0	.827 21.0	1.547 39.3					.031 0.8
	RNB1-16	5/8	.669 17.0								
	RNB1-20	3/4	.827 21.0								
16-14 A.W.G. 1.5-2.5 mm ²	RNB2-3.2	#4	.126 3.2	.260 6.6	.189	.504	.189 4.8	.161 4.1	.091 2.3	.031 0.8	
	RNBS2-3.7	#6	.146 3.7		4.8	12.8					
	RNBM2-3.7	#6	.146 3.7		.248 6.3	.567 14.4					
	RNBL2-3.7	#6	.146 3.7		.335 8.5	.307 7.8					.661 16.8
	RNBS2-4	#8	.169 4.3		.260 6.6	.248 6.3					.567 14.4
16-14 A.W.G. 1.5-2.5 mm ²	RNBL-2-4	#8	.169 4.3	.335	.307	.661 16.8	.189 4.8	.161 4.1	.091 2.3	.031 0.8	
	RNBS2-5	#10	.209 5.3	8.5	7.8						
	RNBL2-5	#10	.209 5.3	.374 9.5	.287 7.3						
	RNB2-6	1/4	.252 6.4	.472 12.0	.433 11.0	.858 21.8					
	RNB2-8	5/16	.331 8.4	.472 12.0	.433 11.0	.858 21.8					
	RNB2-10	3/8	.413 10.5	.535 13.6	.547 13.9	1.004 25.5					
	RNB2-12	1/2	.512 13.0	.756 19.2	.630 16.0	1.197 30.4					
	RNB2-14	9/16	.591 15.0	1.063 27.0	.827 21.0	1.547 39.3					
	RNB2-16	5/8	.669 17.0								
	RNB2-20	3/4	.827 21.0								




圆形裸端头

ROUND SHAPE NAKED TERMINAL

端子材料：紫铜

TERMINAL MATERIAL: COPPER

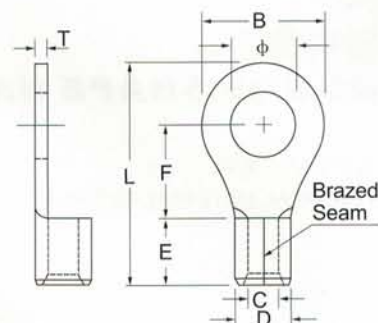


线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM.NO.	饰钮尺寸 STUD SIZE		尺寸 英寸 DIMENSION inch mm						
	焊 缝 WELDING SEAM	Φ		B	F	L	E	D	C	T
14-12 A.W.G. 2.5-4 mm ²	RNB3-4	#8	.169 4.3	.315 8.0	.303 7.7	.709 18.0	.236 6.0	.201 5.1	.114 2.9	.039 1.0
	RNBS3-5	#10	.209 5.3							
	RNBL3-5	#10	.209 5.3	.472 12.0	.370 9.4	.843 21.4				
	RNB3-6	1/4	.252 6.4							
12-10 A.W.G. 4-6 mm ²	RNB5-3.7	#6	.146 3.7	.283 7.2	.240 6.1	.618 15.7	.236 6.0	.220 5.6	.134 3.4	.039 1.0
	RNBS5-4	#8	.169 4.3							
	RNBL5-4	#8	.169 4.3	.374 9.5	.358 9.1	.772 19.6				
	RNB5-5	#10	.209 5.3							
	RNB5-6	1/4	.252 6.4	.472 12.0	.413 10.5	.886 22.5				
	RNBM5-6	1/4	.252 6.4							
	RNB5-8	5/16	.331 8.4	.591 15.0	.531 13.5	1.063 27.0				
	RNB5-10	3/8	.413 10.5							
12-10 A.W.G. 4-6mm ²	RNB5-12	1/2	.512 13.0	.756 19.2	.630 16.0	1.244 31.6	.236 6.0	.220 5.6	.134 3.4	.039 1.0
	RNB5-14	9/16	.591 15.0							
	RNB5-16	5/8	.669 17.0	1.260 32.0	.992 25.2	1.858 47.2				
	RNB5-20	3/4	.827 21.0							
8 A.W.G. 8 mm ²	RNB8-3.7	#6	.146 3.7	.315 8.0	.366 9.3	.846 21.5	.337 8.5	.283 7.2	.177 4.5	.047 1.2
	RNBS8-4	#8	.169 4.3							
	RNBL8-4	#8	.169 4.3	.472 12.0	.366 9.3	.937 23.8				
	RNBS8-5	#10	.209 5.3							
	RNBM8-5	#10	.209 5.3	.472 12.0	.366 9.3	.937 23.8				
	RNBL8-5	#10	.209 5.3							
	RNBS8-6	1/4	.252 6.4	.472 12.0	.366 9.3	.937 23.8				
	RNBL8-6	1/4	.252 6.4							
	RNB8-8	5/16	.331 8.4	.591 15.0	.543 13.8	1.161 29.8				
	RNB8-10	3/8	.413 10.5							
	RNB8-12	1/2	.512 13.0	.787 20.0	.591 15.0	1.319 33.5				



圆形裸端头 ROUND SHAPE NAKED TERMINAL

端子材料：紫铜

TERMINAL MATERIAL: COPPER

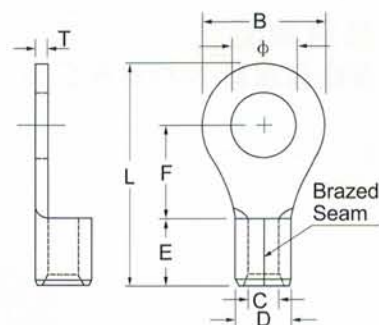


线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 英寸 DIMENSION inch mm						
	焊 缝 WELDING SEAM	Φ		B	F	L	E	D	C	T
6 A.W.G. 14 mm ²	RNB14-4	#8	.169 4.3	.472 12.0	.524 13.3	1.173 29.8	.413 10.5	.354 9.0	.222 5.65	.059 1.5
	RNB14-5	#10	.209 5.3							
	RNBS14-6	1/4	.252 6.4							
	RNBL14-6	1/4	.252 6.4	.630 16.0	.559 14.2	1.280 32.5				
	RNB14-8	5/16	.331 8.4							
	RNB14-10	3/8	.413 10.5							
6 A.W.G. 14mm ²	RNB14-11	7/16	.453 11.5	.866 22.0	.780 19.8	1.614 41.0	.413 10.5	.354 9.0	.222 5.65	.059 1.5
RNB14-12	1/2	.512 13.0								
4A.W.G. 22mm ²	RNB22-4	#8	.169 4.3	.866 22.2	.594 15.1	1.307 33.2	.472 12.0	.453 11.5	.303 7.7	.067 1.8
	RNBS22-5	#10	.209 5.3							
	RNBL22-5	#10	.209 5.3							
	RNBS22-6	1/4	.252 6.4	.866 22.2	.594 15.1	1.299 33.0				
	RNBL22-6	1/4	.252 6.4							
	RNB22-8	5/16	.331 8.4							
	RNB22-10	3/8	.413 10.5							
	RNB22-11	7/16	.453 11.5	.866 22.0	.776 19.7	1.661 42.5				
	RNB22-12	1/2	.512 13.0							
2A.W.G. 38 mm ²	RNB38-5	#10	.209 5.3	.602 15.3	.685 17.4	1.535 39.0	.551 14.0	.524 13.3	.370 9.4	.071 1.8
	RNBS38-6	1/4	.252 6.4							
	RNBL38-6	1/4	.252 6.4							
	RNBS38-8	5/16	.331 8.4	.866 22.0	.697 17.7	1.681 42.7				
	RNBL38-8	5/16	.331 8.4							
	RNBS38-10	3/8	.413 10.5							
	RNBL38-10	3/8	.413 10.5							
	RNB38-11	7/16	.453 11.5	.866 22.0	.697 17.7	1.681 42.7				
	RNB38-12	1/2	.512 13.0							



圆形裸端头 ROUND SHAPE NAKED TERMINAL

端子材料：紫铜

TERMINAL MATERIAL: COPPER

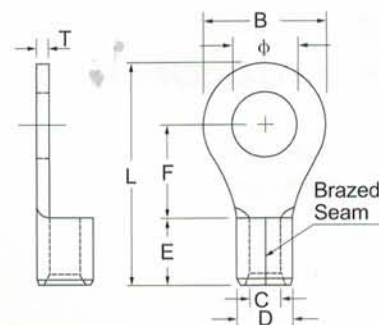


线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						英寸 inch mm
	焊 缝 WELDING SEAM	φ		B	F	L	E	D	C	T
1/0 A.W.G. 60 mm ²	RNB60-6	1/4	.252 6.4	.866 22.0	.815 20.7	1.957 49.7	.709 18.0	.606 15.4	.449 11.4	.071 1.8
	RNB60-8	5/16	.331 8.4							
	RNB60-10	3/8	.413 10.5							
	RNB60-11	7/16	.453 11.5							
	RNB60-12	1/2	.512 13.0							
	RNB60-13	9/16	.551 14.0	1.260 32.0	.925 23.5	2.264 57.5				
	RNB60-14	9/16	.591 15.0							
	RNB60-16	5/8	.669 17.0							
	RNB60-18	11/16	.748 19.0							
	RNB60-20	3/4	.827 21.0							
	RNB60-22	7/8	.906 23.0							
2/0 A.W.G. 70mm ²	RNB70-6	1/4	.252 6.4	.945 24.0	.787 20.0	1.969 50.0	.709 18.0	.689 17.5	.524 13.3	.079 2.2
	RNB70-8	5/16	.331 8.4							
	RNB70-10	3/8	.413 10.5							
	RNB70-11	7/16	.453 11.5							
	RNB70-12	1/2	.512 13.0							
	RNB70-13	9/16	.551 14.0	1.260 32.0	1.024 26.0	2.402 61.0				
	RNB70-14	9/16	.591 15.0							
	RNB70-16	5/8	.669 17.0							
	RNB70-18	11/16	.748 19.0							
	RNB70-20	3/4	.827 21.0							
	RNB70-22	7/8	.906 23.0							



圆形裸端头 ROUND SHAPE NAKED TERMINAL

端子材料：紫铜

TERMINAL MATERIAL: COPPER

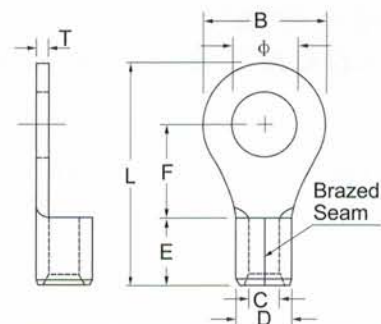


线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						英寸 inch mm
	焊 缝 WELDING SEAM	Φ		B	F	L	E	D	C	T
3/0 A.W.G. 80 mm ²	RNB80-6	1/4	.252 6.4	1.063 27.0	.815 20.7	2.134 54.2	.787 20.0	.768 19.5	.571 14.5	.091 2.2
	RNB80-8	5/16	.331 8.4							
	RNB80-10	3/8	.413 10.5							
	RNB80-11	7/16	.453 11.5							
	RNB80-12	1/2	.512 13.0							
	RNB80-13	9/16	.551 14.0	1.260 32.0	1.260 32.0	2.677 68.0				
	RNB80-14	9/16	.591 15.0							
	RNB80-16	5/8	.669 17.0							
	RNB80-18	11/16	.748 19.0							
	RNB80-20	3/4	.827 21.0							
	RNB80-22	7/8	.906 23.0							
4/0 A.W.G. 100mm ²	RNB100-6	1/4	.252 6.4	1.122 28.5	.801 20.4	2.189 55.6	.827 21.0	.870 22.1	.646 16.4	.106 2.6
	RNB100-8	5/16	.331 8.4							
	RNB100-10	3/8	.413 10.5							
	RNB100-11	7/16	.453 11.5							
	RNB100-12	1/2	.512 13.0							
	RNB100-14	9/16	.591 15.0	1.260 32.0	1.260 32.0	2.717 69.0				
	RNB100-16	5/8	.669 17.0							
	RNB100-18	11/16	.748 19.0							
	RNB100-20	3/4	.827 21.0							
	RNB100-22	7/8	.906 23.0							



圓形裸端頭 ROUND SHAPE NAKED TERMINAL

端子材料：紫銅


TERMINAL MATERIAL: COPPER

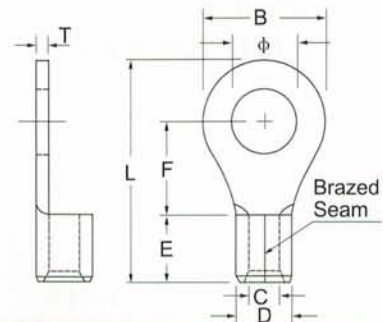

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						英寸 inch mm
	焊 缝 WELDING SEAM	φ		B	F	L	E	D	C	T
250/300 MCM A.W.G. 150 mm ²	RNB150-8	5/16	.331 8.4	1.417 36.0	.906 23.0	2.599 66.0	1.063 27.0	1.047 26.6	.768 19.5	.126 3.2
	RNB150-10	3/8	.413 10.5							
	RNB150-11	7/16	.453 11.5							
	RNB150-12	1/2	.512 13.0							
	RNB150-14	9/16	.591 15.0							
	RNB150-16	5/8	.669 17.0	1.417 36.0	1.417 36.0	6.189 81.0	1.063 27.0	1.047 26.6	.768 19.5	.126 3.2
	RNB150-18	11/16	.748 19.0							
	RNB150-20	3/4	.827 21.0							
	RNB150-22	7/8	.906 23.0							
	RNB150-24	15/16	.984 25.0							
RNB150-27	1	1.102 28.0								
300/350 MCM A.W.G. 180mm ²	RNB180-8	5/16	.331 8.4	1.516 38.5	.965 24.5	2.717 69.0	1.122 28.5	1.126 28.6	.827 21.0	.138 3.6
	RNB180-10	3/8	.413 10.5							
	RNB180-11	7/16	.453 11.5							
	RNB180-12	1/2	.512 13.0							
	RNB180-14	9/16	.591 15.0							
	RNB180-16	5/8	.669 17.0	1.516 38.5	1.535 39.0	3.409 86.6	1.122 28.5	1.126 28.6	.827 21.0	.138 3.6
	RNB180-18	11/16	.748 19.0							
	RNB180-20	3/4	.827 21.0							
	RNB180-22	7/8	.906 23.0							
	RNB180-24	15/16	.984 25.0							
	RNB180-27	1	1.102 28.0							



圆形裸端头 ROUND SHAPE NAKED TERMINAL

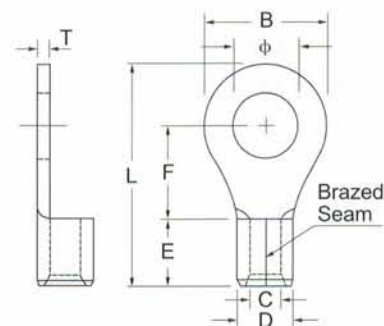

端子材料：紫铜

TERMINAL MATERIAL: COPPER


线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						英寸 inch mm
	焊 缝 WELDING SEAM	Φ		B	F	L	E	D	C	T
400/500 MCM A.W.G. 200 mm ²	RNB200-8	5/16	.331 8.4	1.732 44.0	.965 24.5	2.835 72.0	1.240 31.5	1.283 32.6	.945 24.0	.157 4.0
	RNB200-10	3/8	.413 10.5							
	RNB200-11	7/16	.453 11.5							
	RNB200-12	1/2	.512 13.0							
	RNB200-14	9/16	.591 15.0							
	RNB200-16	5/8	.669 17.0							
	RNB200-18	11/16	.748 19.0	1.732 44.0	1.476 37.5	3.583 91.0	1.398 35.5	1.480 37.6	1.102 28.0	.169 4.2
	RNB200-20	3/4	.827 21.0							
	RNB200-22	7/8	.906 23.0							
	RNB200-24	15/16	.984 25.0							
	RNB200-27	1	1.102 28.0							
500/600 MCM A.W.G. 325mm ²	RNB325-8	5/16	.331 8.4	1.988 50.5	1.319 33.5	3.465 88.0	1.398 35.5	1.480 37.6	1.102 28.0	.169 4.2
	RNB325-10	3/8	.413 10.5							
	RNB325-11	7/16	.453 11.5							
	RNB325-12	1/2	.512 13.0							
	RNB325-14	9/16	.591 15.0							
	RNB325-16	5/8	.669 17.0							
	RNB325-18	11/16	.748 19.0	1.988 50.5	1.772 45.0	4.161 105.7	1.398 35.5	1.480 37.6	1.102 28.0	.169 4.2
	RNB325-20	3/4	.827 21.0							
	RNB325-22	7/8	.906 23.0							
	RNB325-24	15/16	.984 25.0							
	RNB325-27	1	1.102 28.0							



叉形裸端頭 FORK SHAPE NAKED TERMINAL

端子材料：紫銅

TERMINAL MATERIAL: COPPER

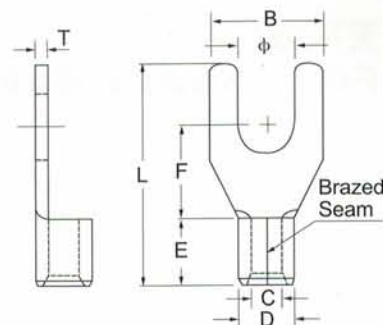


线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM.NO.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						英寸 inch mm		
	焊 缝 WELDING SEAM	Φ		B	F	L	E	D	C	T		
22-16 A.W.G. 0.5-1.5 mm ²	SNB1-3.2	#4	.126 3.2	.323 5.7	.256 6.5	.630 16.0	.189 4.8	.134 3.4	.067 1.7	.030 0.75		
	SNBS1-3.7	#6	.146 3.7									
	SNBL1-3.7	#6	.146 3.7									
	SNBLL1-3.7	#6	.146 3.7									
	SNBS1-4	#8	.169 4.3	.252 6.4								
	SNBM1-4	#8	.169 4.3	.283 7.2	.256 6.5	.630 16.0						
	SNBL1-4	#8	.169 4.3	.319 8.1								
	SNBS1-5	#10	.209 5.3									
	SNBL1-5	#10	.209 5.3								.374 9.5	.256 6.5
	SNBS1-6	1/4	.252 6.4									
SNBL1-6	1/4	.252 6.4	.472 12.0	.433 11.0	.866 22.0							
16-14 A.W.G. 1.5-2.5 mm ²	SNB2-3.2	#4	.126 3.2	.224 5.7	.256 6.5	.630 16.0	.189 4.8	.161 4.1	.091 2.3	.031 0.8		
	SNBS2-3.7	#6	.146 3.7									
	SNBL2-3.7	#6	.146 3.7									
	SNBLL2-3.7	#6	.146 3.7									
	SNBS2-4	#8	.169 4.3	.252 6.4							.256 6.5	.630 16.0
	SNBM2-4	#8	.169 4.3	.283 7.2								
	SNBL2-4	#8	.169 4.3	.319 8.1								
	SNBS2-5	#10	.209 5.3									
	SNBL2-5	#10	.209 5.3		.366 9.3							
	SNBS2-6	1/4	.252 6.4									
	SNBL2-6	1/4	.252 6.4	.472 12.0	.433 11.0	.866 22.0						



叉形裸端头

FORK SHAPE NAKED TERMINAL

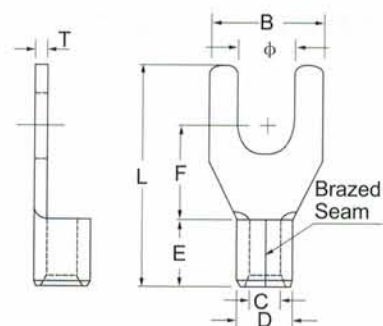

端子材料：紫铜

TERMINAL MATERIAL: COPPER


线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM.NO.	饰钮尺寸 STUD SIZE		尺寸 DIMENSION						英寸 inch mm
	焊 缝 WELDING SEAM	Φ		B	L	E	D	C	T	
14-12 A.W.G. 2.5-4 mm ²	SNB3-3.7	#6	.146 3.7	.315 8.0	.720 18.3	.236 6.0	.199 5.0	.188 3.0	.039 1.0	
	SNB3-4	#8	.169 4.3							
	SNB3-5	#10	.209 5.3							
	SNB3-6	1/4	.252 6.4							.472 12.0
12-10 A.W.G. 4-6mm ²	SNBS5-3.7	#6	.146 3.7	.283 7.2	.685 17.4	.236 6.0	.220 5.6	.134 3.4	.039 1.0	
	SNB5-3.7	#6	.146 3.7	.327 8.3	.728 18.5					
	SNBSS5-4	#8	.169 4.3	.283 7.2	.685 17.4					
	SNBS5-4	#8	.169 4.3	.327 8.3	.728 18.5					
	SNBL5-4	#8	.169 4.3	.354 9.0						
	SNB5-5	#10	.209 5.3							
	SNBS5-6	1/4	.252 6.4							
	SNBL5-6	1/4	.252 6.4	.472 12.0						.965 24.5
	SNB5-8	5/16	.331 8.4	.551 14.0	.925 23.5					
8 A.W.G. 8 mm ²	SNB8-5	#10	.209 5.3	.413 10.5	.819 20.8	.335 8.5	.283 7.2	.177 4.5	.047 1.2	
	SNB8-6	1/4	.252 6.4	.425 10.8	.886 22.5					
	SNB8-8	5/16	8.5	14	28.5					
6 A.W.G. 14 mm ²	SNB14-6	1/4	.252 6.5	.472 12.0	1.004 29.0	.413 10.5	.354 9.0	.222 5.65	.059 1.5	
	SNB14-8	5/16	.331 8.5	.630 16.0	1.122 32.5					



片形裸端头 PLATE SHAPE NAKED TERMINAL

端子材料：紫铜

TERMINAL MATERIAL: COPPER

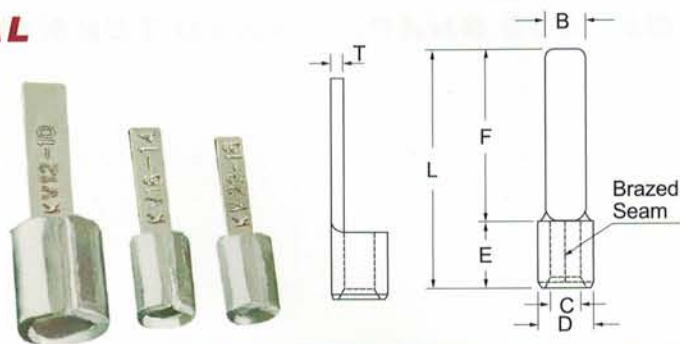


线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM N.O.	尺寸 DIMENSION							英寸 inch mm
	焊 缝 WELDING SEAM	B	F	L	E	D	C	T	
26-22 A.W.G. 0.2-0.5 mm ²	DBN0.5-8	.059 1.5	.315 8.0	.472 12.0	.157 4.0	.087 2.2	.039 1.0	.020 0.5	
22-16 A.W.G. 0.5-1.5 mm ²	DBN1-10	.091 2.3	.394 10.0	.583 14.8	.189 4.8	.134 3.4	.067 1.7	.030 0.75	
	DBN1-14	.118 3.0	.551 14.0	.740 18.8					
	DBN1-18	.087 2.2	.709 18.0	.898 22.8					
	DBNS1-18	.079 2.0							
16-14 A.W.G. 1.5-2.5 mm ²	DBN2-10	.094 2.4	.394 10.0	.583 14.8	.189 4.8	.161 4.1	.091 2.3	.031 0.8	
	DBN2-14	.094 2.4	.551 14.0	.740 18.8					
	DBNL2-14	.118 3.0							
	DBNS2-18	.079 2.0	.709 18.0	.898 22.8					
	DBN2-18	.087 2.2							
	DBNL2-18	.110 2.8							
12-10 A.W.G. 4-6mm ²	DBN5-10	.110 2.8	.394 10.0	.236 16.0	.236 6.0	.220 5.6	.134 3.4	.039 1.0	
	DBNS5-14	.157 4.0	.551 14.0	.787 20.0					
	DBN5-14	.177 4.5	.551 14.0			.945 24.0			
	DBNS5-18	.709 18.0	.709 18.0	.228 5.8			.142 3.6		
	DBN5-18	.177 4.5	.709 18.0	.220 5.6			.134 3.4		



针形裸端頭 NEEDLE SHAPE NAKED TERMINAL

端子材料：紫銅

TERMINAL MATERIAL: COPPER

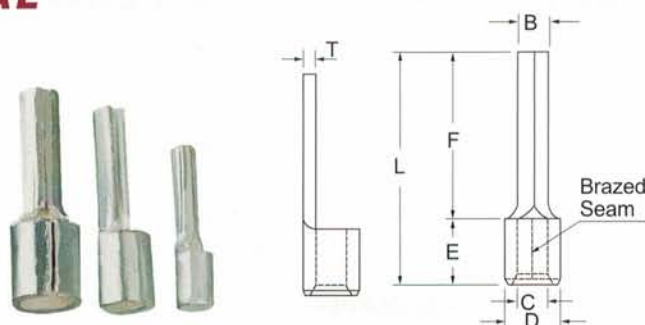

线范围 WIRE RANGE A.W.G. mm ²	项 目 ITEM NO.	尺寸 英寸 DIMENSION inch mm						
	焊 缝 WELDING SEAM	B	F	L	E	D	C	T
26-22 A.W.G. 0.2-0.5 mm ²	PTN0.5-9	.055 1.4	.394 10.0	.551 14.0	.157 4.0	.087 2.2	.039 1.0	.020 0.5
22-16 A.W.G. 0.5-1.5 mm ²	PTN1-9	.075 1.9	.354 9.0	.543 13.8	.189 4.8	.134 3.4	.067 1.7	.030 0.75
	PTN1-10		.394 10.0	.583 14.8				
	PTN1-12		.472 12.0	.661 16.8				
	PTN1-13		.512 13.0	.701 17.8				
	PTN1-14		.551 14.0	.740 18.8				
	PTN1-16		.630 16.0	.819 20.8				
16-14 A.W.G. 1.5-2.5 mm ²	PTN2-9	.075 1.9	.354 9.0	.543 13.8	.189 4.8	.161 4.1	.091 2.3	.031 0.8
	PTN2-10		.394 10.0	.583 14.8				
	PTN2-12		.472 12.0	.661 16.8				
	PTN2-13		.512 13.0	.701 17.8				
	PTN2-16		.630 16.0	.827 21.0				
12-10 A.W.G. 2.5-6 mm ²	PTN5-13	.110 2.8	.551 14.0	.787 20.0	.236 6.0	.220 5.6	.134 3.4	.039 1.0
8 A.W.G. 10 mm ²	PTN10-12	.169 4.3	.551 14.0	.866 22.0	.315 8.0	.272 6.9	.177 4.5	.043 1.1
6 A.W.G. 16 mm ²	PTN16-13	.217 5.5	.630 16.0	1.024 26.0	.394 10.0	.331 8.4	.228 5.8	.047 1.2
4 A.W.G. 25 mm ²	PTN25-15	.268 6.8	.787 20.0	1.319 33.5	.531 13.5	.374 9.5	.276 7.0	.047 1.2
2 A.W.G. 35 mm ²	PTN35-20	.315 8.0	.965 24.5	1.594 40.5	.630 16.0	.465 11.8	.331 8.4	.059 1.5
1/0 A.W.G. 50 mm ²	PTN50-20	.374 9.5	1.024 26.0	1.772 45.0	.748 19.0	.535 13.6	.378 9.6	.098 1.8
2/0 A.W.G. 70 mm ²	PTN70-25	.433 11.0	1.220 31.0	2.165 55.0	.945 24.0	.622 15.8	.449 11.4	.079 2.0
3/0 A.W.G. 95 mm ²	PTN95-25	.492 12.5	1.220 31.0	2.165 55.0	.945 24.0	.744 18.9	.531 13.5	.098 2.5



圓形冷壓端頭 CIRCULAR COLD PRESS TERMINAL

端子材料：紫銅

TERMINAL MATERIAL: COPPER



项 目 ITEM NO.	尺寸 DIMENSION						
	φ	B	L	E	D	C	T
OT0.5-3	3.2	6	13	4	2.2	1.2	0.5
OT0.5-4	4.2	7	14	4	2.2	1.2	0.5
OT1-3	3.2	6	14.4	5	3.2	1.7	0.7
OT1-4	4.3	7.6	16.6				
OT1-5	5.3	9.7	19.3				
OT1-6	6.5	11.4	21.8				
OT1.5-3	3.2	6	14.4	5	3.6	2.0	0.7
OT1.5-4	4.3	7.8	16.6				
OT1.5-5	5.3	9.5	19.3				
OT1.5-6	6.5	11.5	21.5				
OT1.5-8	8.5	15	25				
OT1.5-10	10.5	18	29				
OT1.5-12	12.5	18	29				
OT1.5-16	16.5	24	34				
OT2.5-3	3.2	6.5	15	5	4.2	2.6	0.7
OT2.5-4	4.3	7.6	17				
OT2.5-5	5.3	9.5	19.3				
OT2.5-6	6.5	11	21.4				
OT2.5-8	8.5	15	25				
OT2.5-10	10.5	18	29				
OT2.5-12	12.5	18	29				
OT2.5-14	14.5	24	34				
OT2.5-16	16.5	24	34	6	5.2	3.2	1.0
OT4-4	4.3	8.5	18.1				
OT4-5	5.3	10	20.5				
OT4-6	6.5	12	23.2				
OT4-8	8.5	15	26.5				
OT4-10	10.5	18	31.2				
OT4-12	12.5	19.5	33.2				
OT4-14	14.5	25	38.5				
OT4-16	16.5	25	38.5	7	6.2	4.2	1.0
OT6-4	4.3	9	19.5				
OT6-5	5.3	11	23				
OT6-6	6.5	12	24.5				
OT6-8	8.5	15	27.5				
OT6-10	10.5	18.2	32.3				
OT6-12	12.5	20	34				
OT6-14	14.5	25	39.2				
OT6-16	16.5	25	39.2	8.5	8	5.6	1.2
OT10-4	4.3	10	23.2				
OT10-5	5.3	12	26				
OT10-6	6.5	14	27.5				
OT10-8	8.5	16	30.2				
OT10-10	12.5	17.3	34.3				
OT10-12	12.5	21	38.2				
OT10-14	14.5	23	40.8				
OT10-16	16.5	25	42.1				
OT10-18	18.5	32.2	48.5				
OT10-20	20.6						
OT10-22	22.6						
OT10-24	24.6	40	58.5				
OT10-28	28.6						




圓形冷壓端頭

CIRCULAR COLD PRESS TERMINAL

端子材料：紫銅

TERMINAL MATERIAL: COPPER



项 目	尺寸 DIMENSION										
ITEM N.O.	Φ	B	L	E	D	C	T				
OT16-6	6.3	14.5	32.5	10.5	10	7	1.5				
OT16-8	8.5	18	33.5								
OT16-10	10.5	20.5	38								
OT16-12	12.5	23	41.5								
OT16-14	14.5	30	54	14				12.1	8.5	1.8	
OT16-16	16.5										
OT16-18	18.5										
OT16-20	20.6										
OT16-22	22.6	35	57								
OT16-24	24.6										
OT25-6	6.3				17	33.5					
OT25-8	8.5				21	37.5					
OT25-10	10.5	23	43		14	13.1	9.5				1.8
OT25-12	12.5	24	45								
OT25-14	14.5	26	47								
OT25-16	16.5	30	54								
OT25-18	18.5										
OT25-20	20.6										
OT25-22	22.6										
OT25-24	24.6	35	57								
OT25-27	27.6										
OT25-30	30.6										
OT35-6	6.3			17	35						
OT35-8	8.5	21	38.5	14	15.1	11.5	1.8				
OT35-10	10.5	23	43								
OT35-12	12.5	25	47								
OT35-14	14.5	27	50								
OT35-16	16.5	30	54								
OT35-18	18.5										
OT35-20	20.6										
OT35-22	22.6										
OT35-24	24.6	35	57								
OT35-37	37.7							55	85		
OT50-6	6.3			22	39						
OT50-8	8.5			22	39	14	17.5	13.1	2.2		
OT50-10	10.5	24.5	43.5								
OT50-12	12.5	26	47.5								
OT50-14	14.5	30	54								
OT50-16	16.5										
OT50-18	18.5										
OT50-20	20.6										
OT50-22	22.6	35	57								
OT50-24	24.6										
OT70-6	6.3			22	49						
OT70-8	8.5										
OTS70-10	10.5										
OT70-10	10.5										
OT70-12	12.5	24.5	51	18.5	19.5	15.1	2.2				
OT70-14	14.5	30	60								
OT70-16	16.5										
OT70-18	18.5										
OT70-20	20.6										
OT70-22	22.6	38	65								
OT70-24	24.6										
OT95-8	8.5							23	51		
OT95-10	10.5							27	53		
OT95-12	12.5										
OT95-14	14.5	30	65	20	17.5	13.1	2.2				
OT95-16	16.5										
OT95-18	18.5										
OT95-20	20.6										
OT95-22	22.6	38	70								
OT95-24	24.6										



鳳凰冷壓端頭
PHOENIX COLD PRESS TERMINAL




圆形冷压端头 CIRCULAR COLD PRESS TERMINAL

端子材料：紫铜

TERMINAL MATERIAL: COPPER

项 目 ITEM NO.	尺寸 DIMENSION						
	ϕ	B	L	E	D	C	T
OT120-8	8.5	30	60	22	22.2	17	2.6
OT120-10	10.5						
OT120-12	12.5						
OT120-14	14.5						
OT120-16	16.5						
OT150-8	8.5	31	64	25.5	24.5	18.1	3.2
OT150-10	10.5						
OT150-12	12.5						
OT150-14	14.5						
OT150-16	16.5						
OT185-8	8.5	32	67	27	27.2	20	3.6
OT185-10	10.5						
OT185-12	12.5						
OT185-14	14.5						
OT185-16	16.5						
OT240-8	8.5	38	70	30	32	24	4.0
OT240-10	10.5						
OT240-12	12.5						
OT240-14	14.5						
OT240-16	16.5						
OT300-10	10.5	50.5	103	35	37.5	29	4.2
OT300-12	12.5						
OT300-14	14.5						
OT300-16	16.5						
OT300-18	18.5						
OT300-20	21						

圆形冷压端头 CIRCULAR COLD PRESS TERMINAL

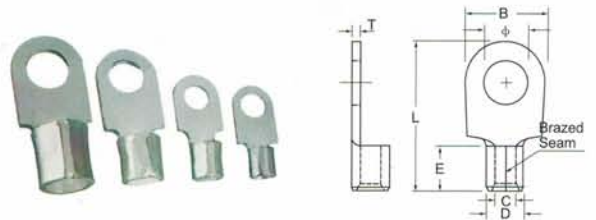


端子材料：紫铜

TERMINAL MATERIAL: COPPER

项 目 ITEM NO.	尺寸 DIMENSION						
	ϕ	B	L	E	D	C	T
OTZ6-6	6.3	10.5	23.5	7	6.2	4.2	1
OTZ10-6	6.3	12	27	8.5	8	5.6	1.2
OTZ10-8	8.5	15	30				
OTZ16-6	6.5	13	30.5	10.5	10	7	1.5
OTZ16-8	8.5	15	35				
OTZ16-10	10.5	17	37				
OTZ25-6	6.5	13	31	12	12.1	8.5	1.8
OTZ25-8	8.5	16	34				
OTZ25-10	10.5	18	40				
OTZ25-12	12.5	18.1	40				
OTZ35-6	6.5	13	35	14	13.1	9.5	1.8
OTZ35-8	8.5	16	40				
OTZ35-10	10.5	18	40				
OTZ35-12	12.5	18.2	40.7				
OTZ50-6	6.5	13	35	14	15.1	11.5	1.8
OTZ50-8	8.5	16	40				
OTZ50-10	10.5	18	40				
OTZ50-12	12.5	18	40.5				



叉形冷压端头 FORK COLD PRESS TERMINAL

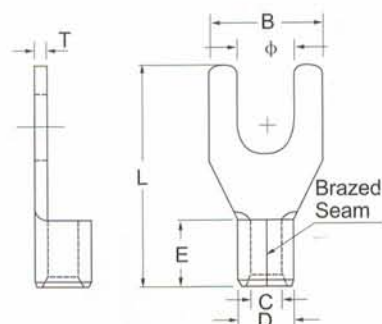


端子材料：紫铜
TERMINAL MATERIAL: COPPER

项 目 ITEM NO.	尺寸 DIMENSION						
	ϕ	B	L	E	D	C	T
UT0.5-3	3.2	6	13.5	4	2.2	1.2	0.5
UT0.5-4	4.2	7	13.8	4	2.2	1.2	0.5
UT1-3	3.2	5.7	15.5	5	3.2	1.7	0.7
UT1-4	4.2	7.1	16				
UT1-5	5.3	9	18.3				
UT1-6	6.3	11.9	21				
UT1.5-3	3.2	5.9	15.5	5	3.6	2.0	0.7
UT1.5-4	4.2	7.3	16.4				
UT1.5-5	5.3	9	18.3				
UT1.5-6	6.3	11.8	20				
UT1.5-8	8.5	14.6	23.7	5	4.2	2.6	0.7
UT2.5-3	3.2	6	15.5				
UT2.5-4	4.2	7.6	17				
UT2.5-5	5.3	9.5	18				
UT2.5-6	6.3	11	20	6	5.2	3.3	1.0
UT2.5-8	8.5	14.8	24.1				
UT4-4	4.2	8.6	18.6				
UT4-5	5.3	9.4	19.6				
UT4-6	6.3	11.8	22.1	7	6.2	4.3	1.0
UT4-8	8.5	14.9	25.2				
UT4-10	10.5	18	27				
UT6-4	4.2	9	19.5	8.5	8	5.7	1.2
UT6-5	5.3	11	21				
UT6-6	6.3	12	23				
UT6-8	8.5	15	26				
UT6-10	10.5	17.4	30	11	10	7	1.5
UT10-4	4.2	10	24				
UT10-5	5.3	10	24				
UT10-6	6.3	12	27				
UT10-8	8.5	14.4	28.6	14	12.1	8.5	1.8
UT10-10	10.5	16.3	31.5				
UT16-5	5.3	11.5	26				
UT16-6	6.5	12.5	29.5				
UT16-8	8.5	16	32	14	13.1	9.5	1.8
UT16-10	10.5	19	33.5				
UT25-6	6.5	16	35				
UT25-8	8.5	18	35				
UT25-10	10.5	20	35	14	13.1	9.5	1.8
UT35-6	6.5	14.5	36				
UT35-8	8.5	17.5	40				
UT35-10	10.5	22	42				



圆形船用裸端头

BARE CIRCULAR TERMINAL FOR WATERCRAFT

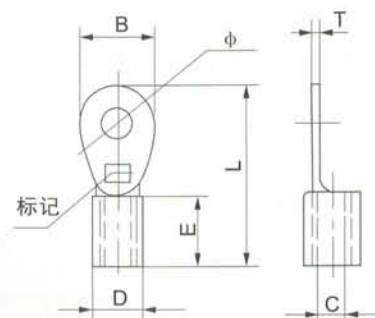

端子材料：紫铜


TERMINAL MATERIAL: COPPER

项 目 ITEM NO.	尺寸 DIMENSION						
	φ	B	L	E	D	C	T
JB1-3	3.2	6	17	7		1.7	0.7
JB1-4	4.2	7.5	18				
JB1-5	5.3	8	18				
JB1-6	6.5	10	20.5				
JB1.5-3	3.2	6	17	7		2	0.7
JB1.5-4	4.2	7.5	18				
JB1.5-5	5.3	8	18				
JB1.5-6	6.5	10	20.5				
JB1.5-8	8.5	13	26	8.5		2.6	0.7
JB2.5-3	3.2	6	17				
JB2.5-4	4.2	8	20				
JB2.5-5	5.3	9	21.5				
JB2.5-6	6.5	10.5	23.5	9		2.8	0.8
JB2.5-8	8.5	13.5	28.5				
JB4-4	4.2	9	22				
JB4-5	5.3	9	22				
JB4-6	6.5	12	27	10		3.5	1.0
JB4-8	8.5	13.5	28.5				
JB4-10	10.5	15.6	29.3				
JB6-4	4.2	11	26				
JB6-5	5.3	11	26	11		4.3	1.2
JB6-6	6.5	12.5	29				
JB6-8	8.5	13.5	29				
JB6-10	10.5	15.5	30				
JB10-4	4.3	10.4	27.2	7		1.7	0.7
JB10-5	5.3	10.5	27				
JB10-6	6.5	12.5	29				
JB10-8	8.5	14	31				
JB10-10	10.5	17.5	35.5	7		2	0.7
JC1-3	3.2	6	16.6				
JC1-4	4.2	7.5	18				
JC1.5-3	3.2	6	16.5				
JC1.5-4	4.2	7.5	18	8.5		2.6	0.7
JC1.5-5	5.3	8.4	19.2				
JC1.5-6	6.5	9.7	20.2				
JC2.5-3	3.2	6	19				
JC2.5-4	4.2	7.5	20.5	9		2.8	0.8
JC2.5-5	5.3	8.3	21				
JC2.5-6	6.5	10.5	22				
JC4-4	4.3	8.3	21.3				
JC4-5	5.3	9.3	21.8	10		3.5	1.0
JC4-6	6.5	11.5	23				
JC6-4	4.3	8.5	22.2				
JC6-5	5.3	10.5	24.3				
JC6-6	6.5	11	25.3	7		1.7	0.7
JZ1		2	19				
JZ1.5		2	19				
JZ2.5		2	20				
JZ4		2.5	22	8.5		2.6	0.7
JZ6		3	24.5	9			
				10		2.8	0.8
						3.5	1.0



针形冷压端头 PIN COLD TERMINAL


端子材料：紫铜
TERMINAL MATERIAL: COPPER

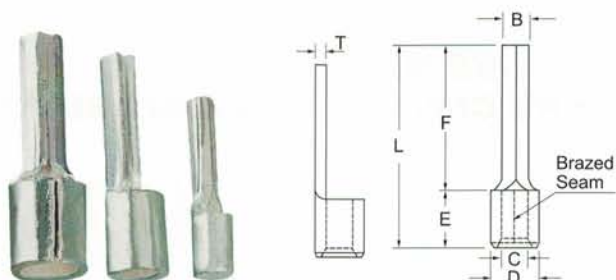

项 目 ITEM NO.	尺寸 DIMENSION						
	ϕ	B	L	E	D	C	T
IT0.5-1	1.5		12	4	2.2	1.2	0.5
IT1-2	1.9		15	5	3.2	1.7	0.7
IT1.5-2	1.9		16		3.6	2.0	
IT1.5-3	2.8		17				0.7
IT2.5-2	1.9		16.5		4.2	2.6	
IT2.5-3	2.8		18	5			0.7
IT4-3	2.8		19	6	5.2	3.2	1.0
IT6-4	3.8		20.5	7	6.2	4.2	1.0
IT10-5	4.8		24	8.5	8	5.6	1.2
IT10-30	4		49.4	9			
IT16-6	6		30	11	10	7	1.5
IT16-30	5		41.5				
IT25-6	6		33	14	12.1	8.5	1.8
IT35-6	6		37	14	13.1	9.5	1.8
IT50-7	7		37.5	14	15.1	11.5	1.8

C45杆片焊缝 C45 INSERTING SLICE WELDING SEAM

端子材料：紫铜
TERMINAL MATERIAL: COPPER

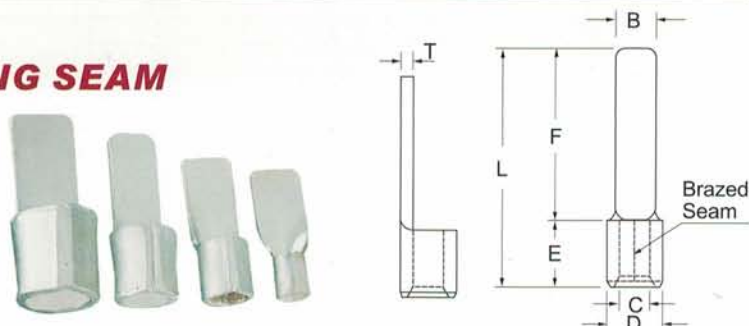

项 目 ITEM NO.	尺寸 DIMENSION						
	ϕ	B	L	E	D	C	T
C45-1.5mm ²	6		17	5	3.6	2.0	0.8
C45-1.5mm ²	6		20	5			
C45-2.5mm ²	6		17	5	4.2	2.6	0.8
C45-2.5mm ²	6		21	5			
C45-4mm ²	6		18	6	5.2	3.2	1.0
C45-4mm ²	6		21	6			
C45-6mm ²	6		19	7	6.2	4.2	1.0
C45-6mm ²	6		22	7			
C45-10mm ²	6		22.5	8.5	8	5.6	1.2
C45-16mm ²	6		25.5	11	10	7	1.5
C45-16mm ²	7		38	11	10	7	1.5
C45-16mm ²	8		25.5	11	10	7	1.5
C45-25mm ²	7		26.5	12	12.1	8.5	1.8
C45-25mm ²	8		30.5	14	13.1	9.5	1.8
C45-35mm ²	8		30.5	14	13.1	9.5	1.8
C45-50mm ²	8		32	14	15.1	11.5	1.8
C45-70mm ²	10		39.5	18.7	17.5	13.1	2.0



旋上式线螺母接头 (内置弹簧的翅膀式)
SCREW-ON WIRE NUT CONNECORS
(WING TYPE WITH SPRING INSERT)



项 目 ITEM NO.	适合的线号及AWG SUTABLE WIRE NO.&A.W.G	尺寸 英寸 DIMENSION inch mm						颜 色 COLOR
		A		B		C		
WN1	MIN #20×1+ #22×1 MAX #16×2	.598	15.2	.339	8.6	.264	6.7	灰 橙 GREY ORANGE 红 RED
WN2	MIN #20×3 MAX #16×3	.693	17.6	.386	9.8	.291	7.4	蓝 橙 BLUE ORANGE 黑 BLACK
WN3	MIN #20×3 MAX #16×3+ #18×1	.866	22.0	.472	12.0	.390	9.9	橙 黄 ORANGE YELLOW 黑 BLACK
WN4	MIN #14×1+ #18×1 MAX #14×4+ #18×1	.965	24.5	.551	14.0	.433	11.0	黄 灰 YELLOW GREY 橙色红 ORANGE RED
WN6	MIN #14×2 MAX #10×2+ #12×2	1.079	27.4	.661	16.8	.500	12.7	红 RED
WN8	MIN #12×3 MAX #10×4	1.286	32.2	.720	18.3	.504	12.8	灰 GREY

冷压端子护套
COLD PRESS TERMINAL SHEATH



塑料PVC阻燃
PLASTIC PVC FLAME-RENTANTCY


型号 ITEMNO	尺寸 DIMENSION				
	D1	D2	D3	L	T
	mm	mm	mm	mm	mm
V-1.5	2.8	3.3	3.1	13±2.0	0.6 ^{+0.3} _{-0.2}
V-2.5	3.3	4.5	3.7	14	0.7
V-4	4.2	5.7	4.1	17	0.8
V-6	4.8	5.7	5.2	17	0.8
V-10	6.2	7.2	6.2	19	1.0
V-16	7.5	10	8	25±2.4	1.1±0.2
V-25	10.5	12	9.5	30	1.2
V-35	12.5	14	11.8	34	1.5
V-60	15	16.8	13.5	39	1.5
V-80	17	19	16	47±3.0	1.6±0.4
V-100	19	22	18	54	1.7
V-120	21	24	20	57	1.8
V-150	23	24.5	22	65	2.0
V-185	27	32	24	65	2.0
V-240	29	38	26.5	77±4.0	2.5±0.6
V-300	29	38	29	77	2.5
V-400	39	44	37	86	2.5
V-500	40.5	45	39.5	86	2.5
V-630	47	52	45	92	2.5



OT 銅開口接線鼻 OT COPPER OPEN CONNECTING NOSE/GT-1


用途
适用于配电装置中导线连接。

Application
Suitable for the connection of copper conductors in distribution equipment.

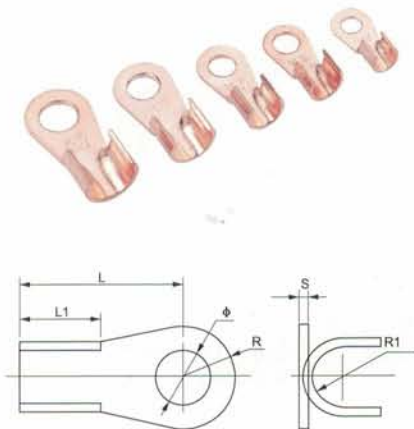

规格型号 Model & Spec	主要尺寸 Dimension(mm)					
	L	L1	S	R	R1	φ
OT-3A	11.5	5	0.5	3.5	1.3	4.2
OT-5A	12.5	5.4	0.6	4.2	1.75	5.2
OT-10A	15	6	0.8	4.7	2	5.2
OT-20A	17	7.4	1	5.5	2.5	6.2
OT-30A	18	8.2	1.1	5.8	3.2	6.2
OT-40A	20	9	1.1	6.1	3.5	6.2
OT-50A	21.5	9	1.2	6.3	3.7	6.2
OT-60A	23	10.5	1.3	7.2	4	8.2
OT-80A	25.5	11	1.4	8	4.5	8.2
OT-100A	29	12	1.5	8.5	5	8.2
OT-150A	31	12.4	1.6	9	5.5	10.4
OT-200A	33	14	1.7	10	6	10.4
OT-250A	36	15.5	1.8	10.5	6.5	10.4
OT-300A	40	17	2	11.5	7	12.4
OT-400A	43	18	2.2	13	8	14.4
OT-500A	46	20	2.4	14.5	8.5	14.4
OT-600A	50.5	23	2.7	16	10.5	16.5
OT-800A	60	30	3.2	17.5	12.5	18.5
OT-1000A	66	33	3.6	20.5	15.5	18.5

DTL 系列铜铝接线端子 DTL COPPER-ALUMINIUM CONNECTING TERMINALS

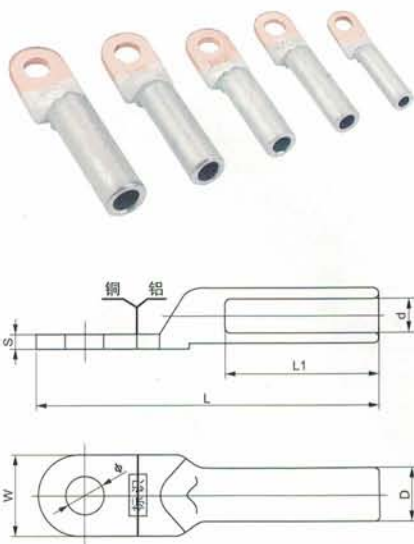

规格型号 Model & Spec	主要尺寸 Dimension(mm)						
	φ	D	d	L	L1	W	S
DTL-10	8.8	10	5.2	65	32	16	2.5
DTL-16	8.8	11	6.1	70	34	16	2.6
DTL-25	8.8	12	7.1	75	37	18	3.2
DTL-35	10.8	14	8.5	85	41	20	3.6
DTL-50	10.8	16	9.8	90	43	23	4.0
DTL-70	13	18	11.5	102	50	26	4.6
DTL-95	13	21	13.5	112	54	28	4.8
DTL-120	14.8/	23	15	120	56	30	5.3
DTL-150	14.8	25	17	126	58	34	5.8
DTL-185	17	27	18.6	133	60	37	6.5
DTL-240	17	30	21.5	140	63	40	7.0
DTL-300	21	34	24	158	70	45	8.5
DTL-400	21	38	27	175	75	52	9.5
DTL-500	21	45	30	190	80	60	10.0
DTL-630	-	50	34.2	225	90	78	11.0

用途


接线端子适用于配电装置中电线、电力电缆与电器设备的连接。DL系列铝接线端子采用1060铝棒料压制、DT系列铜接线端子采用(T2)铜棒压制。

Application

Connecting terminals are suitable for the conjunction of wires, cable in the distribution equipment and the electrical equipment. DL series of aluminum connecting terminals are pressed with aluminium bar(L3), DT series of copper connecting terminals with copper bar(T2).

DT 系列铜接线端子 (堵油型)


DT COPPER CONNECTING TERMINALS

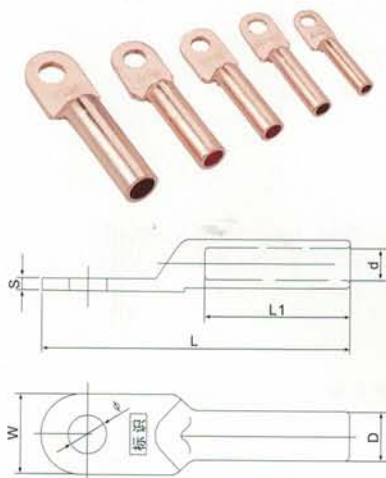

规格型号 Model & Spec	主要尺寸 Dimension(mm)						
	ϕ	D	d	L	L1	W	S
DT-10	8.5	9	5.2	62	26	16	2.5
DT-16	8.5	10	6.1	68	30	16	2.5
DT-25	8.5	11	7.1	70	33	18	2.7
DT-35	10.5	12	8.5	80	36	20.5	3.0
DT-50	10.5	14	9.8	86	38	23	3.4
DT-70	12.5	16	11.5	95	43	26	3.8
DT-95	12.5	18	13.5	104	46	28	4.2
DT-120	14.5	20	15	112	49	30	4.7
DT-150	14.5	22	17	120	51	34	5.5
DT-185	16.5	25	18.6	126	55	37	5.8
DT-240	16.5	27	21.5	137	60	40	6.5
DT-300	21	31	24	158	68	50	8.0
DT-400	21	34	27	175	78	50	9.0
DT-500	21	38	30	186	82	60	10.0
DT-630	21	45	34.2	215	86	80	12.0

DT 系列铝接线端子 (堵油型)

DT ALUMINIUM CONNECTING TERMINALS

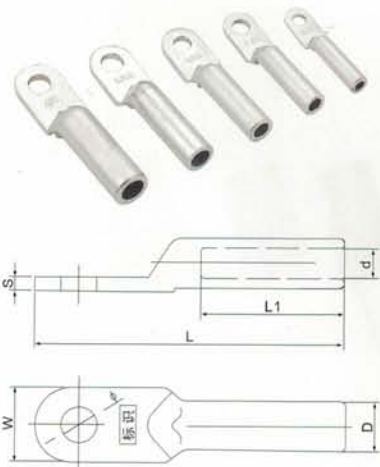

规格型号 Model & Spec	主要尺寸 Dimension(mm)						
	ϕ	D	d	L	L1	W	S
DL-10	8.8	10	5.2	65	32	16	2.5
DL-16	8.8	11	6.1	70	34	16	3.0
DL-25	8.8	12	7.1	75	37	18	3.2
DL-35	10.8	14	8.5	85	41	20	3.6
DL-50	10.8	16	9.8	90	43	23	4.0
DL-70	13	18	11.5	102	50	26	4.5
DL-95	13	21	13.5	112	54	28	5.0
DL-120	14.8	23	15	120	56	30	5.5
DL-150	14.8	25	17	126	58	34	6.0
DL-185	17	27	18.6	133	60	37	6.5
DL-240	17	30	21.5	140	63	40	7.0
DL-300	21	34	24	158	70	45	9.0
DL-400	21	38	27	175	75	52	10.0
DL-500	21	45	30	190	80	60	11.0
DL-630	21	50	34.2	225	90	78	12.0


JG铜接线端头

JG COPPER CONNECTION TERMINAL

用途 Application:

适用于配电装置中电线、电力电缆与电气设备的连接、采用紫铜管料压制，表面镀锡。

型号Type	ϕ	D	d	L
JG-10	6.2	8	5	38
JG-16	8.4	9	6	41
JG-25	8.4	10	7	46
JG-35	8.5	11	8	52
JG-50	8.5	13	10	54
JG-70	10.5	16	12	61
JG-95	10.5	18	14	66
JG-120	12.5	20	15	73
JG-150	12.5	23	17	77
JG-185	14.5	25	19	86
JG-240	16.5	27	21	93
JG-300	16.5	31	24	103
JG-400	18.5	34	26	113
JG-500	20.5	38	30	124
JG-630	22.5	45	35	140
JG-800	22.5	50	40	170

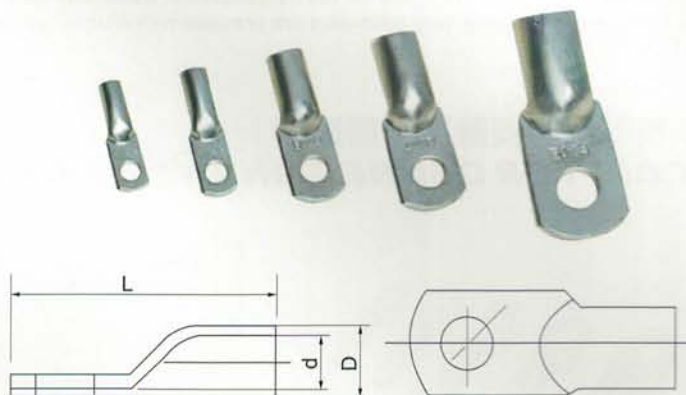


SC(JGK) SC(JGA)引进铜接线端头

SC(JGK) SC(JGA) IMPORT COPPER TERMINAL

用途 Application:


适用于标称截面1.5-1000mm²电力电缆式电线的铜导体与电气设备的连接，采用紫铜管料压制，表面镀锡。

型号Type	ϕ	D	d	L
SC(JGK)-1.5	ϕ f4.2, f5.2	3.5	1.8	18
SC(JGK)-2.5	ϕ f4.2, f5.2, f6.2	4	2.5	19
SC(JGK)-4	ϕ f5.2, f6.2	4.8	3.1	21
SC(JGK)-6	ϕ f5.2, f6.2, f8.2	5.5	3.8	24
SC(JGK)-10	ϕ f6.2, f8.2	6.8	4.8	25.5
SC(JGK)-16	ϕ f6.2, f8.2, f10.5	7.5	5.5	30.5
SC(JGK)-25	ϕ f6.2, f8.2, f10.5	9	7	34
SC(JGK)-35	ϕ f6.2, f8.2, f10.5, f12.5	10.5	8.2	38
SC(JGK)-50	ϕ f8.2, f10.5, f12.5	12.1.5	9.8	45
SC(JGK)-70	ϕ f8.2, f10.5, f12.5	14.5	11.5	50
SC(JGK)-95	ϕ f10.5, f12.5	17.5	13.8	55.5
SC(JGK)-120	ϕ f12.5, f16.5	19.5	15.5	63
SC(JGK)-150	ϕ f12.5, f16.5	21	16.5	71
SC(JGK)-185	ϕ f16.5	23.5	18.8	78
SC(JGK)-240	ϕ f16.5	26.5	21	92
SC(JGK)-300	ϕ f16.5, f20.5	30	24	102
SC(JGK)-400	ϕ f16.5, f20.5	34	26.5	113
SC(JGK)-500	ϕ f16.5, f20.5	38	30	123
SC(JGK)-630	ϕ f20.5, f22.5	45	35	135
SC(JGK)-800	ϕ f20.5, f22.5	50	39	170
SC(JGK)-1000	ϕ f20.5, f22.5	56	44	200

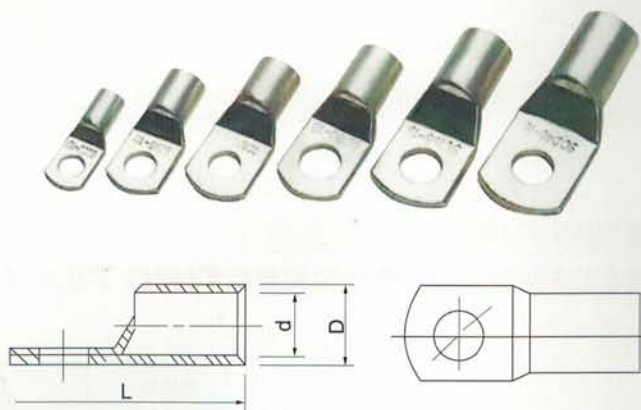

引进C45插针，材料紫铜管，表面镀锡。

型号Type	D	d	L	L1
10 ²	7.5	5	34	13.5
16 ²	8.5	6	35	14
25 ²	10	7	36	14.5
35 ²	11	8	37	15
50 ²	13	10	41	15.5
70 ²	16	12	45	16
95 ²	18	14	50	18
120 ²	20	15	57	20
150 ²	22	17	67	24
185 ²	24	19	77	28
240 ²	26	21	85	31

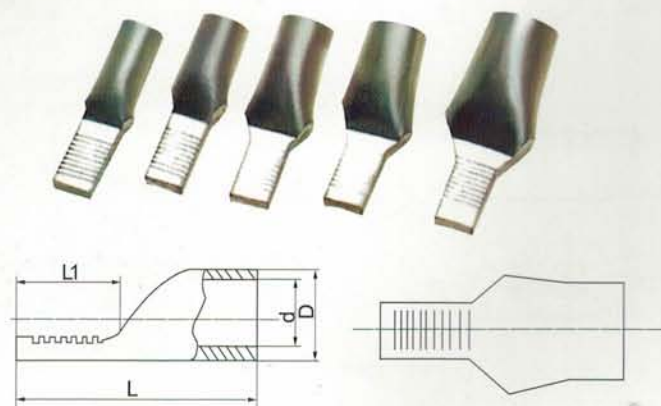




FXT 冷压端子钳 FYT 机械压接钳 FYQ 液压钳
FXT Wire cable pliers connection terminal and others



PC 自锁式尼龙扎带
Self-locking nylon cable ties



PC 螺旋式压线帽
Double wings screw on wire connectors

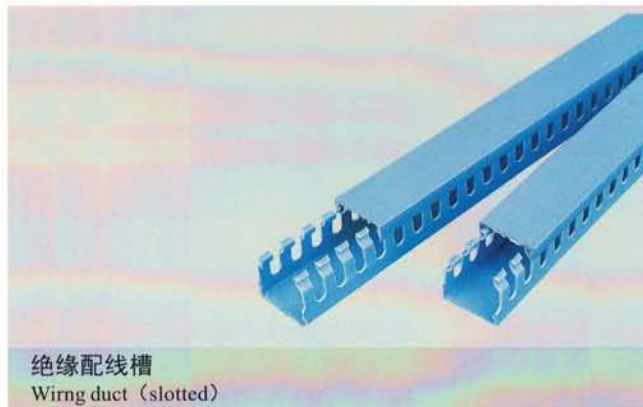


绝缘配线槽
Wirng duct (slotted)



尼龙扎带
Nylon wrap strap

端子类型说明 **TERMINAL TYPE INSTRUCTION:**

R V S 1 - 3.7

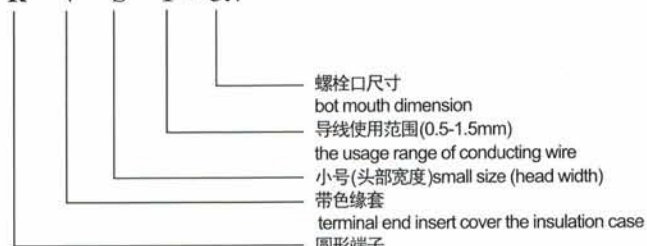

1表示0.5-1.5mm²(红)
2表示1.5-2.5mm²(蓝)
3表示2.5-4mm²(黑)
5表示4-6mm²(黄)
8表示6-10mm²
14表示10-16mm²
22表示16-25mm²
150表示150-185mm²

1represent0.5-1.5mm²(Red)
2represent1.5-2.5mm²(Blue)
3represent2.5-4mm²(Black)
5represent4-6mm²(Yellow)
8represent6-10mm²
14represent10-16mm²
22represent16-25mm²
150represent150-185mm²

S: 小号(头部宽度)
M: 中号(头部宽度)
L: 大号(头部宽度)
NB: 无绝缘套、尾部接缝焊银
D: 端子尾部镀铜套再套绝缘套
R: 圆形端子
S: 叉形端子
Pt: 针形端子
V: 尾部套绝缘套

S:small size (head width)
M:middle size(head width)
L:large size
NB:end junction without insulation sleet weld with silver
D:terminal end insert copper sleeve,then cover the insulation case
R:round shape terminal
S:fork shape terminal
PT:needle shape terminal
V:eng with insulation case

