


NON-INSULATED COPPER TUBULAR LUGS (TLK SERIES)

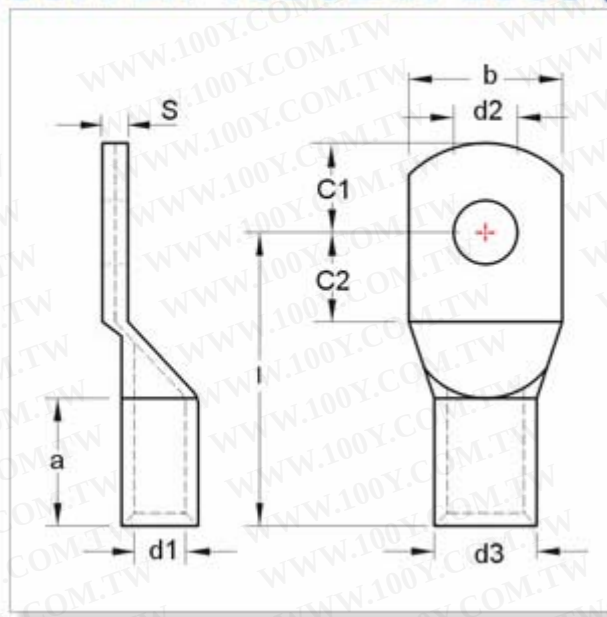

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

MAXIMUM ELECTRIC CURRENT:

A.W.G.	18	16	14	12	10	8	6	4	2	1/0	2/0	3/0	4/0	250	300	350	400	500	600	750
AMP.	17	18	30	35	50	70	95	125	170	230	265	310	360	405	445	505	545	620	690	785

TERMINAL MATERIAL: COPPER TUBULAR

WIRE RANGE A.W.G. mm ²	ITEM NO.	DIMENSION (mm)									Q'TY BOX
		a	b	C1	C2	d1	d2	d3	I	S	
4/0 A.W.G. 120 mm ²	 TLK120-8	26	28	14	14	15	8.4	19.5	51	4.3	25
	 TLK120-10	26	28	14	14	15	10.5	19.5	51	4.3	25
	 TLK120-12	26	28	14	14	15	13	19.5	51	4.3	25
	 TLK120-14	26	28	15	15	15	15	19.5	52	4.3	25
	 TLK120-16	26	30	16	16	15	17	19.5	54	4	25
	 TLK120-20	26	36	22	22	15	21	19.5	63	3.5	25
250/300 MCM 150 mm ²	 TLK150-8	30	31	14	14	16.5	8.4	21	56	4.3	25
	 TLK150-10	30	31	14	14	16.5	10.5	21	56	4.3	25
	 TLK150-12	30	31	15	15	16.5	13	21	57	4.3	25
	 TLK150-14	30	31	15	15	16.5	15	21	57	4.3	25
	 TLK150-16	30	31	16	16	16.5	17	21	58	4.3	25
	 TLK150-20	30	36	22	22	16.5	21	21	66	3.6	25
300/350 MCM 185 mm ²	 TLK185-10	30	35	18	18	19	10.5	24	65	4.7	10
	 TLK185-12	30	35	18	18	19	13	24	65	4.7	10
	 TLK185-14	30	35	18	18	19	15	24	65	4.7	10
	 TLK185-16	30	35	18	18	19	17	24	65	4.7	10
	 TLK185-20	30	39	22	22	19	21	24	69	4.3	10
400 MCM 240 mm ²	 TLK240-10	35	39	21.5	19	21	10.5	26	72	4.8	10
	 TLK240-12	35	39	21.5	19	21	13	26	72	4.8	10
	 TLK240-14	35	39	21.5	19	21	15	26	72	4.8	10
	 TLK240-16	35	39	21.5	19	21	17	26	72	4.8	10