

RoHS Compatible

★★★★☆

SIGN	DATE	DESCRIPTION	APPROVER
A			
A			
A			



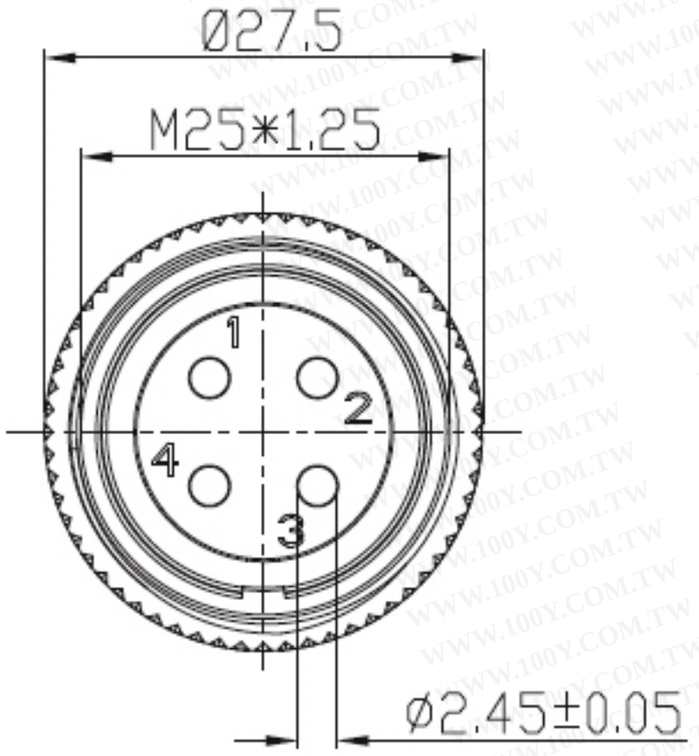

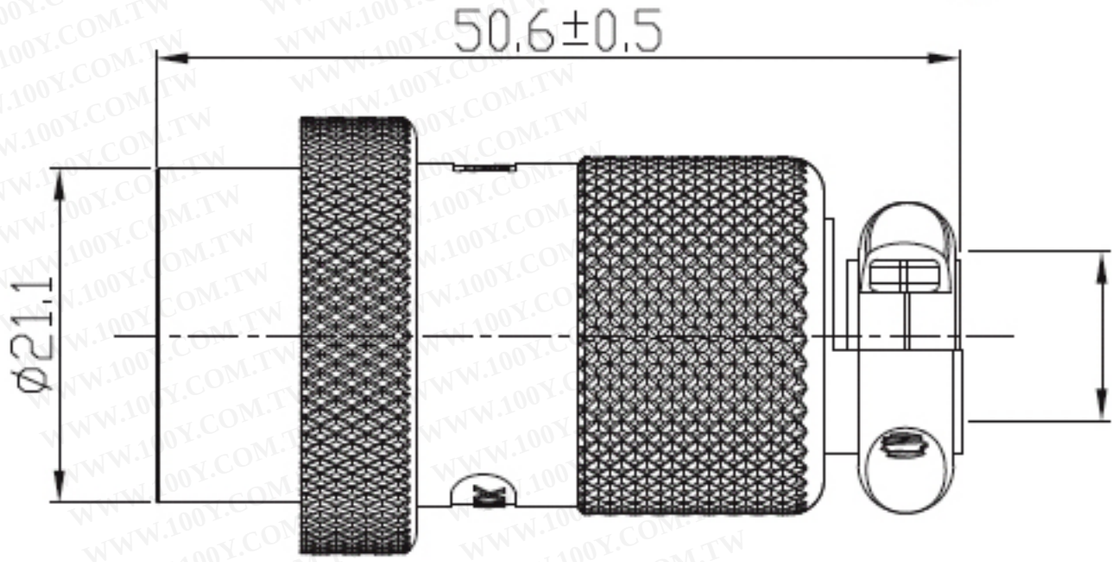

Note:

Rated current : 10A
Rated voltage : 250V
Withstanding voltage(AC.V.rms)1 minute: >=2000V
Insulation resistance (MΩ MIN) at DC 500V: >=2000 MΩ
Contact resistance (mΩ MAX) at DC 1A: <=3mΩ
Operation temperature : -40°C ~ +65°C

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

TITLE: CS3系列4PIN接線公頭					
PART NO.: CS3P-04APNS-00			CUSTOMER P/N:		
APP BY	CHK BY	RF BY	DES BY	UNITS: mm SCALE: 1/1 REVISION: A	Tolerance X.X ±0.2 X.XX ±0.10 X° ±1