
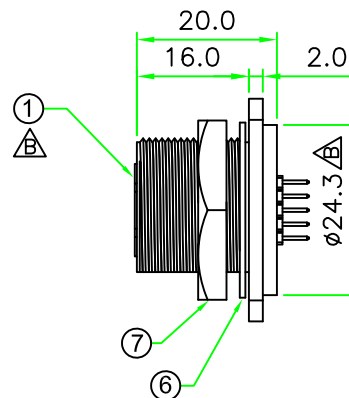
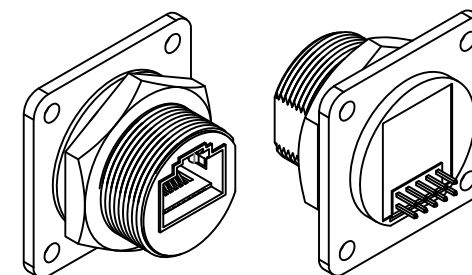
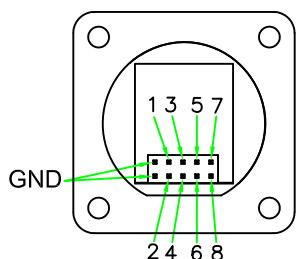

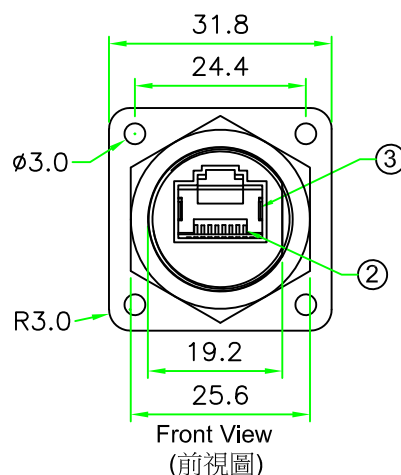
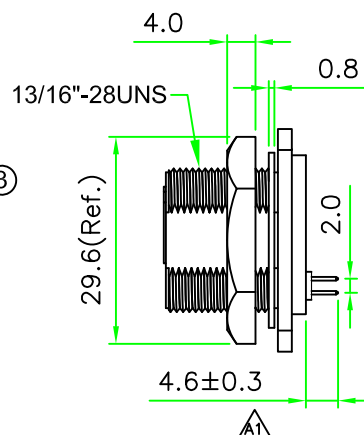
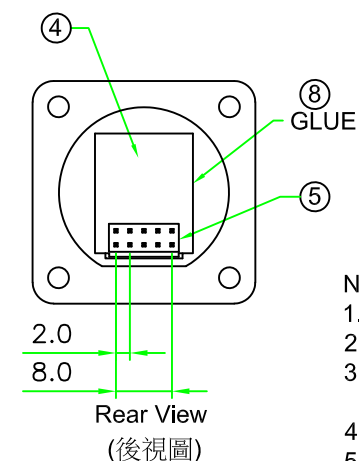


RoHS

RECOMMEND
PANEL CUT OUT

勝特力電材超市-龍山店 886-3-5773766
 勝特力電材超市-光復店 886-3-5729570
 勝特力電子(上海) 86-21-34970699
 勝特力電子(深圳) 86-755-83298787
<http://www.100y.com.tw>

PIN ASSIGNMENT
REAR VIEW(後視圖)PIN ASSIGNMENT
FRONT VIEW(前視圖)Front View
(前視圖)Rear View
(後視圖)

NOTES:

1. Current Rating: 1A
2. Voltage Rating: 150 VAC Max.
3. Connector Temperature Range: -25°C to 85°C
4. Contact Resistance: $\leq 30\text{m}\Omega$
5. Insulation Resistance: $\geq 100\text{M}\Omega$
6. Request Panel Thickness Max. 6.0

Old P/N : RJ45C-JPSSS

8	GLUE	Epoxy.	BLACK		
7	HEX NUT	Nylon+GF.	BLACK	1	
6	GASKET	EPDM.	BLACK	1	
5	CONNECTOR	Pin Header, Straight Angle, Pitch 2.0mm, 5 P x 2 Row.	BLACK	1	
4	PCB	FR4. Double Side, 1.0mm Thickness.		1	
3	GROUND	Ground Contact. SUS304.		2	
2	CONTACT	RJ45 Pin Contact. Phos. Bronze 50u" Gold Plating.		1	
1	CONNECTOR	RJ45 Jack Connector Insert. Nylon+GF.	BLACK	1	
No.	PART NAME	DESCRIPTION	COLOR	Q'TY	REMARKS

UNLESS OTHERWISE SPECIFIED TOLERANCES: X ± 0.5 XX ± 0.25 XXX ± 0.1 ANGLE ± 1°	UNIT: mm	TITLE : RJ45 C Size Panel Connector Rear Mount Screw Type Square Flange With 10P Straight Pin Header	
	SCALE 1:1	P/N: RJ45C-P3Q01	DR. SIBYL CH. JAMES
REV. B	SHEET 1/1	DWG.NO: RJ45C-P3Q01	AP.