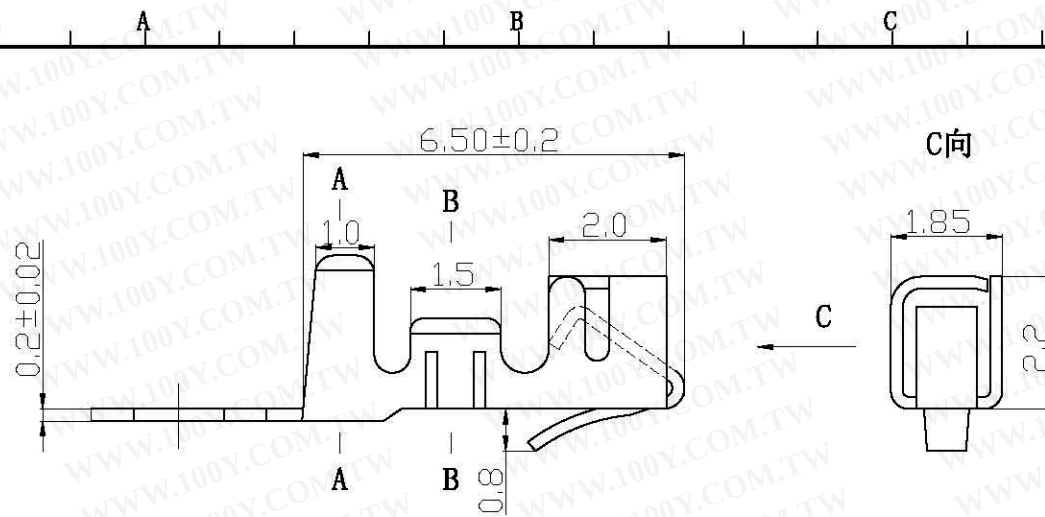
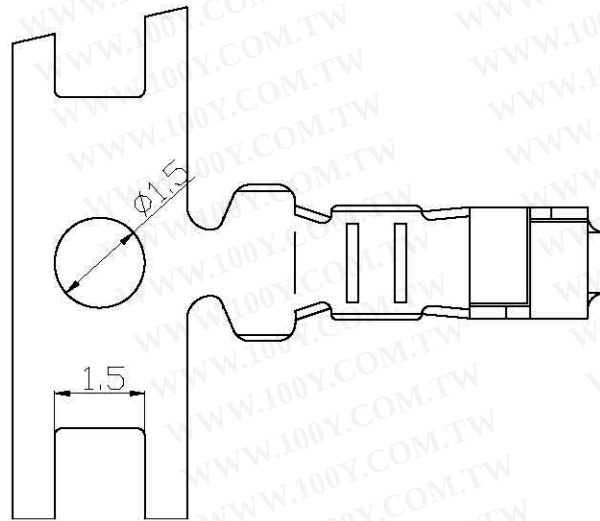


技术参数 (SPECIFICATIONS)

- ◆ 额定电压: 250V AC DC
Voltage rating: 250V AC DC
- ◆ 额定电流: 3.0A AC DC MIN
Current rating: 3.0A AC DC MIN
- ◆ 耐压值: 1000V AC/minute
Withstand voltage: 1000V AC/minute
- ◆ 绝缘电阻: 1000MΩ MIN
Insulation resistance: 1000MΩ MIN
- ◆ 接触电阻: 0.02Ω MAX
Contact resistance: 0.02Ω MAX
- ◆ 工作温度: -25° C~+85° C
Working Temperature: -25° C~+85° C
- ◆ 间距: 2.5 mm
Pitch: 2.5 mm

材料 (MATERIAL)

- ◆ 端子: 磷青铜
Terminal: Phosphor Bronze

胜特力材料 886-3-5753170
 胜特力电子(上海) 86-21-34970699
 胜特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

GENERAL TOLERANCE	
XX. ±0.25	XXX. ±0.40
X. ±0.20	.XXX ±0.05
.X ±0.15	X.° ±2°
.XX ±0.10	.X° ±1°

SCALE
UNIT mm
SIZE A4

DRAWIN
CHECK
APPROVE

DATE	20131018
DATE	20131018
DATE	20131018

DWG. NO.	F:\XH
PARTS NO.	XH-T

TITLT.	成品图
--------	-----

REV.	A
SHEET.	1/1