
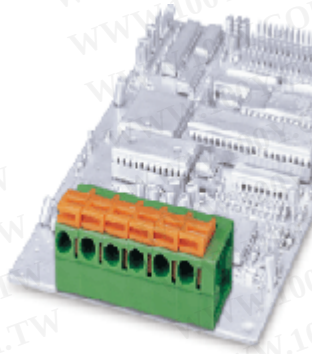




規格圖 / 配件說明

Pitch: 5.08mm

Approval		
Technical Data	UL	IEC
Rated voltage	300V	380V
Rated current	10A	16A
Wire range		1.5mm ²
Solid wire (AWG)	22~14	
Stranded wire (AWG)	22~14	
Insulation withstand voltage		4KV
Wire strip length	6~7mm	
Pole	Cat. No.	
02	142R-02P	
03	142R-03P	
04	142R-04P	
⋮	⋮	
⋮	⋮	
22	142R-22P	
23	142R-23P	
24	142R-24P	

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)