



□172x150x51 mm
(□6.77x6x1.5 in)



Frame: Die cast aluminum, Painted Black

Impeller: Steel(black)

Operating Temperature Range: -20°C ~ +70°C

Operating Voltage Range: Rated Voltage ±10%

Bearing: Ball **IP54**

Motor Structure: AC Induction Capacitor Motor

Motor protection: Thermal Protected (Auto Restart)

Termination: Terminals or Lead wire 300mm


Package: 940g/ PC X-1080g/PC, 12PCS / CTN




Advantage

1. High airflow.
2. High stable.

Dimension (units:mm)

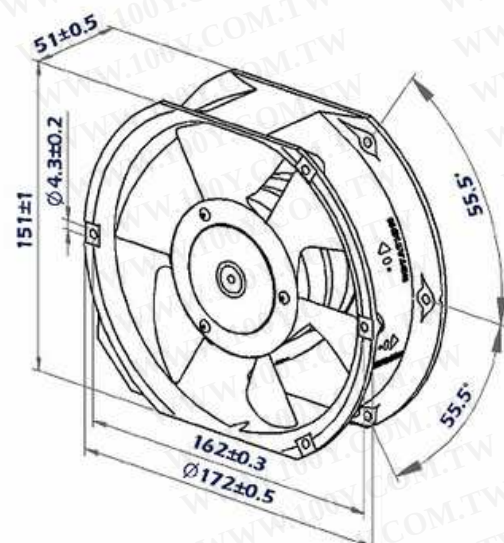

Characteristic Curves

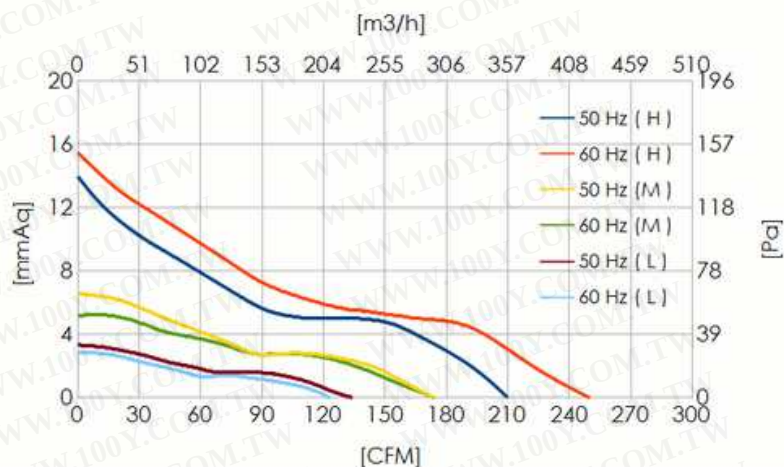

SPECIFICATION

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Model	Voltage (V)	Freq. (Hz)	Current (A)	Power (W)	Speed (RPM)	Air Flow (CFM)	Pressure (mmAq)	Noise (dB)
CYM11751XBT(L)	115	50/60	0.27/0.23	26	2800/3300	220/260	16.5/20	55/61
CYM21751XBT(L)	230	50/60	0.1/0.11	23/26	2800/3300	220/260	16.5/20	55/61
CYM11751HBT(L)	115	50/60	0.25/0.21	27/25	2700/3100	210/250	14/15.5	53/59
CYM21751HBT(L)	230	50/60	0.11/0.12	26/27	2700/3100	210/250	14/15.5	53/59