6,77” x 5,9” x 1,496” 172 x 150 x 38 mm

Series 148V

ETRI

AC Axial Fans

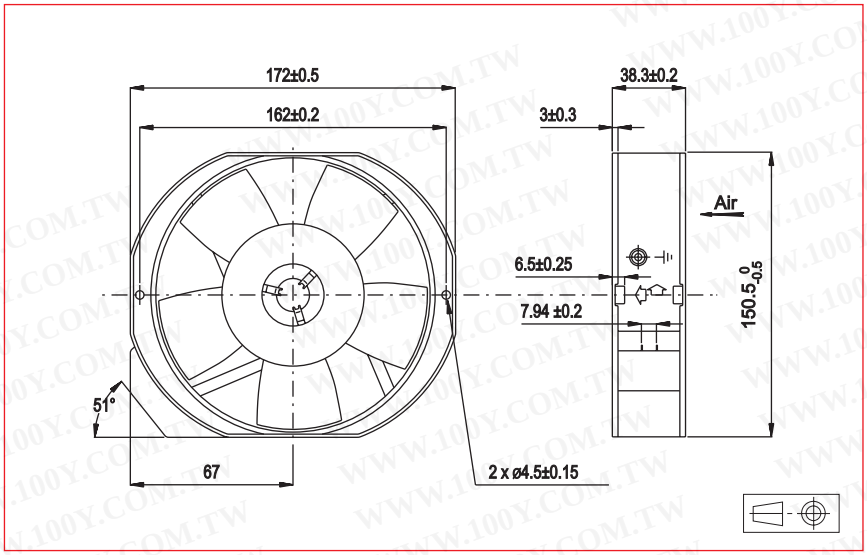

Approvals

CE cULus CSA RoHS

AC Motor

Electrical protection: thermally protected
Housing material: zamak
Impeller material: plastic UL 94 VO
Weight: 1,1 kg
Bearing system: ball bearings

Available with:

- Flying leads
- Speed sensor

Life expectancy

L-10 LIFE AT 40°C:
80 000 hours

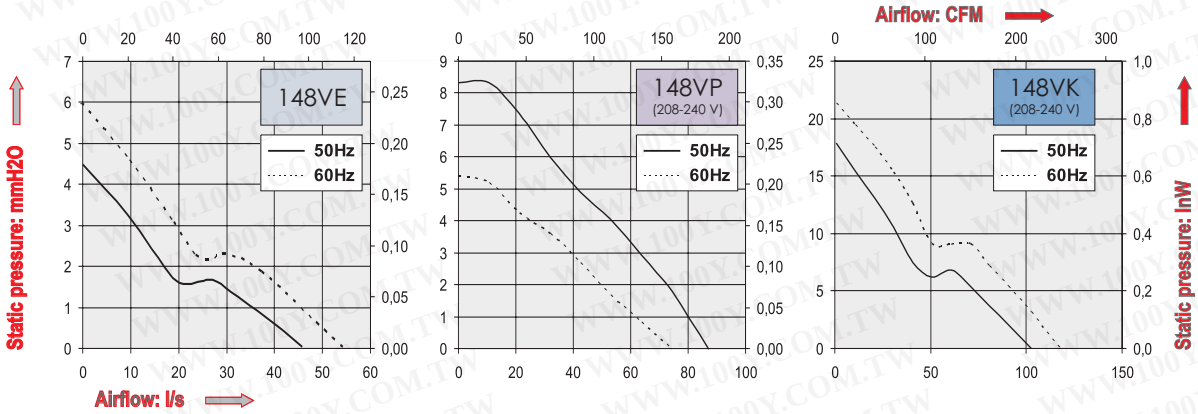

Part Number	Nominal voltage	Airflow	Noise level	Nominal speed	Frequency	Phases	Capacitor	Input Power	Nominal current	Starting current	Connection type		Operating temperature	
	V	l/s	dB(A)	RPM	Hz		µF	W	mA	mA	Leads	Terminals	Min.°C	Max.°C
148VE0282000	115	49	36	1400	50	1	1	11	100	140		X	-10	70
		58	39	1650	60	1	1	11	90	140		X	-10	70
148VE0281000	208-240	49	36	1400	50	1	0,32	13	60	80		X	-10	70
		58	39	1650	60	1	0,32	14	60	80		X	-10	70
148VP0282000	115	81	50	2350	50	1	2,2	14	120	170		X	-10	70
		70	45,5	2100	60	1	2,2	18	160	180		X	-10	70
148VP0281000	208-240	82	49	2400	50	1	0,69	16	70	100		X	-10	70
		70	44	2000	60	1	0,69	22	100	105		X	-10	70
148VK0282000	115	100	54	2850	50	1	2,7	32	300	610		X	-10	70
		119	57	3300	60	1	2,7	32	270	590		X	-10	70
148VK0281000	208-240	100	53	2800	50	1	2,2	35	200	390		X	-10	55
		117	57	3200	60	1	2,2	33	170	370		X	-10	55

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

Additional versions:
Other weight: 830 g - Aluminium impeller - salt spray protected - shock and vibration protected - marine specifications - wide temperature range
IP54: consult factory

Accessories:
Refer to Accessories leaflet

Non contractual document. Specifications are subject to change without prior notice. Pictures for information only. Edition 2008