




勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-34970699
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Specifications										
Model No.	Bearing	Rated Voltage	Frequency	Max. Input Current	Max. Input Power	Speed	Max.Air Flow	Max.Air Pressure	Noise	Weight
		Vac	Hz	A	W	R.P.M	CFM	IN H ₂ O	dB-A	
KA1725HA1SAT(L)	Sleeve	115	50/60	0.43/0.48	39.3/59.6	2700/3000	194.6/218.2	0.31/0.51	52.3/54.7	
KA1725HA1BAT(L)	Ball	115	50/60	0.43/0.48	39.3/59.6	2700/3000	194.6/218.2	0.31/0.51	52.3/54.7	
KA1725HA2SAT(L)	Sleeve	230	50/60	0.23/0.27	38.4/47.9	2700/3000	196.0/217.7	0.29/0.49	51.3/53.9	930
KA1725HA2BAT(L)	Ball	230	50/60	0.23/0.27	38.4/47.9	2700/3000	196.0/217.7	0.29/0.49	51.3/53.9	930
KA1725HA3BAT	Ball	380	50/60	0.105/0.084	37.1/29.7	2700/3000	196.0/217.7	0.29/0.49	51.3/53.9	

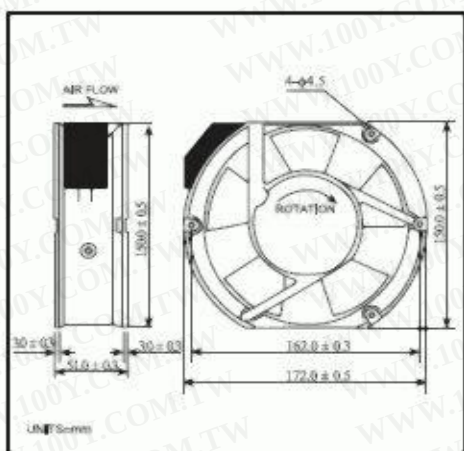