

120x120x38 mm

170.0~190.0 CFM




### Specifications


| Model                | Bearing      | Rating Voltage (VDC) | Power Current (mA) | Power Consumption (WATTS) | Speed (RPM) | Air Flow (CFM) | Static Pressure (Inch-H <sub>2</sub> O) | Noise (dB(A)) | Weight (g) | Curve |
|----------------------|--------------|----------------------|--------------------|---------------------------|-------------|----------------|-----------------------------------------|---------------|------------|-------|
| PMD1212PMB1-A (2).GN | 2BALL Sleeve | 12                   | 1600               | 19.2                      | 4200        | 190.0          | 0.65                                    | 54.0          | 330.0      | 1     |
| PMD1212PMB2-A (2).GN | 2BALL Sleeve | 12                   | 1200               | 14.4                      | 3800        | 170.0          | 0.54                                    | 51.0          | 330.0      | 2     |
| PMD2412PMB1-A (2).GN | 2BALL Sleeve | 24                   | 760                | 18.2                      | 4200        | 190.0          | 0.65                                    | 54.0          | 330.0      | 1     |
| PMD2412PMB2-A (2).GN | 2BALL Sleeve | 24                   | 570                | 13.7                      | 3800        | 170.0          | 0.54                                    | 51.0          | 330.0      | 2     |
| PMD4812PMB1-A (2).GN | 2BALL Sleeve | 48                   | 400                | 19.2                      | 4200        | 190.0          | 0.65                                    | 54.0          | 330.0      | 1     |
| PMD4812PMB2-A (2).GN | 2BALL Sleeve | 48                   | 300                | 14.4                      | 3800        | 170.0          | 0.54                                    | 51.0          | 330.0      | 2     |

勝特力材料 886-3-5753170  
 勝特力电子(上海) 86-21-34970699  
 勝特力电子(深圳) 86-755-83298787  
[Http://www.100y.com.tw](http://www.100y.com.tw)

### Air Flow-Static Pressure Characteristics

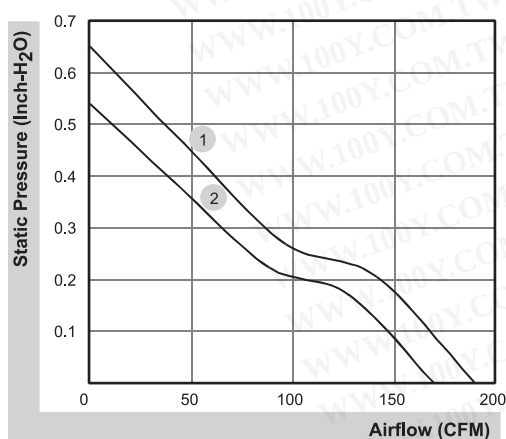

### External dimensions(mm)

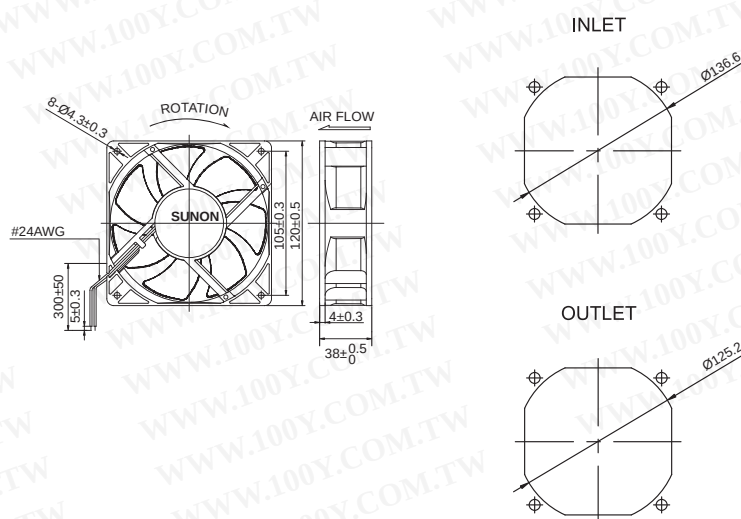

\*All model could be customized. Please contact with Sunon Sales.

\*Specifications are subject to change without notice. Please Visit SUNON website at <http://www.sunon.com> for update information.