
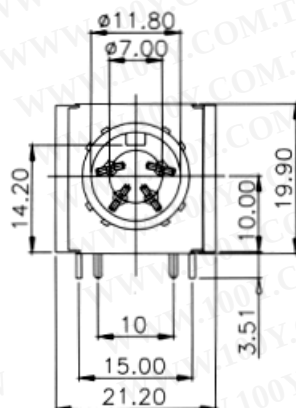
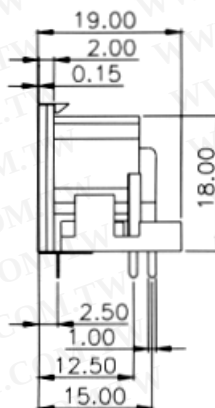
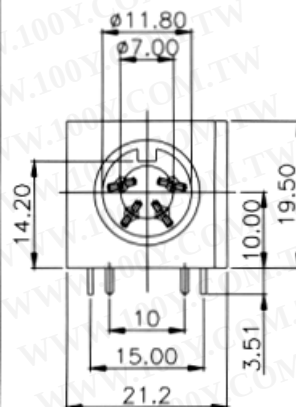


CIRCULAR DIN JACK

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

Dimension (m/m)

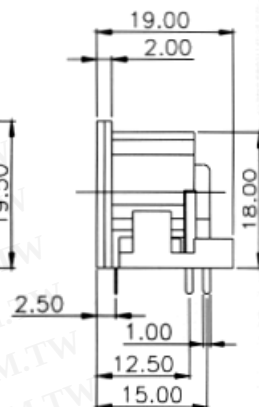

Circuit

3P

4P

5P







6P

7P

8P



P.C.B Layout
Jack Bottom View



Material

- | | | |
|--------------|---|-------------------|
| 1. Insulator | : | Thermoplastic PBT |
| 2. Contact | : | Black, UL94V-0 |
| 3. Shield | : | Phosphor bronze |
| | : | Copper alloy |

Specification

1. Rating : 100VAC 1A max.
12VDC 2A max.
2. Dielectric withstanding :
500VAC, 60HZ for 1 minute
3. Insulation resistance (initial)
100M Ω (min.) at 500V DC
4. Contact resistance (initial)
30m Ω max. at AC100mA(max) 1KHz
5. Insertion & Extraction force
Initial : 4.5kg max
Extraction force : 0.9 to 3.0kgs

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)