REED RELAY
EDR1,2,3 SERIES

cULus E155181(R)



SIP (PIN OUT:1357)



DIP



SMD



SIP (PIN OUT:1267)



HIGH INSULATION (DIP)



HIGH INSULATION (SMD)

■ FEATURES

- Miniature, cost-effective switching solution
- Molded construction for compatibility with automatic board processing
- Completely washable
- Dip type construction with the same terminal pitch as ICs or TTLs
- The high sensitivity allows direct driving by TTL, etc.
- Magnetic shield cover is available
- Electrostatic shield cover is available

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

■ SPECIFICATIONS

1.COIL RATING

Contact form	Nominal Voltage(VDC)	Max. Operate Voltage(VDC)	Pull-in Voltage(VDC)	Dropout Voltage(VDC)	※Coil Resistance(Ω)	Nominal input power(mW)
1A	5	16	3.75	0.8	500±10%	50
	12	20	9.00	1.0	1000±10%	144
	24	32	18.00	2.0	2150±10%	268
2A	5	11	3.75	0.8	140±10%	179
	12	20	9.00	1.0	500±10%	288
	24	32	18.00	2.0	2150±10%	268
1B	5	6	4.20	0.6	500±10%	50
	12	14.5	9.00	1.0	1000±10%	144
	24	29	18.00	2.0	2150±10%	268
1C	5	11	3.75	0.8	200±10%	125
	12	20	9.00	1.0	500±10%	288
	24	32	18.00	2.0	2150±10%	268

※Special design are available on request.

2.CONTACT RATING

Contact form		1A	2A	1B	1C
Switching current		0.5 ADC Max.	0.5 ADC Max.	0.5 ADC Max.	0.2 ADC Max.
Carry current		1.0 ADC Max.	1.0 ADC Max.	1.0 ADC Max.	0.5 ADC Max.
Switching power		10 VA Max.	10 VA Max.	10 VA Max.	3 VA Max.
Electrical life		1×10^8 (Ref 10VDC,10mA)	1×10^8 (Ref 10VDC,10mA)	1×10^8 (Ref 10VDC,10mA)	5×10^7 (Ref 5VDC,1mA)
Contact resistance		150 mΩ Max.	150 mΩ Max.	150 mΩ Max.	150 mΩ Max.
Operate time		1.0 ms Max. (including bounce time)	1.0 ms Max. (including bounce time)	1.0 ms Max. (including bounce time)	1.5 ms Max. (including bounce time)
Release time		0.5 ms Max.	0.5 ms Max.	0.5 ms Max.	2.0 ms Max.
Maximum voltage		100 VDC Max.	100 VDC Max.	100 VDC Max.	30 VDC Max.
Insulation resistance		10^{10}Ω Min. (at 100 VDC)	10^{10}Ω Min. (at 100 VDC)	10^{10}Ω Min. (at 100 VDC)	10^9Ω Min. (at 100 VDC)
Dielectric strength	Coil to contact	1400 VDC Min. (Gene ral) 4000 VDC Min. (high insulation)	1400 VDC Min.	1400 VDC Min.	1400 VDC Min.
	Across contacts	250 VDC Min.	250 VDC Min.	250 VDC Min.	150 VDC Min.
Temperature range	Operating temperature	-40℃ ~ +85℃	-40℃ ~ +85℃	-40℃ ~ +85℃	-40℃ ~ +85℃
	Storage temperature	-55℃ ~ +125℃	-55℃ ~ +125℃	-55℃ ~ +125℃	-55℃ ~ +125℃
Shock resistance		30G Min.	30G Min.	30G Min.	30G Min.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

■ PART NUMBER SYSTEM

EDR 1 0 1A 05 00 Z

- Z: RoHS Compliant
- Special code: 00~99
  - 00: Pin out 1357
  - 50: Pin out 1267
- Nominal voltage:
  - 05: 5 VDC, 12: 12VDC, 24: 24VDC
- Contact form: 1A: Open type, 1 form A
- Function:
  - 0: Normal function
  - D: With diode type
  - M: With magnetic shield type
  - N: With diode and magnetic shield type
- Type: 1: SIP type
- Series name

EDR 2 0 1A 05 00 Z

- Z: RoHS Compliant
- Special code: 00~99
- Nominal voltage:
  - 05: 5VDC, 12: 12VDC, 24: 24VDC
- Contact Form:
  - 1A: Open type, 1 form A
  - 2A: Open type, 2 form A
  - 1B: Close type, 1 form B
  - 1C: 1 open 1 close type, 1 form C
- Function:
  - 0: Normal function
  - D: With diode type
  - H: High insulation
  - K: High insulation with diode type
  - M: Normal function with magnetic shield
  - N: Diode type with magnetic shield
  - E: With electrostatic shield (Apply to 1A &2A)
  - F: With electrostatic shield and diode type(Apply to 1A&2A)
- Type:
  - 2: DIP type
  - 3: SMD type
- Series name


勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

■ DIMENSIONS


SIP TYPE

DIMENSIONS Unit:mm(inch)

EDR10(D)1AXXXX (PIN OUT 1357)

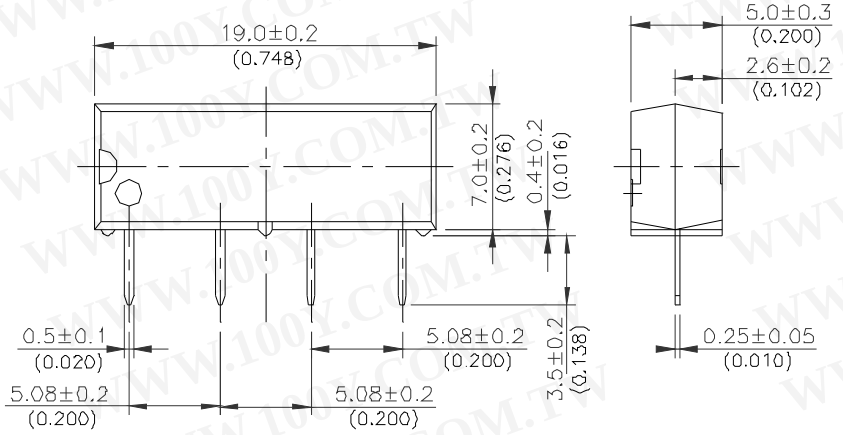


Wiring diagram (Top View)

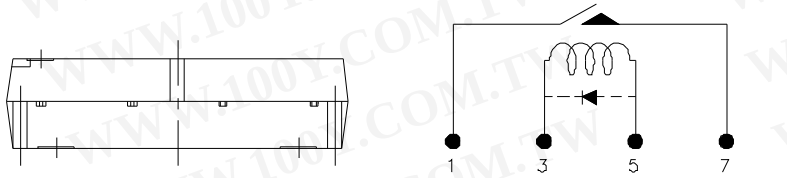


DIMENSIONS Unit:mm(inch)

EDR10(D)1AXX5X (PIN OUT 1267)

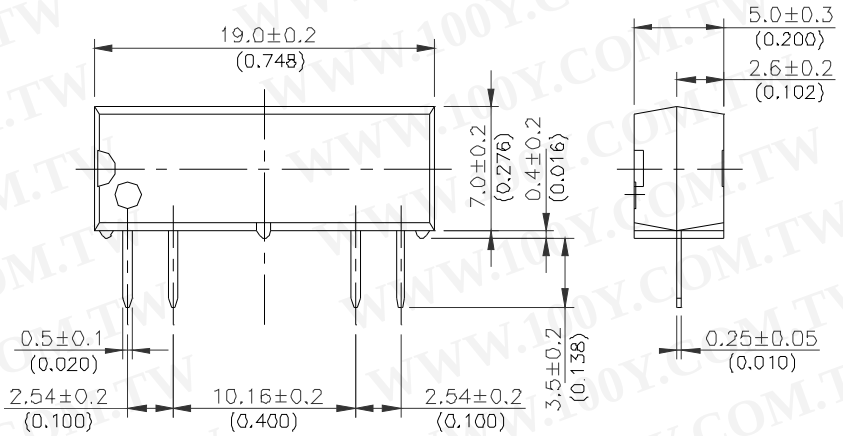

Wiring diagram (Top View)

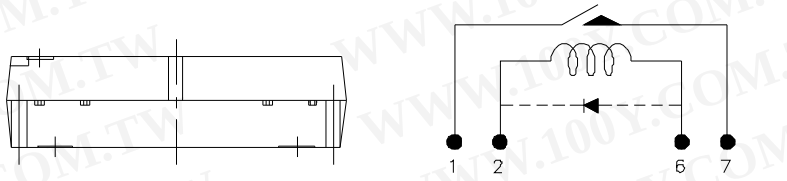


勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw


SIP TYPE

DIMENSIONS Unit:mm(inch)

EDR1M(N)1AXXXX (PIN OUT 1357)

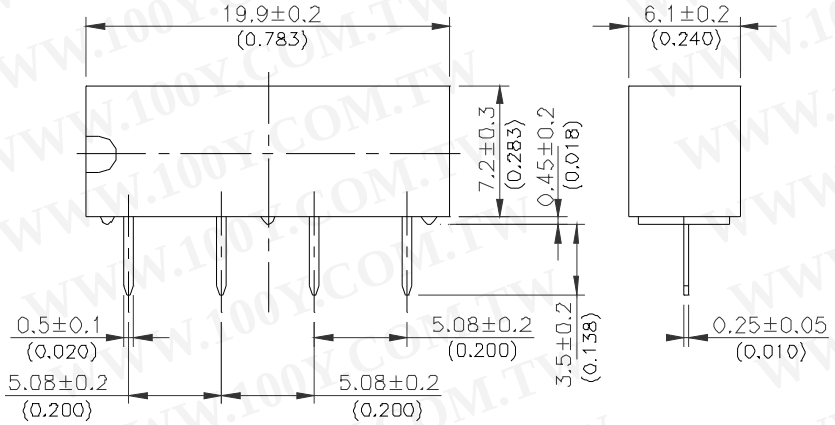


Wiring diagram (Top View)

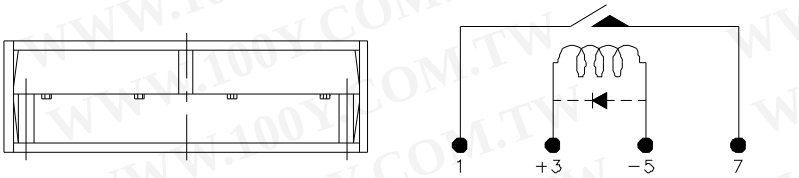


DIMENSIONS Unit:mm(inch)


EDR1M(N)1AXX5X (PIN OUT 1267)

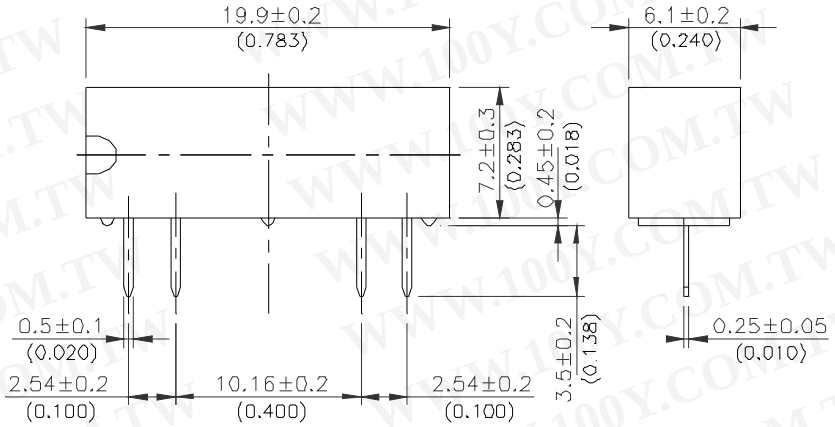


Wiring diagram (Top View)

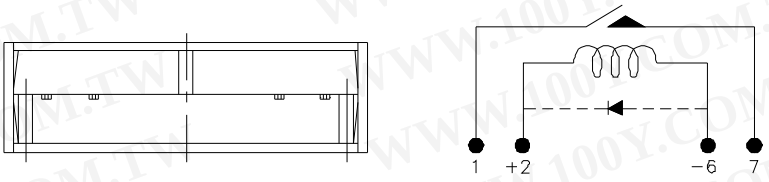

DIP TYPE / SMD TYPE

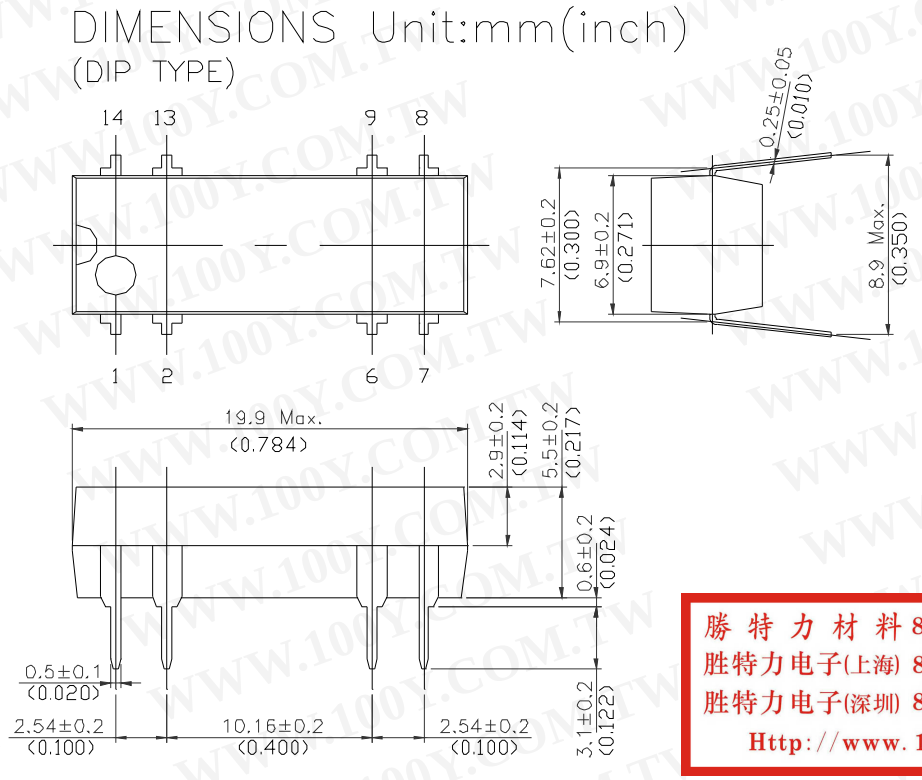


勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

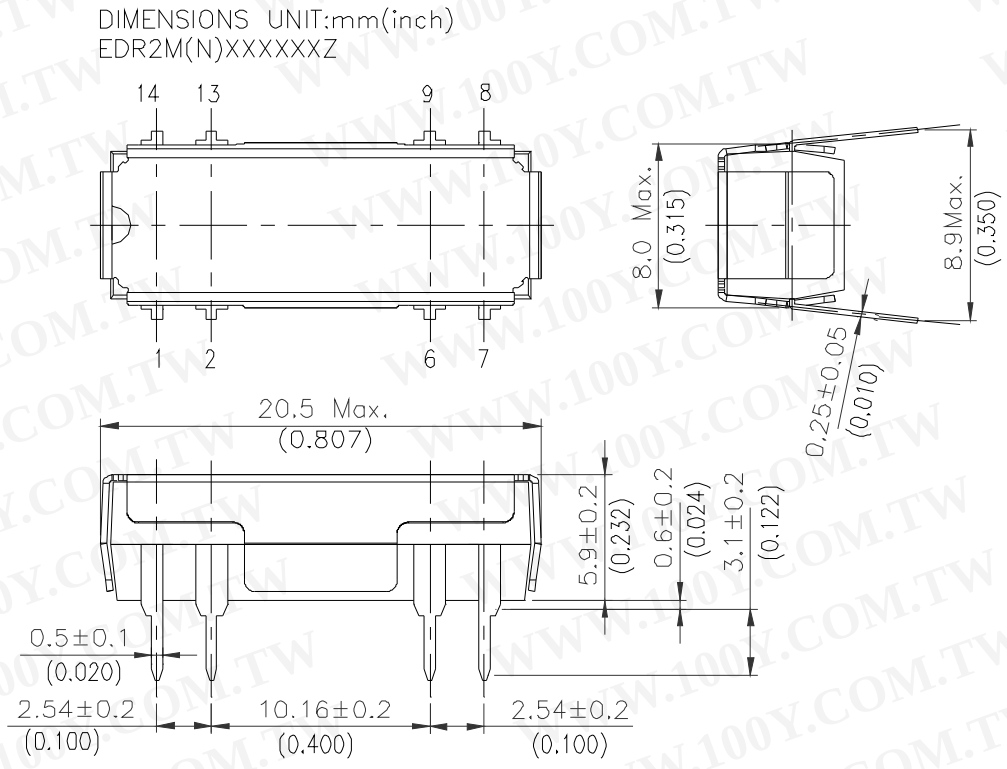


DIMENSIONS Unit:mm(inch)

(SMD-SO TYPE)

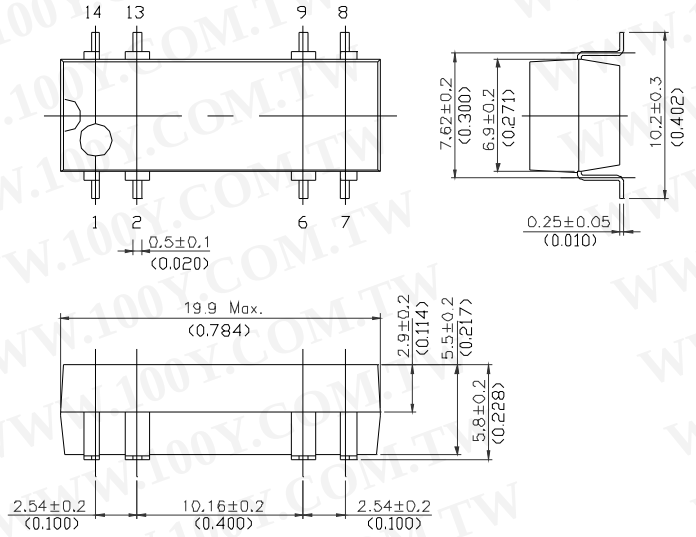


DIMENSIONS UNIT:mm(inch)

EDR3M(N)XXXXXXZ

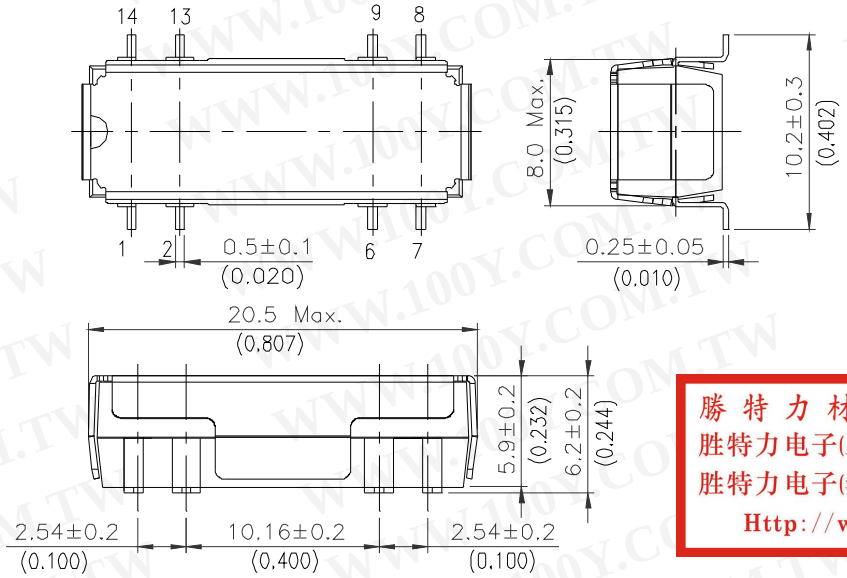

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw


Wiring Diagram (Top View)

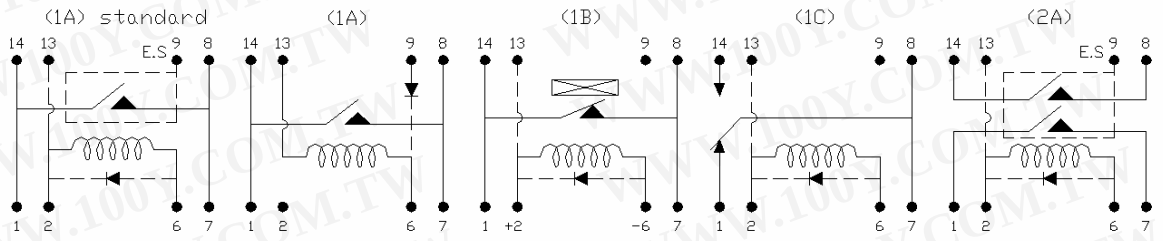

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

HIGH INSULATION TYPE

DIMENSIONS Unit:mm(inch)
(DIP TYPE)

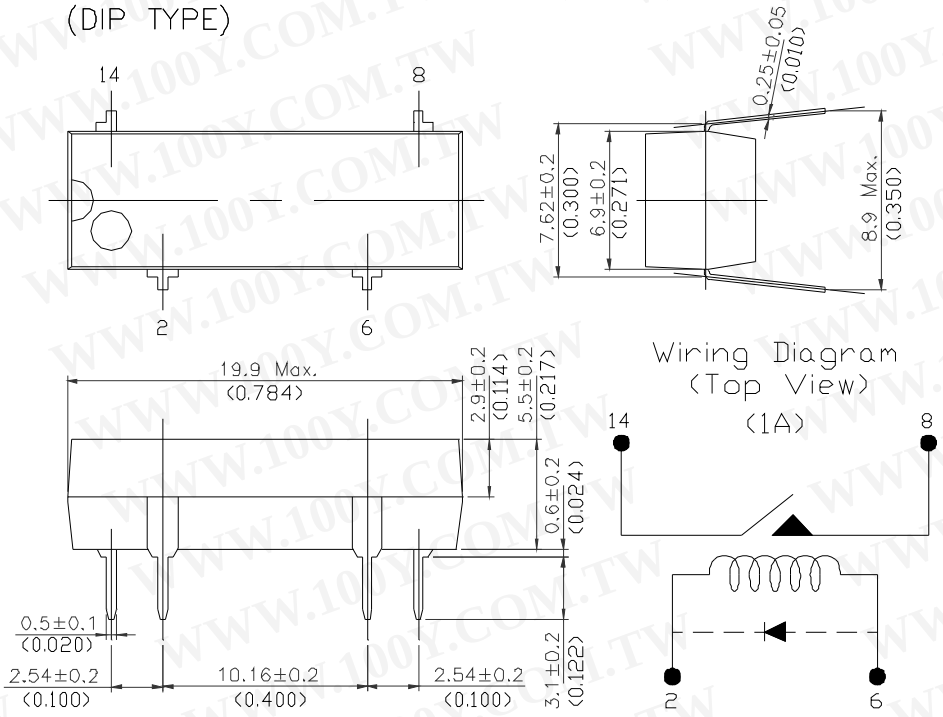

DIMENSIONS Unit:mm(inch)
(SMD-SO TYPE)

