

JQX-105F-1

MINIATURE HIGH POWER RELAY

c  US

File No.:E134517



50010669



File No.:CQC02001001951



Features

- 30A switching capabilities
- PCB coil terminals, ideal for heavy duty load
- 4KV dielectric coil to contact
- Heavy load up to 7,200VA
- Open, Sealed & Unsealed type available
- Class B, Class F insulation available

CONTACT DATA

Contact Arrangement	1A	1B	1C(NO)	1C(NC)
Initial Contact Resistance	50mΩ(at 1A 24VDC)			
Contact Material	AgSnO ₂ , AgCdO			
Max. Switching Capacity	7200VA/560W	3600VA/280W	4800VA/560W	2400VA/280W
Max. Switching Voltage	277VAC/28VDC			
Max. Switching Current	30A	15A	20A	10A
JQX-105F-1 Rating	30A 240VAC 20A 28VDC	15A 240VAC 10A 28VDC	20A 240VAC 10A 28VDC	10A 240VAC 10A 28VDC
JQX-105F-1L Rating	25A 240VAC 20A 28VDC	15A 240VAC 10A 28VDC	20A 240VAC 10A 28VDC	10A 240VAC 10A 28VDC
Mechanical life	1 x 10 ⁷ OPS			
Electrical life	1 x 10 ⁵ OPS			

CHARACTERISTICS

Initial Insulation Resistance	1000MΩ, 500VDC	
Dielectric Strength	Between coil and Contacts	2500/4000VAC, 1min.
	Between open contacts	1500VAC 1min.
Operate time (at nomi. Volt.)	Max. 15ms	
Release time (at nomi. Volt.)	Max. 10ms	
Ambient temperature	Class B	DC:-55°C to +85°C AC:-55°C to +60°C
	Class F	DC:-55°C to +105°C AC:-55°C to +85°C
Shock Resistance	Functional	98 m/s ²
	Destructive	980 m/s ²
Vibration Resistance	DA:1.5mm, 10 to 55Hz	
Humidity	98%, +40°C	
Termination	PCB	
Unit weight	Approx. 36g	
Construction	Sealed IP67, Unsealed, Open (Only for DC Type)	

COIL

Coil power	DC:0.9W AC:2VA
Coil Voltage	5 to 110VDC 12 to 277VAC
Coil Resistance	See table below

SAFETY APPROVAL RATINGS

UL	1 Form A	30A 277VAC 30A 28VDC 2HP 250VAC 1HP 125VAC 277VAC(FLA=20)(LRA=60)
		15A 277VAC 10A 28VDC 1/2HP 250VAC 1/4HP 125VAC 277VAC(FLA=10)(LRA=33)
	1 Form B (NC)	30A 277VAC 20A 277VAC 10A 28VDC 2HP,250VAC 1HP,125VAC 277VAC(FLA=20)(LRA=60)
		20A 277VAC 10A 277VAC 10A 28VDC 1/2HP 250VAC 1/4HP 125VAC 277VAC(FLA=10)(LRA=33)
TüV	1 Form C	15A 250VAC, cos phi=0.4
	NC	



HONGFA RELAY
 ISO9001、ISO/TS16949、ISO14001 CERTIFIED

VERSION: EN02-20040601

COIL DATA

Nominal Voltage VDC	Pick-up Voltage VDC	Drop-out Voltage VDC	Max. allowable Voltage VDC(at 25°C)	Coil Resistance Ω
5	3.75	0.5	6.5	27 $\pm$ 10%
6	4.50	0.6	7.8	40 $\pm$ 10%
9	6.75	0.9	11.7	97 $\pm$ 10%
12	9.00	1.2	15.6	155 $\pm$ 10%
15	11.25	1.5	19.5	256 $\pm$ 10%
18	13.50	1.8	23.4	380 $\pm$ 10%
24	18.00	2.4	31.2	660 $\pm$ 10%
48	36.00	4.8	62.4	2560 $\pm$ 10%
70	52.50	7.0	91	5500 $\pm$ 10%
110	82.50	11	143	13450 $\pm$ 10%

Nominal Voltage VAC	Pick-up Voltage VAC	Drop-out Voltage VAC	Max. allowable Voltage VDC(at 25°C)	Coil Resistance Ω
12	9.6	2.4	15.6	25 $\pm$ 10%
24	19.2	4.8	31.2	100 $\pm$ 10%
120	96.0	24.0	156	2500 $\pm$ 10%
208	166.4	41	270.4	11000 $\pm$ 10%
220/240	192	48	286/312	13490 $\pm$ 10%
277	220	54	360.1	15000 $\pm$ 10%

Note: When require pick-up voltage < 80% of nominal voltage, special order allowed.

ORDERING INFORMATION


JQX-105F-1 / 018 D T 1H S T F				
Type	JQX-105-1: Open * JQX-105F-1L:25A JQX-105F-1:30A			
Coil voltage	DC: 5 to 110VDC AC: 12 to 277VAC			
Coil Input	D: DC A: AC			
Termination	6 : With Pin NO.6, Dielectric Strength Between Coil and Contact: 2500VAC T : Without Pin NO.6, Dielectric Strength Between Coil and Contact: 4000VAC NIL: Without Pin NO.6, Dielectric Strength Between Coil and Contact: 2500VAC			
Contact arrangement	1H: 1A(SPST-NO) 1D: 1B(SPST-NC) 1Z: 1C(SPDT)			
Structure	S: Sealed IP67 Nil: Unsealed			
Contact Material	T: AgSnO ₂ Nil: AgCdO			
Insulation Standard	F: Class F Nil: Class B			

Note: * JQX-105-1 : Open structure, Only for DC type.


OUTLINE DIMENSIONS, WIRING DIAGRAM AND PC BOARD LAYOUT

Outline Dimensions


JQX-105-1(open)

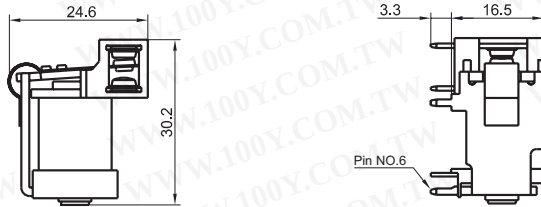

JQX-105F-1(Sealed & unsealed)

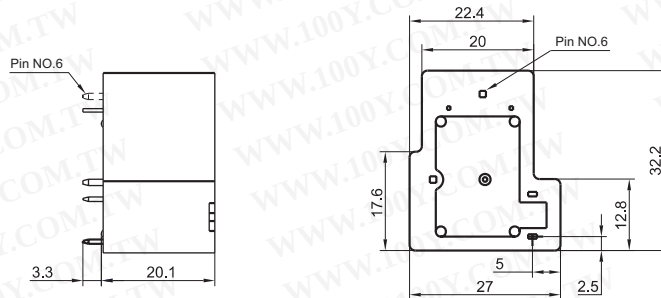


PCB layout



CHARACTERISTICS CURVE

COIL TEMPERATURE RISE

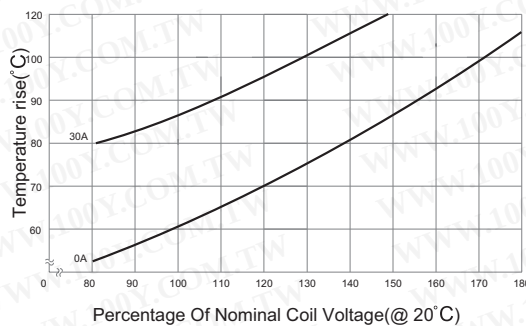

MAXIMUM SWITCHING POWER

