


FEATURES

- Up to 40A switching capacity in 1PST and 20A switching in 1PDT arrangement
- Open-frame and plastic sealed types are available
- Using at home appliances, power switching appliances, car controller, heating, ventilating, and conditioning systems



UL FILE NO.: E126157
CUL FILE NO.: E126157
TUV FILE NO.: R50008132

ORDERING INFORMATION

L90 A S — 12 A W L
1 2 3 4 5 6 7

1. Type

2. Contact Arrangement

Nil : 1 Form C(1PDT)

A : 1 Form A(1PST-NO)

B : 1 Form B(1PST-NC)

3. Common Terminals Type

Nil : Standard Type

S : Without Common Terminal

between coil terminals

4. Coil Nominal Voltage

5. Coil Nominal Voltage Type

Nil : DC

A : AC

6. Enclosure Type

Nil : Open Type

W : Sealed Type

7. L:40A

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

COIL DATA(at 25°C)


DC 0.9 W				AC 1.2 VA			
Coil Nominal Voltage (VDC)	Resistance Tol.±10% (Ohms)	Maximum Pick Up Voltage (V)	Minimum Drop Out Voltage (V)	Coil Nominal Voltage (50/60Hz)	Resistance Tol.±10% (Ohms)	Maximum Pick Up Voltage (V)	Minimum Drop Out Voltage (V)
5	27	3.75	0.5	6	10	5.1	0.6
6	40	4.5	0.6	12	43	10.2	1.2
9	97	6.75	0.9	24	160	20.4	2.4
12	155	9.0	1.2	110	3,160	93.5	11.0
18	380	13.5	1.8	220	13,490	187.0	22.0
24	660	18.0	2.4				
48	2,560	36.0	4.8				
110	1,3450	82.5	11.0				

CONTACT RATING


1A(1PST-NO)	Resistive (Cos.θ = 1)	AC 240V / 30A	AC 277V / 20A	DC 30V / 20A
1B(1PST-NC)	Resistive (Cos.θ = 1)	AC 240V / 20A	AC 277V / 15A	DC 30V / 10A
1C(1PDT)	Resistive (Cos.θ = 1)	NO : AC 240V / 30A	NO : AC 277V / 20A	NO:DC 30V / 20A
	Resistive (Cos.θ = 1)	NC : AC 240V / 20A	NC : AC 277V / 15A	NC:DC 30V / 10A
L:1C(1PDT)	Resistive (Cos.θ = 1)	AC 240V / DC 30V		40A

DIMENSIONS(±0.2mm)

SEALED TYPE

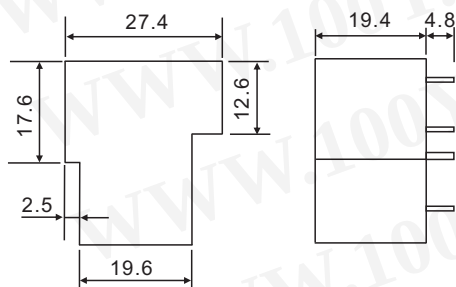


OPEN TYPE

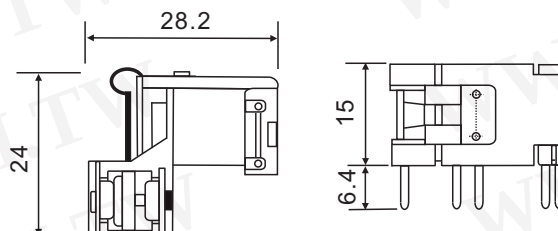


P.C.B LAYOUT
(BOTTOM VIEW)


WIRING DIAGRAM(BOTTOM VIEW)

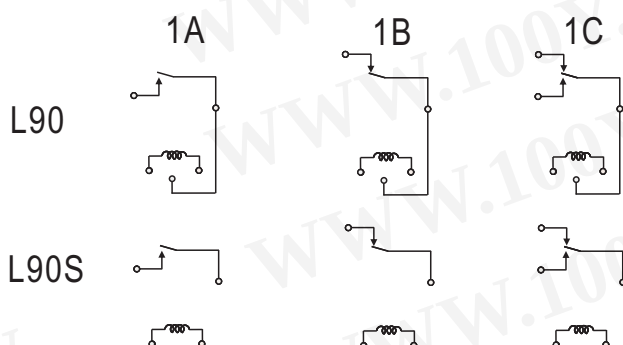

L90



L90S



GENERAL DATA

Insulation Resistance	500 MΩ Min. (DC 500V)
Dielectric Strength	1,500 VAC, 50/60Hz between contact.
	2,000 VAC(L90S:2500), 50/60Hz between all elements
Contact Material	Ag Alloy.
Contact Resistance	50 milliohms max. (initial value)
Shock Resistance	Malfunction: 10G(11ms) ; Destructive: 100G(6ms)
Vibration Resistance	Malfunction: 10 to 55 Hz. at Double Amplitude of 1.5 mm
	Destructive: 10 to 55 Hz. at Double Amplitude of 1.5 mm
Operation Time	15 ms max.
Release Time	15 ms max.
Contact gap	1.0mm
Temperature Range	- 55°C ~ + 85°C
Expected Life	With operation rate 30/min.
	Mechanical - 10,000,000 operations min.
	Electrical - 100,000 operations min. at rated load.
Weight	25 grams