2.54MM EJECTOR HEADER IDC TYPE

MATERIAL

Insulator : 30% Glass fiber PBT
Contact Pin : Copper alloy

SPECIFICATION

Current Rate : 1 AMP
Insulation Resistance : 1000MΩ Min at 500V DC
Contact Resistance : 10mΩ Max.
Dielectric voltage : 500V AC for one minute
Operation Temperature : −40°C to +105°C

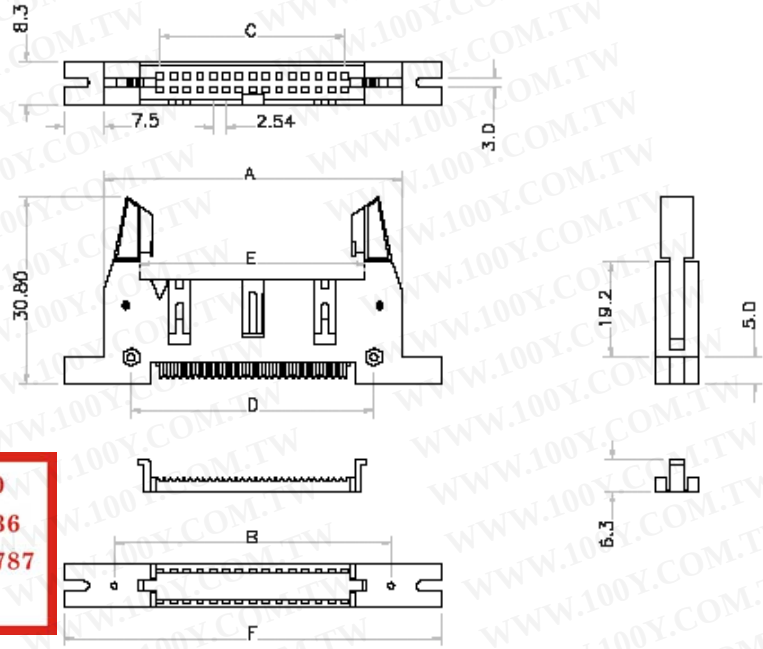

1. No. of contacts(10,14,16,20, 24,26,30,34,40,50,60,64)
2. S: Selective
3. G: Gray
4. 1: With Mounting ear
   2: Without Mounting ear
5. 1: Long ejector
   2: Short ejector

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

No. / Dim.	10	14	16	20	24	26	30	34	40	50	60	64
A	31.96	37.10	39.62	44.74	49.82	52.22	57.46	62.52	70.18	82.70	45.68	100.70
B	25.40	30.48	33.02	38.10	43.18	48.26	53.26	58.42	66.04	78.74	91.44	96.52
C	10.16	15.24	17.78	22.86	27.94	30.48	35.56	40.64	48.26	60.96	73.66	78.74
D	21.84	26.92	29.46	34.54	39.62	42.16	46.74	52.32	59.94	72.64	85.34	90.42
E	17.96	23.04	25.58	30.66	35.74	38.28	43.58	48.44	56.60	68.76	81.45	86.54
F	47.08	52.18	54.84	59.90	64.98	67.24	72.64	77.48	85.36	97.90	110.66	115.62

UNIT : mm