

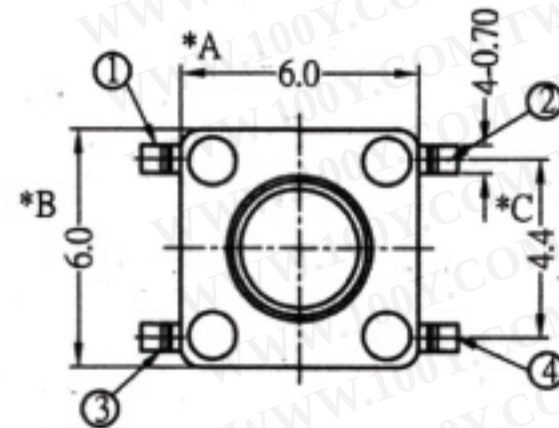


REVISION		
POSITION	DESCRIPTION	DATE
△	Add Dimension (0.15mm Max)	2007-08-29
△	From 0.15mm Max change to $0_{-0.10}^0$ mm	2009-03-02
△	From spn strip change to sus	2010-03-15

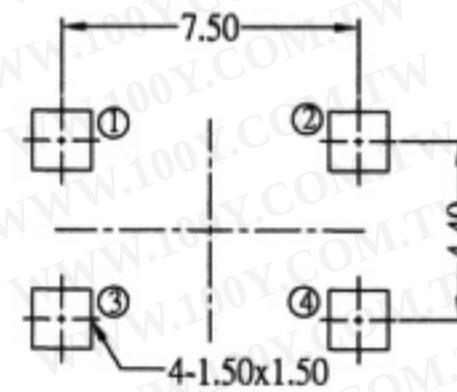

P.C.B. LAYOUT



SCHEMATIC



Table 1: stem height

SX= (height)	S	4.3mm
	SA	5.0mm
	SD	7.0mm
	SH	9.5mm
	SJ	13.0mm
	SE	7.3mm
	SF	8.0mm
	SN	9.0mm
	SI	12.5mm
	SK	13.5mm
	SL	17.0mm

Table 2: operation force

F= (force)	0	100gf
	1	130gf
	-	160gf
	2	250gf

P/N SYSTEM
HTS-6601SX-F

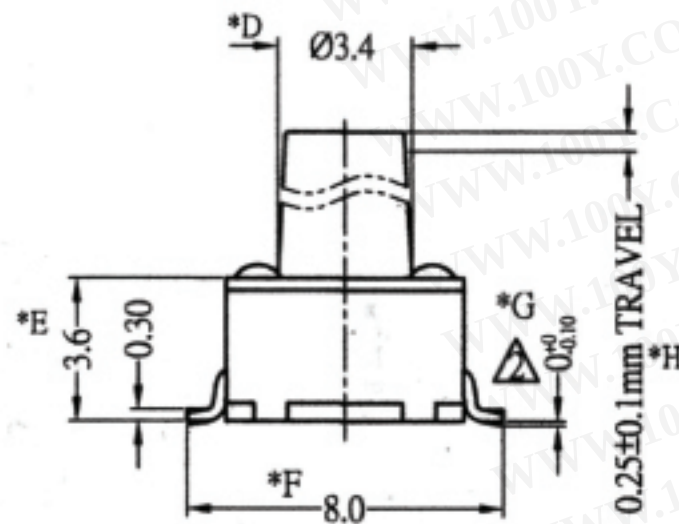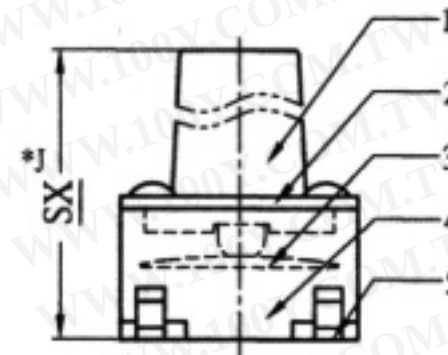

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

*CRITICAL DIMENSION

www.100y.com.tw

SERIES :TACT SWITCH

PART NAME: HTS-6601SX-F

UNIT : M M

SCALE : 5:1

REV : A/3

DWN.

CHK'D

APPD.

DRAWING NO: HT -ENL-TS4082



GENERAL TOLERANCE

WITHIN 0.XXmm±0.15mm

OVER 0.Xmm±0.25mm

7				
6				
5	TERMINAL	BRASS STRIP	4	Ag COATING
4	CASE	PA6T	1	BLACK
3	CONTACT	C5210R-EH	1	Ag CLAD
2	COVER	SUS △	1	NATURAL
1	STEM	PA6T	1	ABOVE
NO.	PART NAME	MATERIAL	QTY	FINISHING

REVISION		
POSITION	DESCRIPTION	DATE
△		

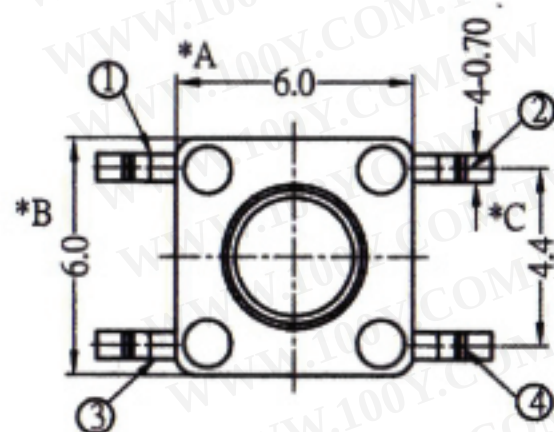




SCHEMATIC

P/N SYSTEM
HTS-6601SX-F-10

Table 1: stem height

SX= (height)	S	4.3mm
	SA	5.0mm
	SD	7.0mm
	SH	9.5mm
	SJ	13.0mm
	SE	7.3mm
	SF	8.0mm
	SN	9.0mm
	SI	12.5mm
	SK	13.5mm
	SL	17.0mm

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-34970699
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

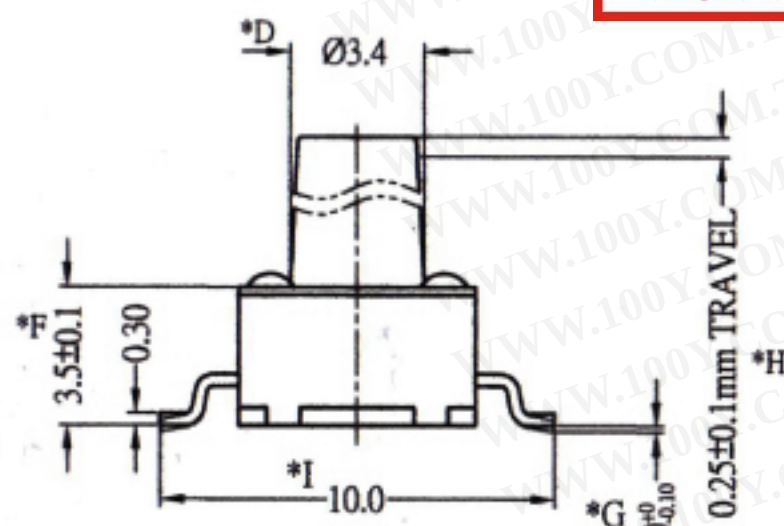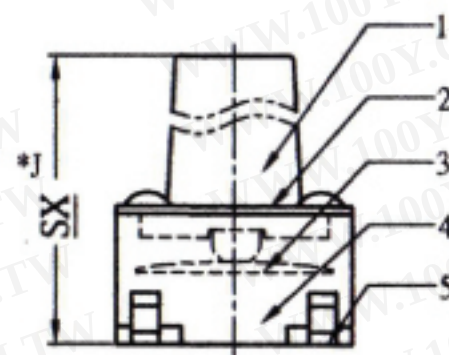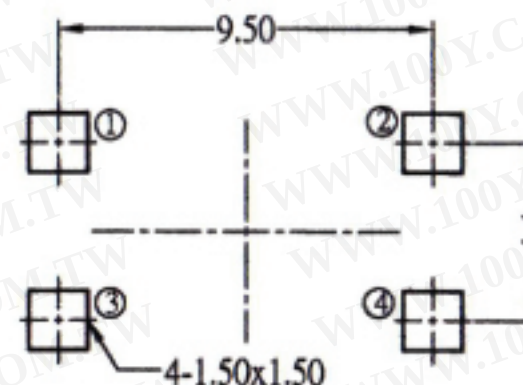

P.C.B.LAYOUT

Table 2: operating force

F= (force)	0	100gf
	1	130gf
	-	160gf
	2	250gf

*CRITICAL DIMENSION

www.100y.com.tw

SERIES :TACT SWITCH

PART NAME: HTS-6601SX-F-10

UNIT : M M

SCALE : 5:1

REV : A/0

DWN.

CHK'D

APPD.

DRAWING NO: HT-ENL-TS4494

GENERAL TOLERANCE

WITHIN 0.XXmm±0.15mm

OVER 0.Xmm±0.25mm



NO.	PART NAME	MATERIAL	QTY	FINISHING
7				
6				
5	TERMINAL	BRASS STRIP	4	Ag COATING
4	CASE	PA6T	1	BLACK
3	CONTACT	C5210R-EH	1	Ag CLAD
2	COVER	SUS430	1	NATURAL
1	STEM	PA6T	1	BLACK