

MICRO SWITCH
a Honeywell Division
FED. MFG. CODE 91929

SWITCH – ENCLOSED

CATALOG LISTING
BZE6–2RN

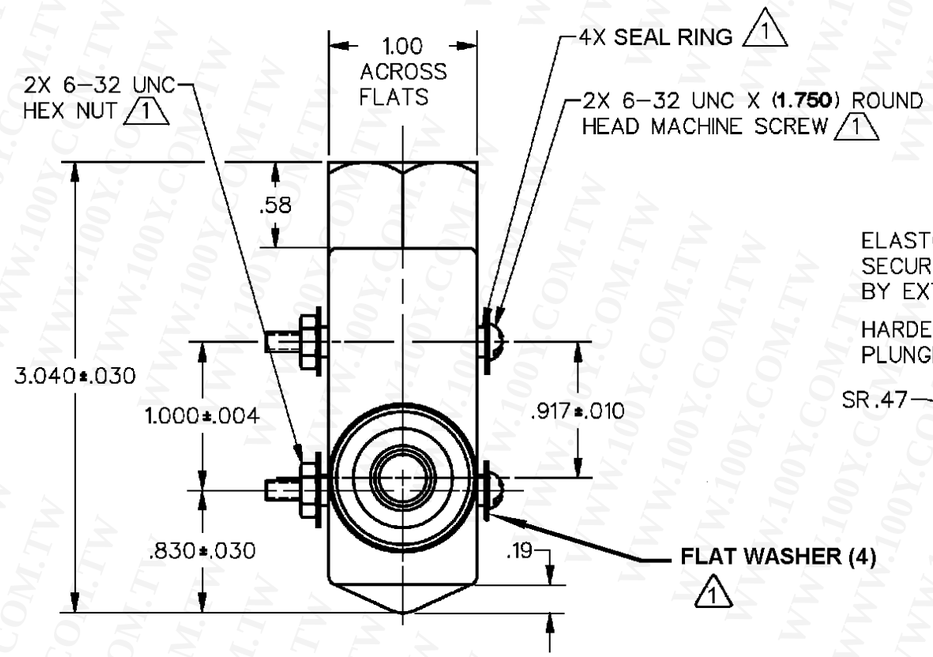

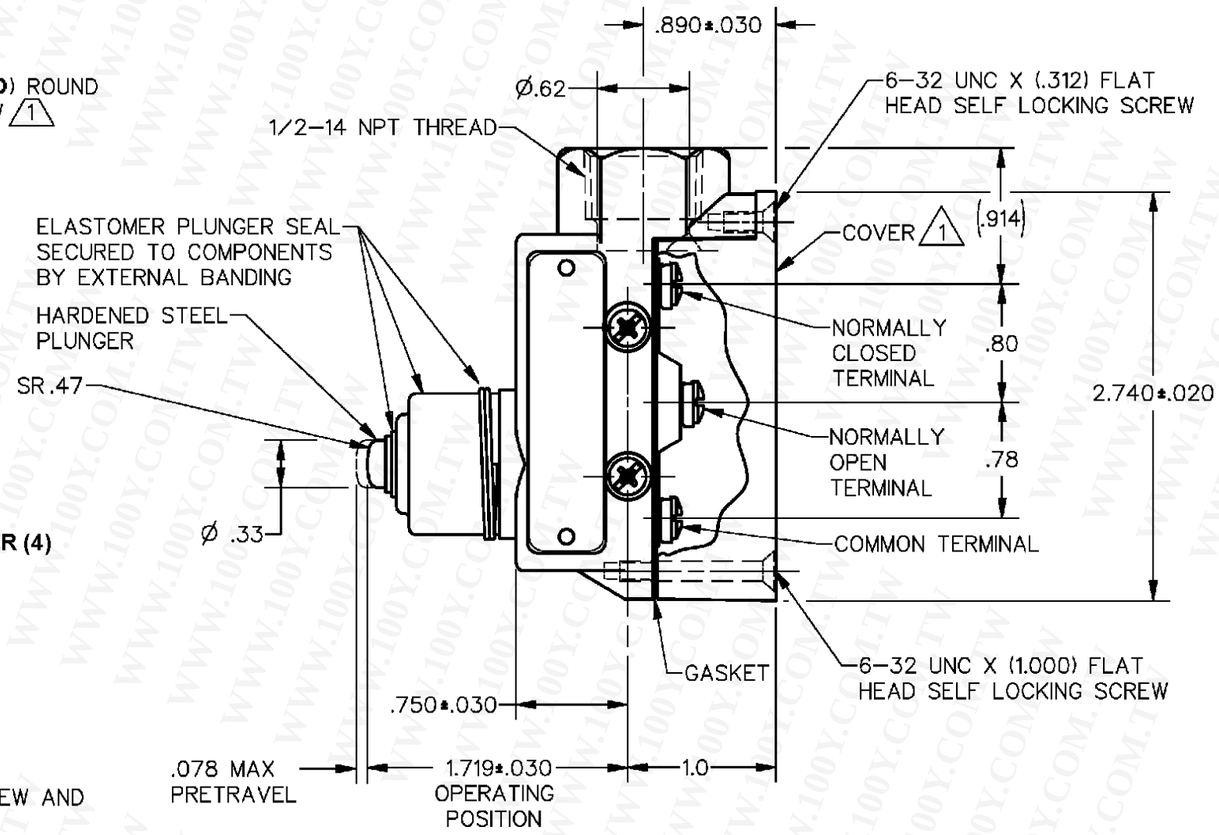

NOTE
1 FURNISHED UNASSEMBLED
2 – 3X 6–32 UNC X (.219) BINDING HEAD TERMINAL SCREW AND CUPWASHER
3 - SEAL RATING: NEMA 1,3,4
IP66

VKR
22 NOV 05

CHARACTERISTICS	
OPERATING FORCE	9–24 OZ
RELEASE FORCE	4 OZ MIN
DIFFERENTIAL TRAVEL	.002 MAX
OVERTRAVEL	.219 MIN
BASIC SWITCH REPLACEMENT	BZ–2RQ77

ELECTRICAL DATA

CONTACT ARRANGEMENT
S P D T

L74
15A 125, 250 OR 480 VAC
2A 600 VAC
1/8HP 125 VAC, 1/4HP 250 VAC
1/2A 125 VDC, 1/4A 250 VDC
CE 1.5A, 240 Vac

THIRD ANGLE PROJECTION

SCALE FULL

DO NOT SCALE PRINT

UNLESS OTHERWISE SPECIFIED TOLERANCES ARE

ONE PLACE	(.0)	±.030
TWO PLACE	(.00)	±.015
THREE PLACE	(.000)	±.005
ANGLES		±

WEIGHT .56 LB

ANSI Y14.5M–1982 APPLIES

THIS DRAWING COVERS A PROPRIETARY ITEM AND IS THE PROPERTY OF MICRO SWITCH, A DIVISION OF HONEYWELL. THIS DRAWING IS NOT TO BE COPIED OR USED WITHOUT THE APPROVAL OF MICRO SWITCH

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

CATALOG LISTING BZE6–2RN
ISSUE M 15
REPLACES PSR 29AUG07
RELEASE NO. CHECK DVM 21AUG06
CHECK BP 22 NOV 05
CHECK SAV 5 OCT 92
DRAWN RASTER

REVISIONS

A	CO–73736	SAV 5 OCT 92	
B	CO–73655	TSM 21 APR 93	
C	CO–77179A	KDR 17 FEB 94	
D	0017057	VKR 22 NOV 05	
E	0023923	RKP 21AUG06	
F	0025947	KNS 30OCT06	
G	0033014	BS 29AUG07	