
OMRON

Sealed Tactile Switch

B3W

Through-hole-mounting Switches That Are Mounting-compatible with B3F Series. Sealed Structure for High Reliability

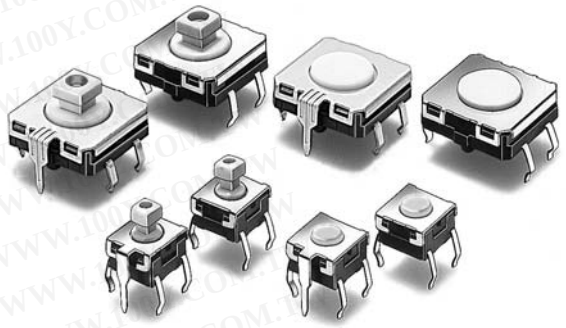

- Sealed construction conforming to IP67 (IEC-60529) provides high reliability in locations exposed to dust or water. (* Excluding the terminal section.)
- Available in two sizes: 6 × 6 mm and 12 × 12 mm sizes.
- Ground terminal available to protect against static electricity.
- B32-series Key Tops mount to models with projected plungers.

RoHS Compliant

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

■ List of Models

6 × 6 mm Models

Type	Contact material	Plunger	Height	Operating force (OF)	Plunger color	Bags			
						Without ground terminal	Minimum packing unit	With ground terminal	Minimum packing unit
B3W-1000 Series	Silver plated	Flat type 	4.3 mm	1.57 N {160 gf} max.	White	B3W-1000	100 pcs	B3W-1100	100 pcs
				2.26 N {230 gf} max.	Yellow	B3W-1002		B3W-1102	
			5.0 mm	1.57 N {160 gf} max.	White	B3W-1020		---	
				2.26 N {230 gf} max.	Yellow	B3W-1022		---	
		Projected type 	7.3 mm	1.57 N {160 gf} max.	White	B3W-1050		B3W-1150	
				2.26 N {230 gf} max.	Yellow	B3W-1052		B3W-1152	

Note: Bulk Packaged, 100 switches per bag. Order in multiples of the package quantity.

12 × 12 mm Models

Type	Contact material	Plunger	Height	Operating force (OF)	Plunger color	Bags			
						Without ground terminal	Minimum packing unit	With ground terminal	Minimum packing unit
B3W-4000 Series	Silver plated	Flat type 	4.3 mm	1.96 N {200 gf} max.	White	B3W-4000	100 pcs	B3W-4100	100 pcs
				3.43 N {350 gf} max.	Yellow	B3W-4005		B3W-4105	
		Projected type 	7.3 mm	1.96 N {200 gf} max.	White	B3W-4050		B3W-4150	
				3.43 N {350 gf} max.	Yellow	B3W-4055		B3W-4155	

Note: Bulk Packaged, 100 switches per bag. Order in multiples of the package quantity.

■ Ratings/Characteristics

Rating (resistive load)	1 to 50 mA, 3 to 24 VDC
Minimum applicable load (reference value)	10 μA at 1 VDC (resistive load)
Ambient operating temperature	-25°C to +70°C at 60%RH max. (with no icing or condensation)
Ambient operating humidity	35% to 85% (at +5 to +35°C)
Contact form	SPST-NO
Contact resistance (initial value)	100 mΩ max.
Insulation resistance	100 MΩ min. (at 250 VDC with insulation tester)
Dielectric strength	500 VAC, 50/60 Hz for 1 min
Bounce time	5 ms max.
Vibration resistance	Malfunction: 10 to 55 Hz, 1.5 mm double amplitude
Shock resistance	Destruction: 1,000 m/s^2 {approx. 100 G} max. Malfunction: 100 m/s^2 {approx. 10 G} max.
Durability	B3W-1000: 1.57 N (standard force):1,000,000 operations min. 2.26 N (high-force):300,000 operations min. B3W-4000: 1.96 N (standard force):3,000,000 operations min. 3.43 N (high-force):1,000,000 operations min.
Weight	6 × 6 mm: approx. 0.3 g, 12 × 12 mm: approx. 1 g
Degree of protection	IEC IP67
Washing	Possible

■ Operating Characteristics


6 × 6 mm Models

Type	B3W-1000 series	
Operating force (OF)	1.57 N	2.26 N
Item / Model	B3W-1□□0	B3W-1□□2
Operating force (OF)	1.57 N {160 gf} max.	2.26 N {230 gf} max.
Releasing force (RF)	0.2 N {20 gf} min.	0.49 N {50 gf} min.
Pretravel (PT)	$0.25^{+0.2}_{-0.1}$ mm	

12 × 12 mm Models

Type	B3W-4000 series	
Operating force (OF)	1.96 N	3.43 N
Item / Model	B3W-4□□0	B3W-4□□5
Operating force (OF)	1.96 N {200 gf} max.	3.43 N {350 gf} max.
Releasing force (RF)	0.29 N {30 gf} min.	0.49 N {50 gf} min.
Pretravel (PT)	$0.3^{+0.2}_{-0.1}$ mm	

■ Model Structure

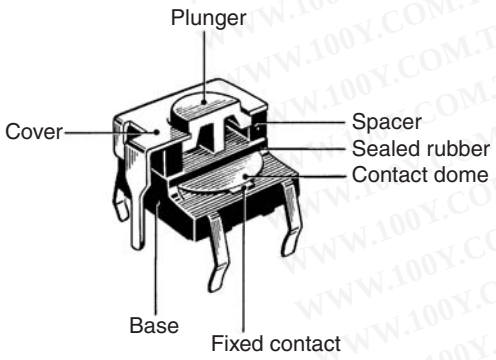

■ Dimensions (Unit: mm)

Note: The numbers used for terminals in the following graphics are indicated in the "Bottom View" diagram below. In this diagram, the Switch is rotated so that the terminals are on the right and left-hand sides, and the OMRON logo appears the right way up.




■ 6 × 6 mm Models


Flat Plunger Type (without Ground Terminal)

B3W-1000
B3W-1002




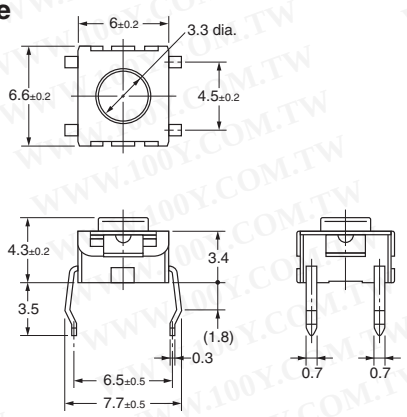

PCB Processing Dimensions (Reference Only) (Top View) (PCB thickness, t=1.6)




Terminal Arrangement /Internal Connections (Top View)




Flat Plunger Type (with Ground Terminal)

B3W-1100
B3W-1102




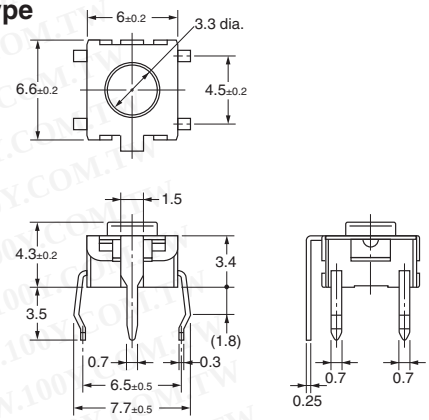

PCB Processing Dimensions (Reference Only) (Top View) (PCB thickness, t=1.6)

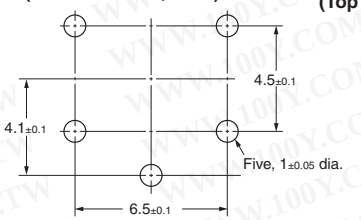



Terminal Arrangement /Internal Connections (Top View)




Flat Plunger Type (without Ground Terminal)

B3W-1020
B3W-1022




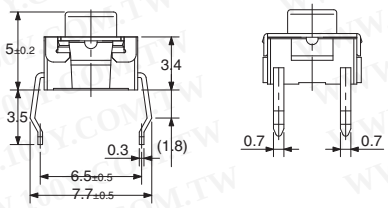

PCB Processing Dimensions (Reference Only) (Top View) (PCB thickness, t=1.6)




Terminal Arrangement /Internal Connections (Top View)




Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions. No terminal numbers are indicated on the Switches.


Projected Plunger Type (without Ground Terminal)

B3W-1050
B3W-1052




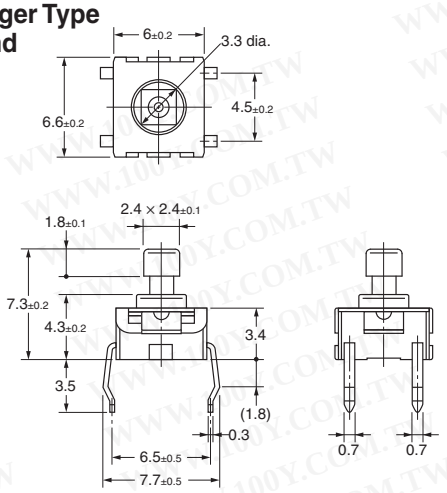

PCB Processing Dimensions (Reference Only) (Top View) (PCB thickness, t=1.6)





Terminal Arrangement /Internal Connections (Top View)




Projected Plunger Type (with Ground Terminal)

B3W-1150
B3W-1152




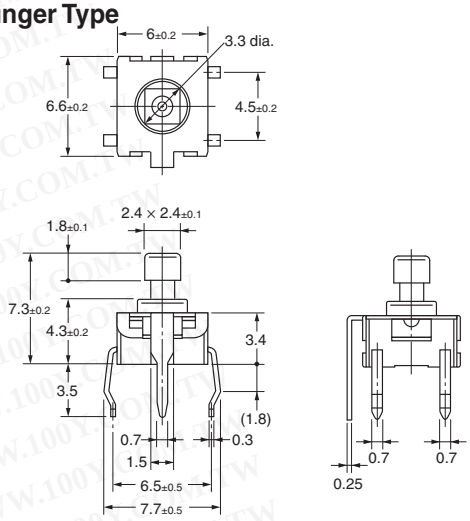

PCB Processing Dimensions (Reference Only) (Top View) (PCB thickness, t=1.6)

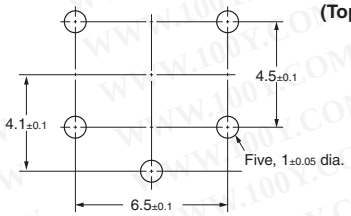

Terminal Arrangement /Internal Connections (Top View)




Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions. No terminal numbers are indicated on the Switches.

■ 12 × 12 mm Models


Flat Plunger Type (without Ground Terminal)

B3W-4000
B3W-4005




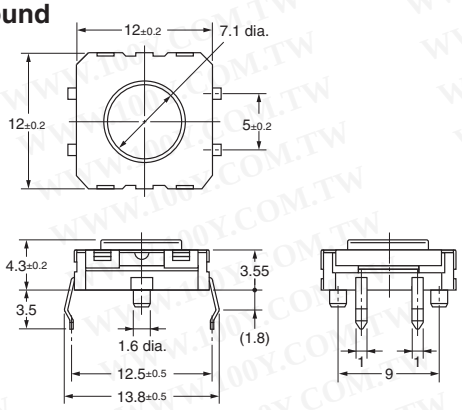

PCB Processing Dimensions (Reference Only) (Top View) (PCB thickness, t=1.6)





Terminal Arrangement /Internal Connections (Top View)




Flat Plunger Type (with Ground Terminal)

B3W-4100
B3W-4105




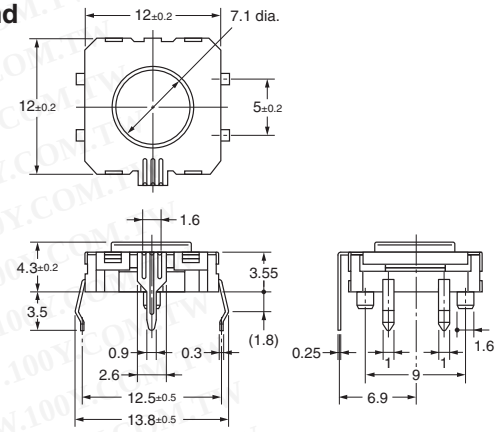

PCB Processing Dimensions (Reference Only) (Top View) (PCB thickness, t=1.6)

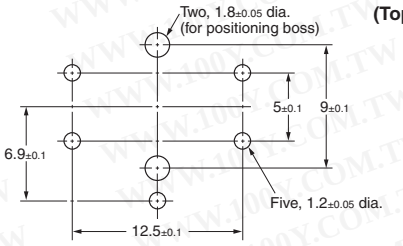


Terminal Arrangement /Internal Connections (Top View)




Projected Plunger Type (without Ground Terminal)

B3W-4050
B3W-4055




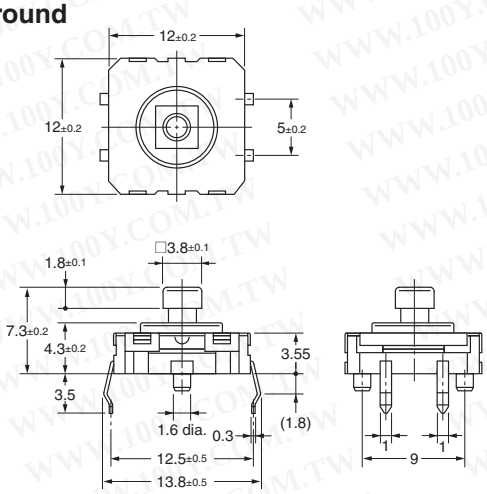

PCB Processing Dimensions (Reference Only) (Top View) (PCB thickness, t=1.6)




Terminal Arrangement /Internal Connections (Top View)




Projected Plunger Type (with Ground Terminal)


B3W-4150
B3W-4155



PCB Processing Dimensions (Reference Only) (Top View) (PCB thickness, t=1.6)

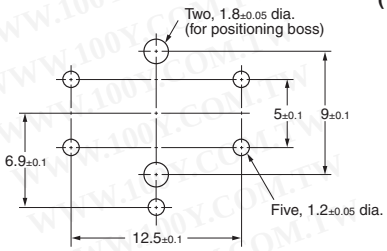

Terminal Arrangement /Internal Connections (Top View)



Note: Unless otherwise specified, a tolerance of ±0.4 mm applies to all dimensions.

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-34970699
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw