


Z15G1□04

勝特力材料 886-3-5753170
 勝特力电子(上海) 86-21-54151736
 勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

OF	160g
RF min	42g
PT max	2.7mm
OT min	2.4mm
MD max	0.5mm
FP max	32.5mm
OP	30.2±0.4mm

15A 125VAC or 250VAC

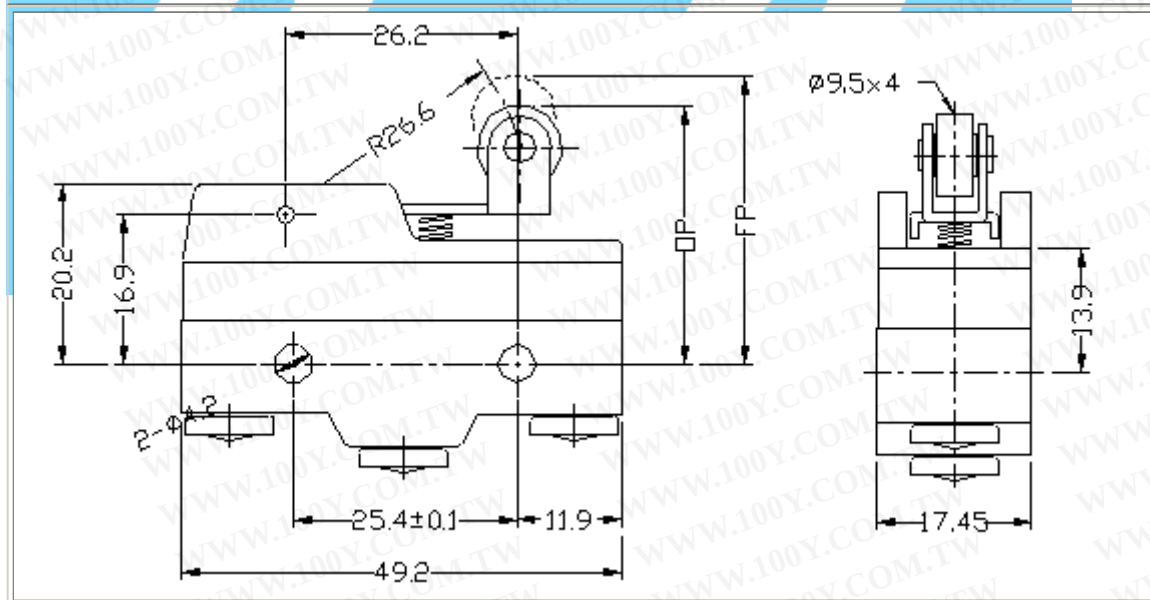

CHARACTERISTICS:

Contact resistance: $15\text{m}\Omega$ max. (initial)

Insulation resistance: $100\text{M}\Omega$ min. (at 500VDC)

Dielectric strength: $1,000\text{VAC}$ $50/60\text{Hz}$ for 1 minute

Service life:

Mechanically : 1,000,000 operations min.

Electrically: 100,000 operations min.

15A 125VAC or 250VAC



Order Instruction:

Z 15 G13 00
1 2 3 4


1.Type

2.Current

3.Terminal



4.Series No

Mounting hole:


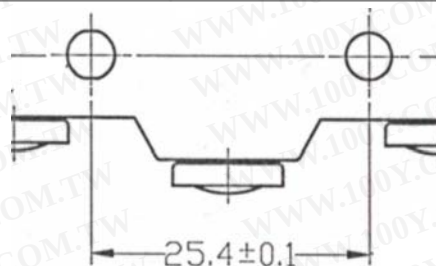


Terminals:

Screw terminal:

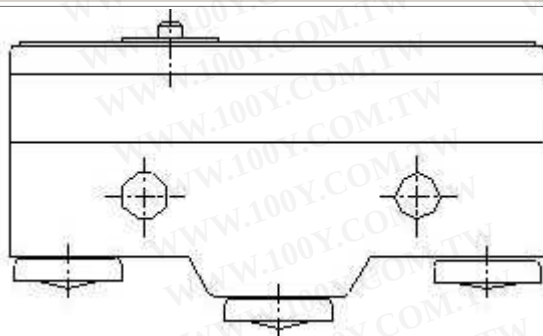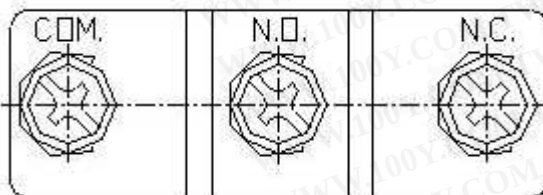

Solder terminal:

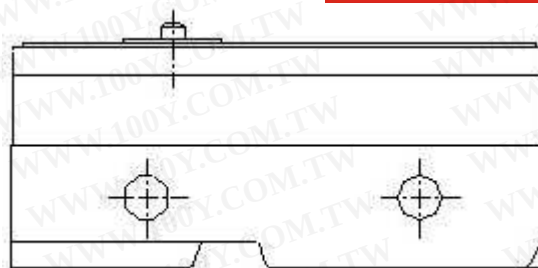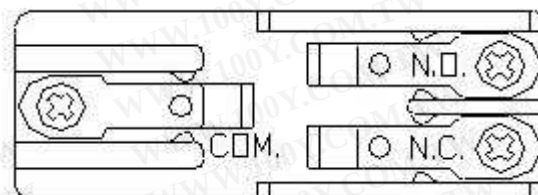

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)