


5EHDR(2EHDR) - Bi-level type / Pluggable type TB

Technical Data	UL	IEC
Pitch	5.00mm(5.08mm)	
Rated voltage	300V	250V
Rated current	15A	17.5A
Insulation withstand voltage	2KV	
Approval		

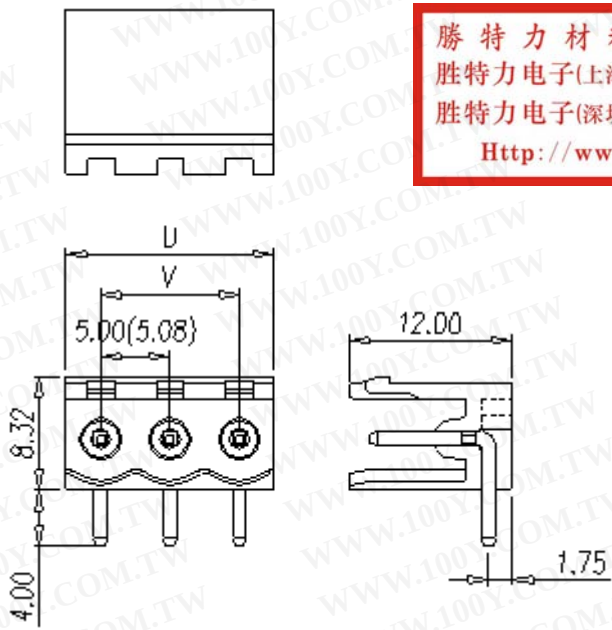

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)