

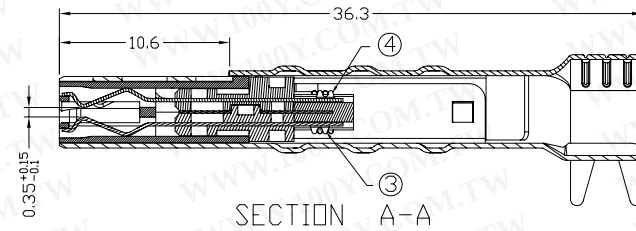
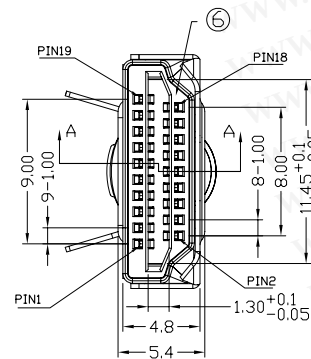


REV	ZONE	REVISION	DATE

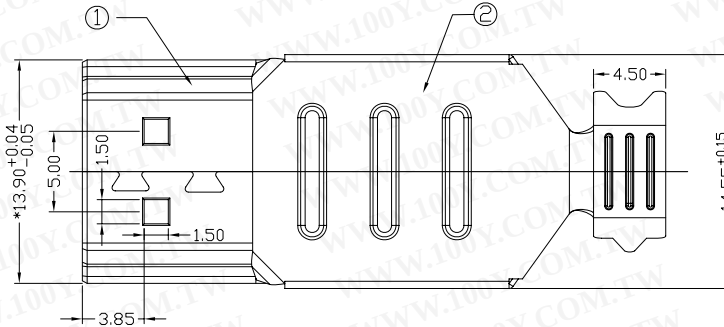


NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	FRONT SHEEL	BRASS/SPCC	GOLD/NI PLATED	1	Gold15u"/ Ni80~120u"
2	BACK SHEEL	SPCC	NI PLATED	1	Ni:80~120u"
3	TERMINAL	PBS T:0.20 PBT+GF15%	GOLD/TIN PLATED	10	Gold15u"/ Ni:40~60u" Tin120~200u"
4	TERMINAL	PBS T:0.20 PBT+GF15%	GOLD/TIN PLATED	9	Gold15u"/ Ni:40~60u" Tin120~200u"
5	SEPTA	PBT+GF15% STAINLESS		1	
6	BODY	LCP+GF30%		1	



**Green
Product**

NO.	DIM A	DIM B	DIM C	DIM D	CABLE SIZE
1	11.80	3.80	10.60	1.50	Ø7.30
2	10.20	3.10	9.39	1.00	Ø6.50
3	9.10	2.60	8.70	0.63	Ø5.50

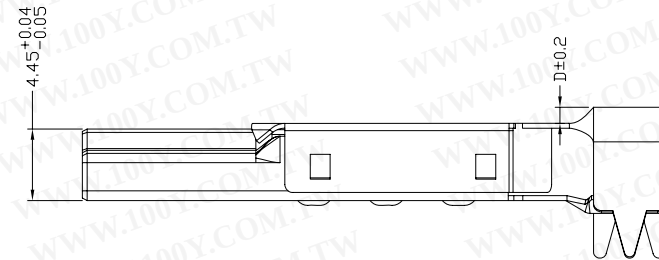

Specification:

- ❖ Contact Resistance: Unmated Plug Socket, 30m Ohm. Maximum.
Mated Plug Socket, 60m Ohm. Maximum.
- ❖ Insulation Resistance: 100M Ohm Min. At 500 VDC.
- ❖ Rated Voltage And Current: AC 40V,0.5A Minimum.
- ❖ Dielectric Withstanding Voltage: 500V AC (rms) For 1 Minute.
- ❖ Insertion Force: Type A- 44.1N Maximum.
- ❖ Extraction Force: Type A- 9.8N Minimum,39.2N Maximum.
- ❖ Durability: Type A- 10000 Cycles At 100±50 Cycles Per Hour.
Life Test After: Type A-Insertion/Extraction Force: 6N Minimum.
- ❖ Operating Temperature: -20°C ~ +85°C.

勝特力材料 886-3-5753170
勝特力电子(上海) 86-21-54151736
勝特力电子(深圳) 86-755-83298787
[Http://www.100y.com.tw](http://www.100y.com.tw)

COMPUTER NO.			UNIT	SCALE	PART NAME	
D:\DWG\HDMI-KPKW01-A03N2-L			mm	1:1	HDMI PLUG	
APPD.	CKD.	DWG.	DATE	TOLERANCE	PART NO.	REV.
		TINA	03-01-08	X. ±0.38 .X ±0.25 .XX ±0.13 .XXX ±0.05		A0

MODEL HDMI-KPKW01-A03N2-L PAGE 1 OF 1