REV	ZONE	REVISION	DATE

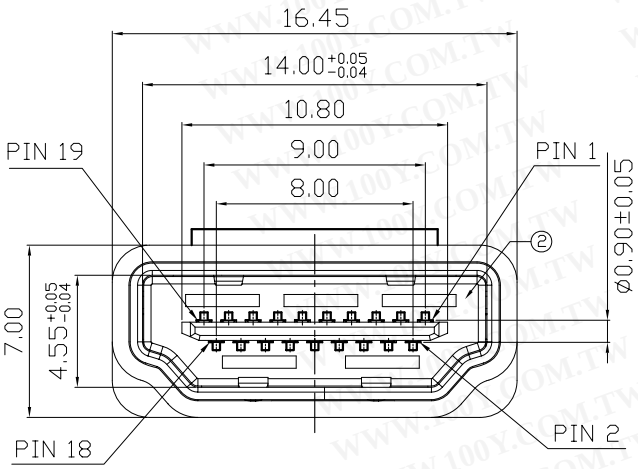

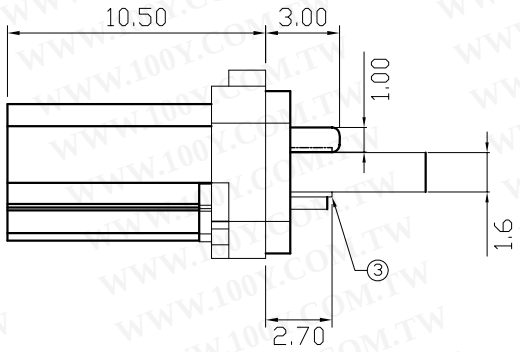

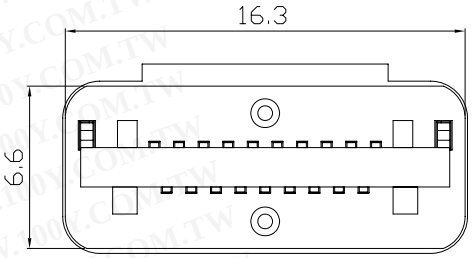

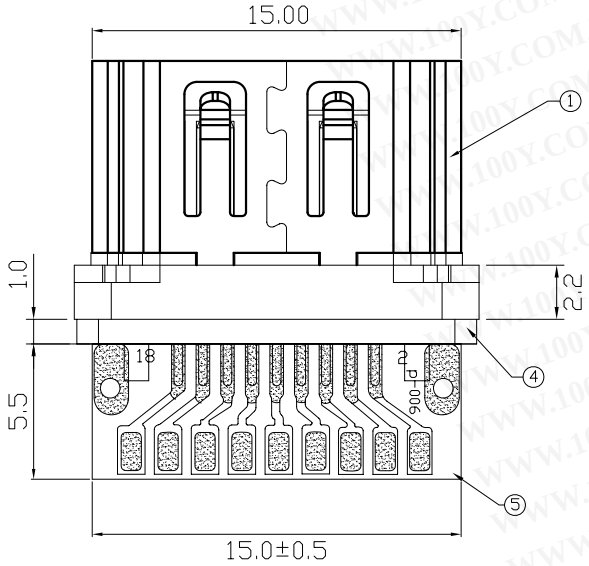

Specification:

- Contact Resistance: Unmated Plug Socket, 30m Ohm. Maximum.
  Mated Plug Socket, 60m Ohm. Maximum.
- Insulation Resistance: 100M Ohm Min. At 500 VDC.
- Rated Voltage And Current: AC 40V,0.5A Minimum.
- Dielectric Withstanding Voltage: 500V AC (rms) For 1 Minute.
- Insertion Force: Type A- 44.1N Maximum.
- Extraction Force: Type A- 9.8N Minimum,39.2N Maximum.
- Durability: Type A- 10000 Cycles At 100±50 Cycles Per Hour.
  Life Test After: Type A-Insertion/Extraction Force: 6N Minimum.
- Operating Temperature: -20°C ~ +85°C.

NO.	NAME	MATERIAL	FINISH	Q'TY	REMARK
1	SHELL	BRASS T:0.50	NICKEL PLATED	1	Ni:80~120u"
2	BODY	LCP+GF30%	GRAY	1	
3	TERMINAL	PHOS. BRONZE T:0.20	GOLD/TIN PLATED	19	Gold:15u"; Ni:40~60u" Tin:120~200u"
4	COVER	LCP+GF30%	GRAY	1	
5	PCB	PCB T:1.6		1	

Green Product

勝 特 力 材 料 886-3-5753170
胜特力电子(上海) 86-21-54151736
胜特力电子(深圳) 86-755-83298787
Http://www.100y.com.tw

COMPUTER NO.			UNIT	SCALE	PART NAME	
D:\DWG\HDMI-KRKB00-A13N2-L			mm	1:1	HDMI A RECEPTACLE	
APPD.	CKD.	DWG.	DATE	TOLERANCE	PART NO.	REV.
		TINA	07-10-08	X. ±0.38 .X ±0.25 .XX ±0.13 .XXX ±0.05		A0

MODEL	HDMI-KRKB00-A13N2-L	PAGE 1 OF 1